


Bollard Series

LUMEN SELECTABLE SQUARE BOLLARD


Lumen Output | 1800 lm | 2700 lm

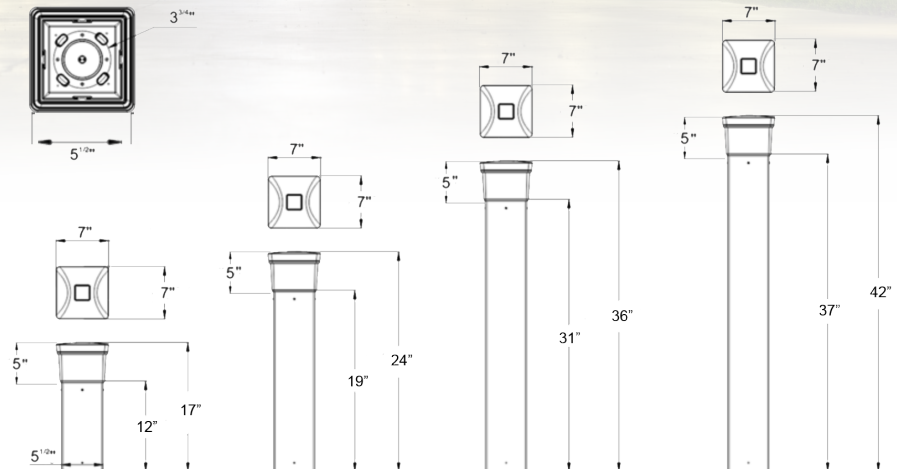

Our Square Bollard is a stylish, fully integrated LED solution for many outdoor applications. It features a sleek, modern design and is carefully engineered with an expected L70 LED lifetime of over 50,000 hours and up to 70% in energy savings over comparable 100W metal halide luminaires. The BOLS Bollard is a reliable low maintenance lighting solution that produces sites that are exceptionally illuminated.

TECHNICAL DATA

PRODUCT	BOL-S
WATTAGE	20W/ 30W
LUMENS	1800 LM/ 2700 LM LUMEN SELECTABLE
CC	3000K/ 4000K/ 5000K COLOR CHANGEABLE
EFFICACY	90 LM/W
VOLTAGE	100 - 277VAC
IP RATING	IP65
THD	<15
CRI	>70
POWER FACTOR	0.9
WORKING TEMP.	-31°F ~ 122°F
L70 LIFESPAN	OVER 50,000 HRS



360° LIGHT PATTERN

AVAILABLE ACCESSORIES



4PCS BOLTS
*Included



ANC-BOL
Anchor for Bollard
*Sold Separately

INTENDED USE

The Bollard Series is ideal for illuminating building entrances, pathways, pedestrian plazas, accent landscaping, parking areas, and many more.

OPTICS

Symmetrical optical distributions. IP65 sealed LED light engine provides smoothly graduated illumination without uplight. Light engines CCT are field selectable at 3000K/4000K/ 5000K.

