
DOT5S WALL & CEILING MOUNT

Spitzer LIGHTING

INSTALLATION MANUAL

PRODUCT PARAMETER	
INPUT VOLTAGE	120Vac
DISTRIBUTION	FULL ILLUMINATE
WORKING TEMP.	-4˚F~104˚F



SAFETY INFORMATION


BE SURE THE POWER IS OFF! RISK OF ELECTRICAL SHOCK: Always use the switch to power o . Do not perform any operations while this unit is powered on. The electrical system you want to connect the device to must be grounded. Read the instructions before using or powering this device. The safety instructions must remain with the unit in case of transfer. Any damage to the device linked to an inappropriate use is excluded from support by the warranty. Before connecting, make sure that the current and voltage are compatible with this device. We highly recommend that all installations are made by QUALIFIED ELECTRICIAN. We are NOT responsible by any means for the use or misuse of the following information. We are NOT responsible in whole or part for any harm or dama ge that may or may not be caused. We reserve the right to revise the components of any product, due to part availability or change ETL, CUL, UL standards without assuming any obligation or liability to modify any products previously manufactured and without notice. These instructions do not cover all details of variations in equipment, nor do they provide every possible contingency to be met. Turn o / unplug power when installing or service device.

PRE - INSTALLATION

- Read carefully before installing fixture. Retain for future reference.
- Failure to follow instructions may result in serious injury or death
- Upon receipt the fixture, throughly inspect for any freight damage which should be brought to the attention of the delivery carrier. Compare the catalog description listed on the package slip with the fixture label on the housing to assure you have received material.
- This fixture must be wired in accordance with the international electrical code and applicable local codes and ordinances. Proper grounding is required to insure personal safety. Carefully observe the correct grounding procedure under installation section.


SURFACE/WALL INSTALLATION(Caution beginning installation turn off the circuit breaker and light switch)

STEP 1

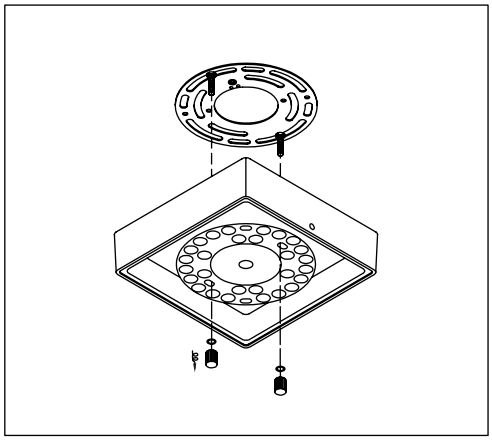


Remove the mounting plate from LED engine module.

STEP 2

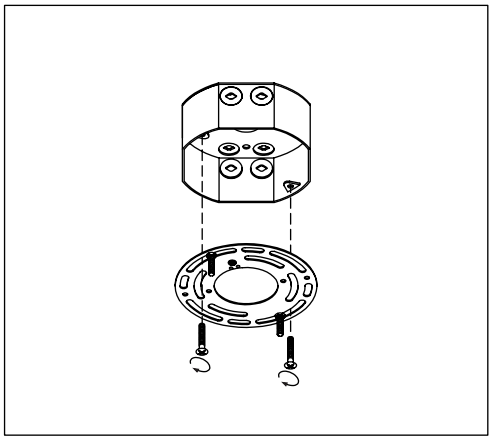


Fasten the mounting bracket to J-box.

STEP 3

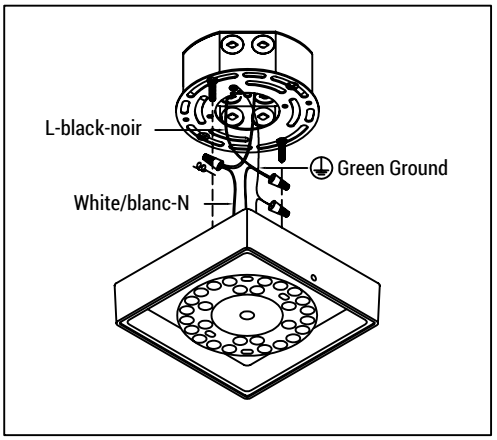


Connect the supply wires to the fixture wires using the supplied electrical wire connectors.

STEP 4

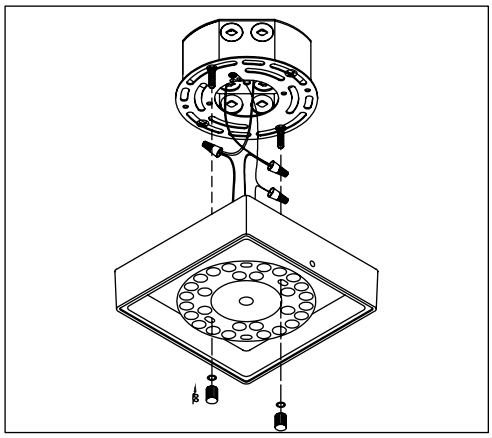


Secure the lamp body to the mounting plate using the aluminum cap, making sure it is firmly in place.

STEP 5

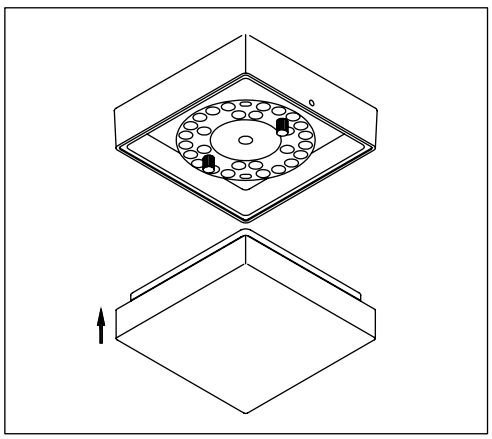

Put on the glass cover.

STEP 6

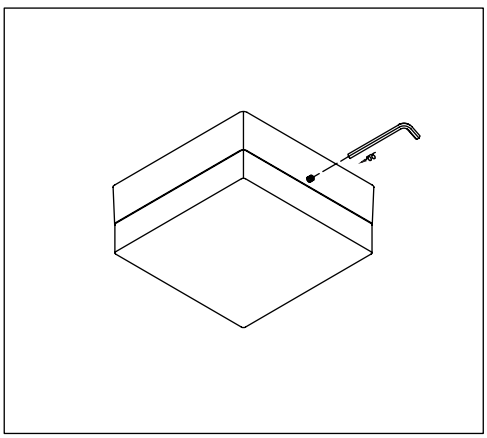


Use a hex wrench to tighten the hex screws on the lamp body to reinforce the glass cover.

DOT5S WALL & CEILING MOUNT

INSTALLATION MANUAL

WIRING DIAGRAM (Caution: Before beginning replacement turn off the circuit breaker and light switch)

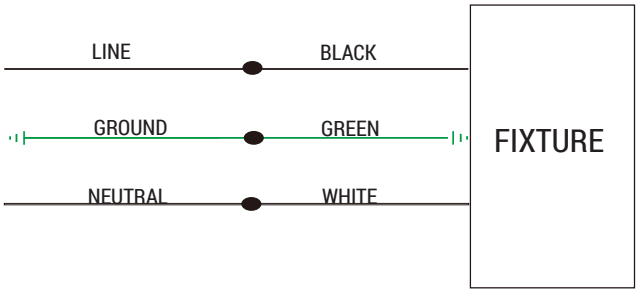

Refer to the wire diagram for power connections. Step1: Connect the black fixture lead to the (+)LINE supply lead. Step2: Connect the white fixture lead to the (-)NEUTRAL supply lead. Step3: Connect the green wire from fixture to GROUND supply lead.