

EASY SEEM-LESS UNLIMITED CONNECTIVITY



TECHNICAL SUMMARY

SIZE:	6-cell module, connectable, see dimension details
WATTAGE:	8W
LUMEN/EFFICACY	500LM* / 65LM/W
INPUT VOLTAGE	120-277Vac
AVAILABLE CCT/CRI	2700/3000/3500/4000/5000K CCT changeable / 90+ CRI
CONTROL	Triac dimming at 120Vac (10% to off)
VALIDATIONS	ETL & cETL damp location listed, IC rated, FCC compliant, JA8 title 24
LIFETIME	L70>56,000 hours, 5 year warranty
DISTRIBUTION	Beam 24°, 36°, and 50°; Asymmetric wall wash
OPERATION TEMP.	(-5°F ~ 104°F)
FINISH	White, Black, Bronze




*Delivered lumen may vary, refer to photometric for full performance data



SCAN ME TO
DOWNLOAD
SPEC SHEET

DIMENSIONS FOR DAR, DAS, DAW

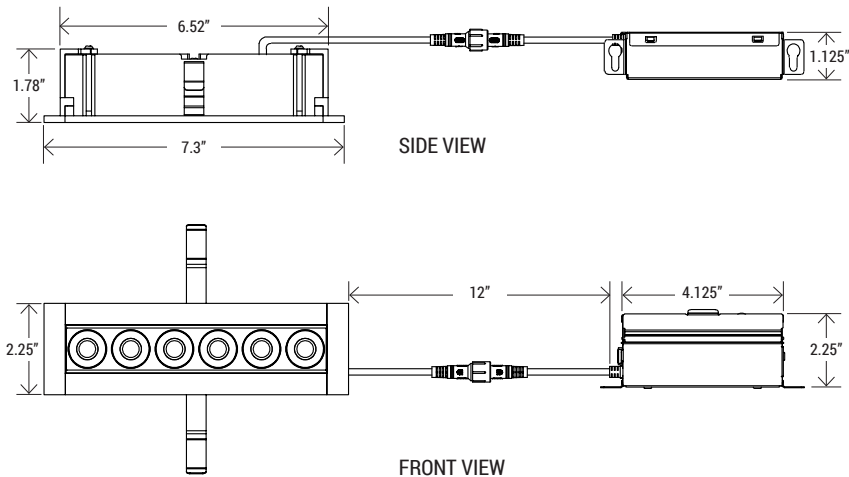

APERTURE	1" (W) x 6.25" (L) connectible
CEILING CUTOUT (Single)	1" (W) x 6.75" (L) connectible
CEILING CUTOUT (Double)	12.5" (W) x 1.875" (L) connectible
FLANGE	2.25" (W) x 7.25" (L) connectible
HEIGHT	1.75"
REGRESSION	0.75"
VISUAL CUTOFF	42° - 45°