


DIRECT MOUNT CANLESS DOWNLIGHT WITH DEEP ARCH BEZEL



DBR
(Black)

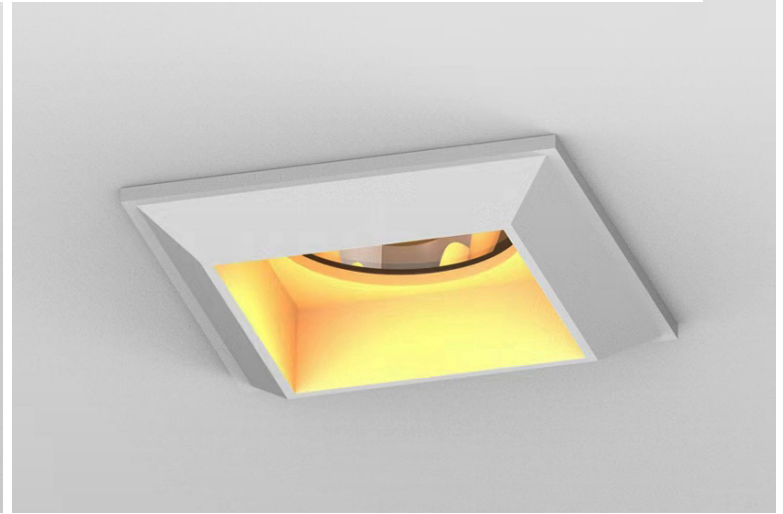

DBS
(Black)



DBR
(White)



DBS
(White)



SCAN ME TO
DOWNLOAD
SPEC SHEET

TECHNICAL SUMMARY

SIZE:	Aperture 2.6" OD or 2.6"x2.6", Overlap trim 3", Height 2.8"
WATTAGE:	12W
LUMEN/EFFICACY	800LM* / 70LM/W
INPUT VOLTAGE	120-277Vac
AVAILABLE CCT	27/30/35/40/50K CCT changeable, 3000-1800K warm dim (optional)
CRI	CRI >90
CONTROL	Triac dimming at 120Vac, 0-10V dimming optional, warm dim optional
VALIDATIONS	ETL & cETL damp location listed, IC rated, FCC compliant, JA8 title 24
LIFETIME	L70>56,000 hours, 5 year warranty
DISTRIBUTION	Beam 24, 36, and 50 degree
OPERATION TEMP.	-5°F ~ 104°F
FINISH	White, Black, Other

*Delivered lumen may vary, refer to photometric for full performance data

DIMENSIONS FOR DBR, DBS

