

BRA - Architectural Round Bollard

Elegantly designed with visual-comfortable illumination performance

IK08 vandal resistant lens and housing

Type III and V distribution with dark sky compliant option

Optional -4°F emergency battery backup driver





SCAN ME TO
DOWNLOAD
SPEC SHEET



T3/T5



T3/T5

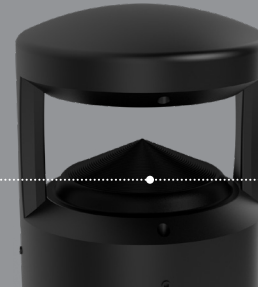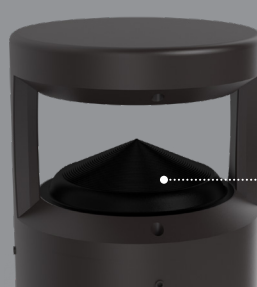


ZERO UPLIGHT
OPTIC D3/D5

TECHNICAL SUMMARY

SIZE:	24" and 42" Overall height
WATTAGE:	30/25/18/12W
LUMEN/EFFICACY* (T3/T5)	2500/2100/1500/1000LM, 85LM/W
LUMEN/EFFICACY* (D3/D5)	2400/2000/1400/950LM, 80LM/W
INPUT VOLTAGE	120-277Vac or 277-480Vac
AVAILABLE CCT/CRI	30/40/50K changeable, 70+CRI, Custom
VALIDATIONS	ETL and cETL wet location listed, IP65 and IK08 rated, Dark sky compliant (D3/D5 option), FCC compliant, RoHS
DISTRIBUTION	Type V (D5 or T5), Type III (D3 or D5)
OPERATION TEMP.	-40°F ~ 122°F / -4°F ~ 122°F (with EM)
FINISH	Black, Dark Bronze, Custom

*Delivered lumen may vary, refer to photometric for full performance data

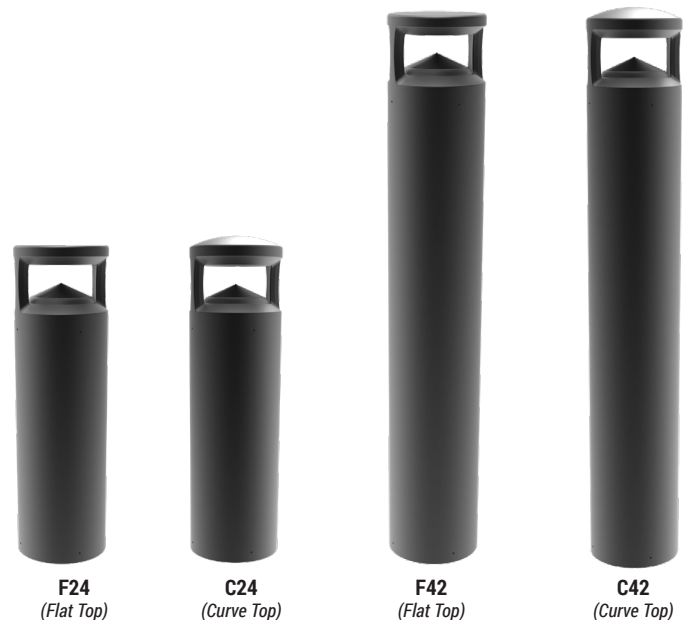

F24
(Flat Top)

C24
(Curve Top)

F42
(Flat Top)

C42
(Curve Top)