

GOOSENECK SERIES

Spitzer
LIGHTING

OUTDOOR

Gooseneck Luminaire

Type:

Fixture:



TECHNICAL DATA

PRODUCT	BL-GSNKYD
WATTAGE	42W
LUMENS	3800 LM
EFFICACY	90 LM/W
CCT	4000K, 5000K
VOLTAGE	100 - 277V
BEAM ANGLE	90°
CRI	>80
THD	<20%
POWER FACTOR	>0.99
WORKING TEMP.	-40°F ~ 104°F

DESCRIPTION

Our Gooseneck is an old-fashioned style fixture featuring modern technology illumination and operation. Any structure face needing multiple downlight beam angles. The dusk-to-dawn sensor allows for thoughtless operation and money savings. Choose black or white to suit the door.

INTENDED USE

The Gooseneck is ideal for upper building surrounds like restaurants, store fronts, or any business needing a professional and clean look.

ACCESSORIES INCLUDED



ORDERING INFORMATION

	-		-		-		-	
Series	Wattage	Voltage	CCT	Finish				
BL-GSNKYD - (Gooseneck)	42W	02 - (100 - 277)	40K - (4000K) 50K - (5000K)	B - (Black) W - (White) RAL - (Custom)*				

*Additional cost and/or lead time on customized fixtures may apply. Customized fixtures can not be returned.

GOOSENECK SERIES

Spitzer
LIGHTING

OUTDOOR

Gooseneck Luminaire

Type:

Fixture:

CONSTRUCTION

Heavy-duty die cast aluminum housing, photocell included.

FINISH

Rust and Corrosion proof with polyester powder coating.

OPTICS

High light transmittance polycarbonate with UV protection.
Dusk-to-dawn photocell.

ELECTRICAL


Class 2, Constant Current, 100 - 277V, 50/60 Hz, 0.95Amp@100V.

LISTINGS


ETL certified. Luminaire is IP65 rated.

*IES files available upon request

DIMENSIONS

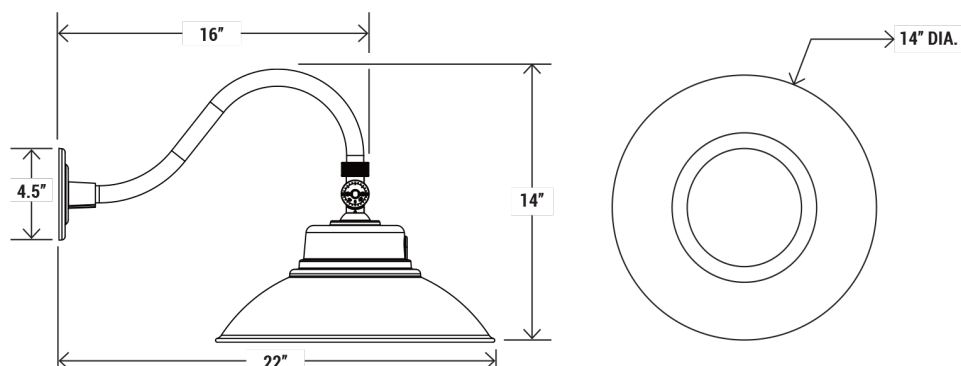

PRODUCT FEATURE

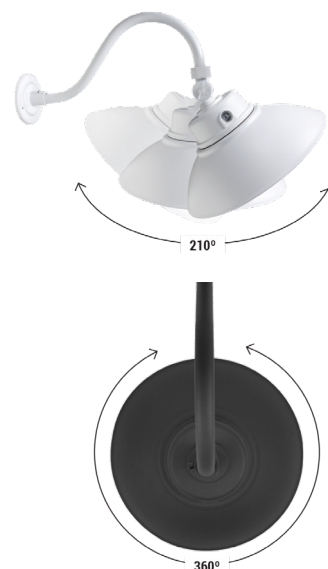

Provides light output in a 360° light disbursement form