

CELIA WS

Wall Mount Square Architectural Concrete Cylinder


MODEL NO.	TYPE	PROJECT/DATE
-----------	------	--------------

KEY FEATURES

- Visual appealing concrete stone material housing creates an exceptional architectural texture perception
- Highly resistant to rust and decay caused by high humidity, chemical or other environmental factors
- Regressed lens with 90 CRI LED creates a low-glare, visual comfortable direct and indirect illumination

TECHNICAL SUMMARY

SIZE:	4"x4" and 6"x6" aperture, Direct and Direct/indirect housing
WATTAGE:	4" direct: 10W, 4" direct & indirect: 20W 6" direct: 15W, 6" direct & indirect: 30W
LUMEN*	4" direct: 1000LM, 4" direct & indirect: 2000LM 6" direct: 1400LM, 6" direct & indirect: 2800LM
EFFICACY	UP TO 95 LM/W at 3000K
INPUT VOLTAGE	120-277Vac
AVAILABLE CCT/CRI	Available in 3000K, 4000K, Custom / 90 CRI standard
CONTROL	On/off with 0-10V dim to 1% to off driver
VALIDATIONS	ETL wet location Listed, IP54 and IK06 rated, FCC, RoHS
LIFETIME	L90>50,000 hours, 5 year warranty
OPERATION TEMP.	Normal: -13°F ~ 113°F / Emergency: 0°F ~ 113°F
FINISH	Dark Gray, Silver Gray, Sandy White Made to order: Terracotta Red

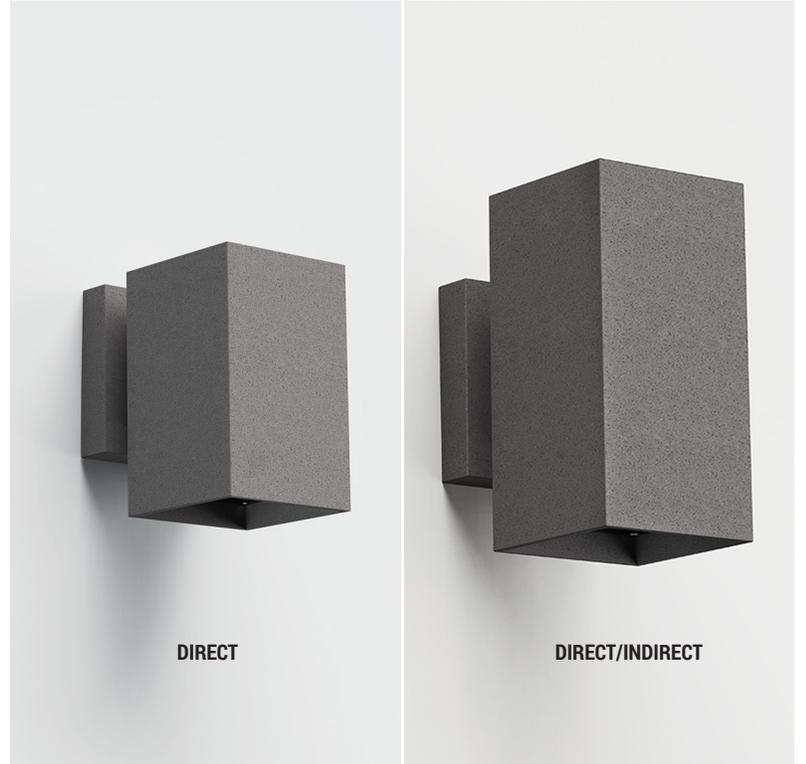


AVAILABLE FINISH: SHOWN IS DIRECT



*Delivered lumen may vary, refer to photometric for full performance data



DIMENSIONS

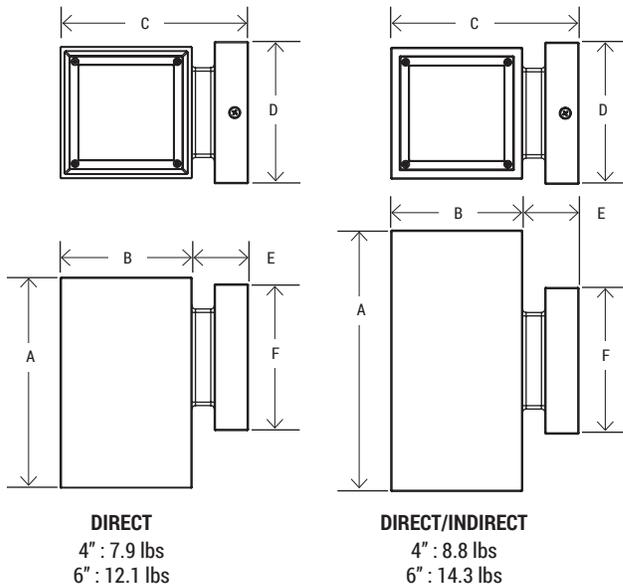

Size	A	B	C	D	E	F
4" (Direct)	7.3"	4.5"	6.5"	4.9"	2"	5"
4" (Direct/Indirect)	9"	4.5"	6.5"	4.9"	2"	5"
6" (Direct)	8.5"	5.7"	7.8"	5.7"	2"	6"
6" (Direct/Indirect)	10.6"	5.7"	7.8"	5.7"	2"	6"

CELIA WS

Wall Mount Square Architectural Concrete Cylinder

MODEL NO.	TYPE	PROJECT/DATE
-----------	------	--------------


ORDERING INFORMATION

*Additional cost and/or lead time on customized fixtures may apply.

Series	Style	Size	Lumen Package	Input Voltage	CCT	Light Distribution	Control	Finish
CEL	WS - (Wall mount square)	4D - 4" direct only 4A - 4" direct /indirect 6D - 6" direct only 6A - 6" direct /indirect	10L - 1000LM/10W 20L - 2000LM/20W 14L - 1400LM/15W 28L - 2800LM/30W	U - (120-277V)	30K - (3000K) 40K - (4000K) Custom	NC - (Narrow degree with clear lens) GC - (General degree with clear lens)	C1 - (on/off with 0-10V dimmable driver)	DG - (Dark Gray) SG - (Silver Gray) SW - (Sandy White) TR* - (Terracotta red) Custom

* = made to order

AVAILABLE FINISH: SHOWN IS DIRECT/INDIRECT

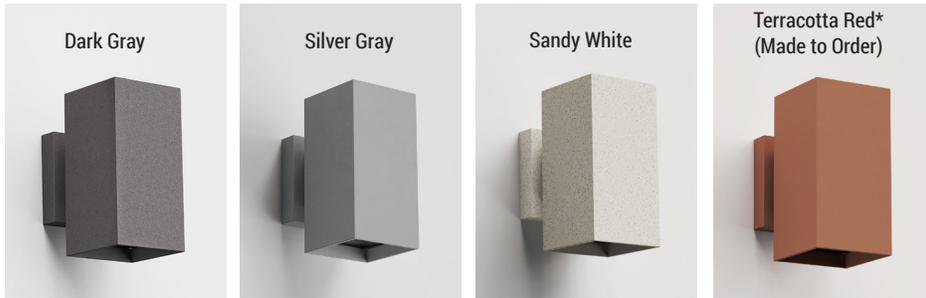

*AVAILABLE ACCESSORIES: (SOLD SEPARATELY)

*Accessories
SP-EM40-AC-C - 40W remote mount field install emergency backup inverter
SP-EM40-SW - Remote test switch for SP-EM40-AC-C
JB-4-RD-WH/BD/BL/AL - Commercial Electrical Waterproof Box

SPECIFICATIONS

CONSTRUCTION

Housing constructed with proprietary natural composite mix material of concrete and stones with stainless steel lens cover and screw.

FINISH

Natural concrete and stone mix finish available in dark gray and silver gray finish, highly resistant to rust and decay caused by environmental factors.

OPTICS/DIFFUSER

Embossed aluminum reflector with harden glass lens, available in general 36 degree and narrow 24 degree beam angle, direct and omni directional.

ELECTRICAL

Long life COB LED package, 90 CRI standard, SDCM 5-step binning, Outdoor rated LED driver with input voltages of 120-277Vac with 0-10V dimming, dim to 1% to off.

MOUNTING

Wall Mount

VALIDATIONS

ETL wet location Listed, IP54 and IK06 rated, Dark Sky compliant (Direct only) FCC, RoHS