

DFU

Vandal Resistant Utility Luminaire

MODEL NO.	TYPE	PROJECT/DATE
-----------	------	--------------


KEY FEATURES

- Compact and slim profile IP65/IK10 rated cast-aluminum housing
- Adjustable arm can be used for wall or ceiling mount
- Optional new construction J-box with side knockout for power leads
- Field CCT and lumen changeable

TECHNICAL SUMMARY

WATTAGE:	25/20/15W changeable
LUMEN/EFFICACY	3000/2400/1800LM* / 125 LM/W
INPUT VOLTAGE	120-277Vac
AVAILABLE CCT/CRI	3000/4000/5000K CCT changeable / 80+ CRI
CONTROL	0-10V dimming (10% to off)
VALIDATIONS	cUL & UL Wet location listed, IP65, IK10
LIFETIME	L90>50,000 hours, 5 year warranty
SURGE PROTECTION	10Kv SPU included
OPERATION TEMP.	-40°F - 104°F
FINISH	Aluminum

*Delivered lumen may vary, refer to photometric for full performance data

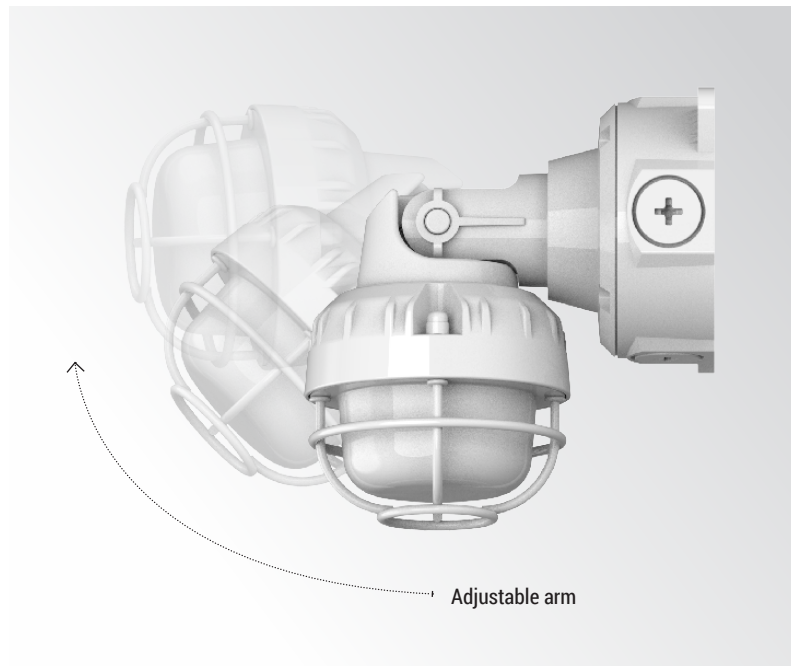



Adjustable arm



Adjustable for ceiling mount



DIMENSIONS

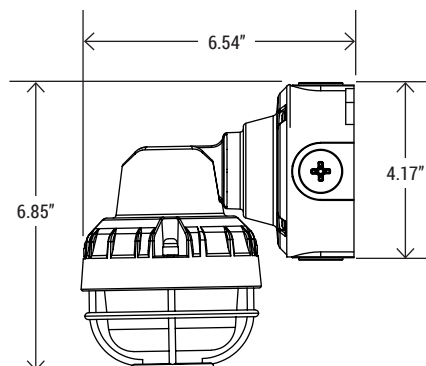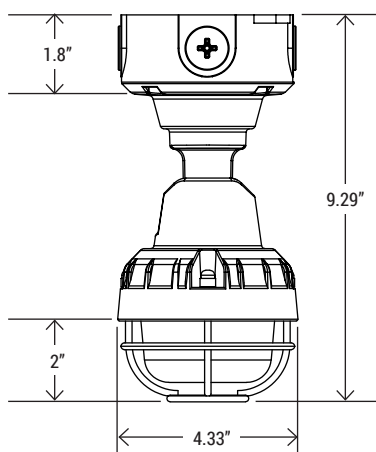


MODEL NO.	TYPE	PROJECT/DATE
-----------	------	--------------

ORDERING INFORMATION


*Additional cost and/or lead time on customized fixtures may apply.

	-		-		-		-	
Series	Lumen Package	Voltage	CCT	Control	Mounting			
DFU Vandal Resistant Utility Luminaire	30LC - (3000/2400/1800LM)	U - (120-277V)	CC - (30K/40K/50K)	C1 - (on/off with 0-10V dimming driver)	NC - (New construction with J-box mount) RT - (Retrofit to existing J-box)			

MOUNTING OPTIONS

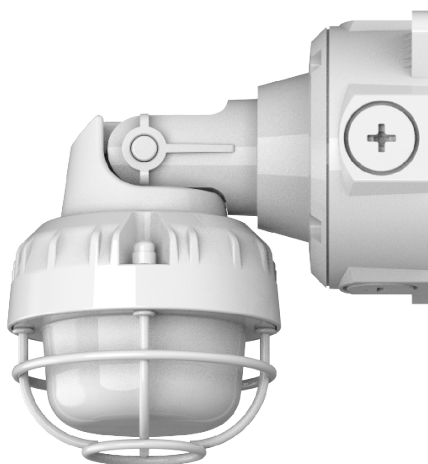

NC
New construction with J-box mount

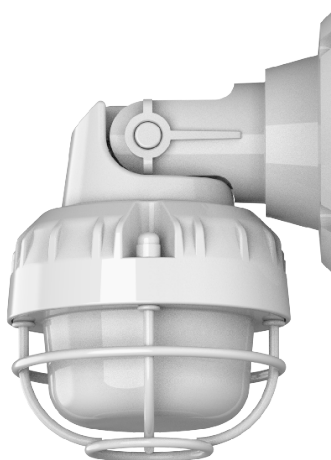

RT
Retrofit to existing J-box

SPECIFICATIONS

CONSTRUCTION

Cast-aluminum housing with stainless steel tamper-proof screws.

FINISH

Powder coated in aluminum finish.

OPTICS

High impact and UV resist polycarbonate frosted lens with aluminum wire guard.

ELECTRICAL

Long life LED system, 30/40/50K CCT and lumen output changeable with a Class 2, constant current 0-10V dimmable, 120V-277Vac, 50-60 HZ driver.

VALIDATIONS

cUL & UL wet location Listed, IP65 rated, IK10, FCC, RoHS

MOUNTING

New construction or retrofit surface mount with or with J-box and adjustable arm.