


| MODEL NO. | TYPE | PROJECT/DATE |
|-----------|------|--------------|
|-----------|------|--------------|

KEY FEATURES

- Low-profile architectural semi-cut off regular and emergency illumination
- Cold-weather kit included for emergency illumination extreme cold environment
- 3 CCT field changeable with standard integrated photocontrol
- UL 924 listed, NFPA and ADA compliant with self-diagnostic function

TECHNICAL SUMMARY


| | |
|-------------------|-----------------------------------------------------------------------------------------------------------------|
| WATTAGE: | up to 16W |
| LUMEN/EFFICACY* | up to 1250LM @ 4000K / 100LM/W AC mode, 400LM @ 4000K emergency mode |
| INPUT VOLTAGE | 120-277Vac |
| AVAILABLE CCT/CRI | 30K/40K/50K CCT changeable / 80+ CRI |
| CONTROL | On/off photocell sensor |
| VALIDATIONS | UL & cUL wet location and UL 924 listed, IP65 rated, FCC, NFPA 70 and NFPA 101 requirement, ADA compliant, RoHS |
| LIFETIME | L70>60,000 hours, 3 year warranty |
| OPERATION TEMP. | -4°F ~ 104°F |
| FINISH | Dark Bronze, Matte Black, Matte White, Silver Gray |

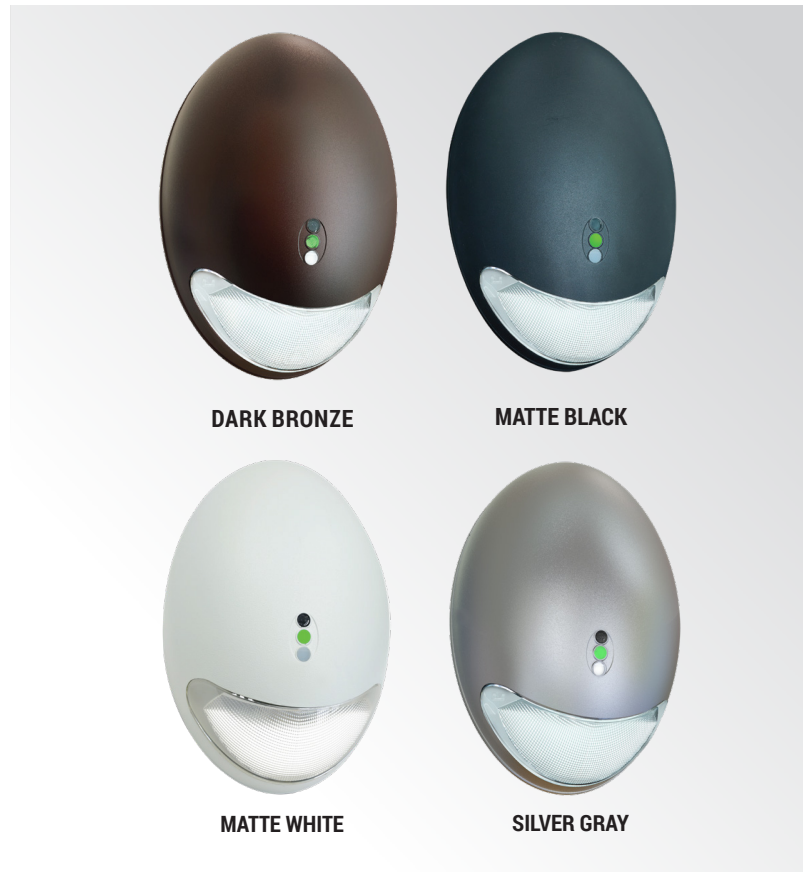

*Delivered lumen may vary, refer to photometric for full performance data



DIMENSIONS

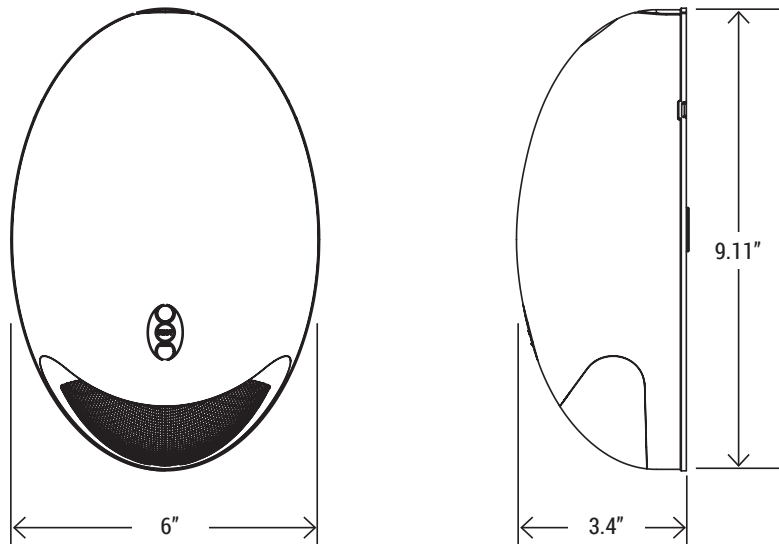

Weight: 2.5 lbs


| | | |
|-----------|------|--------------|
| MODEL NO. | TYPE | PROJECT/DATE |
|-----------|------|--------------|

ORDERING INFORMATION

*Additional cost and/or lead time on customized fixtures may apply.

| <input type="text"/> | - | <input type="text"/> | - | <input type="text"/> | - | <input type="text"/> | - | <input type="text"/> | - | <input type="text"/> |
|----------------------|-----------------------|-------------------------|------------------------------------------|---------------------------------------------|-------------------------------------------------------------------------------------------------------------------|----------------------|---|----------------------|---|----------------------|
| Series | Lumen Package | Input Voltage | CCT | Control | Finish | | | | | |
| EWC | 12L - (1250LM) | U - (120-277Vac) | CC - (30/40/50K Color Changeable) | COP - (On/Off with Button Photocell) | BK - (Matte Black) DB - (Dark Bronze) WH - (Matte White) SG - (Silver Gray)* | | | | | |
| | | | | | *Made to order | | | | | |

FINISH REFERENCE

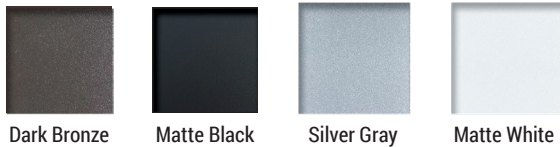

SPECIFICATIONS

CONSTRUCTION

Cast aluminum main body with separable backplate for installation and maintenance.

FINISH

Exterior parts are protected by a rust and corrosion proof zinc-infused polyester powder coating.

OPTICS/DIFFUSER

UV resistant frosted polycarbonate lens.

ELECTRICAL

High-efficacy LEDs with minimum 80 CRI. 120-277Vac universal input with factory installed photocell. LiFeP04 battery provides minimum 90-minute emergency operation. LED indicator light & test button with self-diagnostics function. CCT changeable.

VALIDATIONS

UL & cUL wet location and UL 924 listed, IP65 rated, FCC, meets or exceeds NFPA 70 and NFPA 101 requirement, ADA compliant, RoHS

MOUNTING

Wall mount