

PEAK SR

Medium and Large Full Cut-off Wall Luminaire

MODEL NO.	TYPE	PROJECT/DATE
-----------	------	--------------

KEY FEATURES

- Modern rectilinear design
- Multiple distributions option available for different applications
- Standard lumen and CCT changeable
- Zero uplight dark sky compliant


TECHNICAL SUMMARY

SIZE	Medium, Large
WATTAGE	M:70W/56W/45W/28W; 120W/96W/72W/48W; L:165W/132W/99W/66W
LUMEN*/EFFICACY	M:11000LM/8800LM/7100LM/4400LM; 17000LM/15000LM/11000LM/8100LM L: 22000LM/19000LM/15000LM/10000LM up to 150LM/W
INPUT VOLTAGE	120-277Vac, 277-480Vac optional
AVAILABLE CCT/CRI	30/40/50K changeable; CRI >70 *WFPF-M-170LC only has 40K/50K CC option
CONTROL	On/off, On/off with button photocell, 0-10V Bi-level micro-wave motion sensor, 0-10V Bi-level PIR occupancy sensor
VALIDATIONS	UL & cUL wet location listed, IP65, IK08(lens), IK10(housing) FCC, RoHS, DLC Premium
LIFETIME	L90> 50,000 hours, 5 year warranty
DISTRIBUTION	Type III, Type IV, Type General
OPERATION TEMP.	-40°F ~ 113°F (w/o EM) / 32°F ~ 113°F (with EM1, EM15) / -4°F ~ 113°F (with EMC8)
FINISH	Dark Bronze, Black, White


*Delivered lumen may vary, refer to photometric for full performance data




PEAK-L

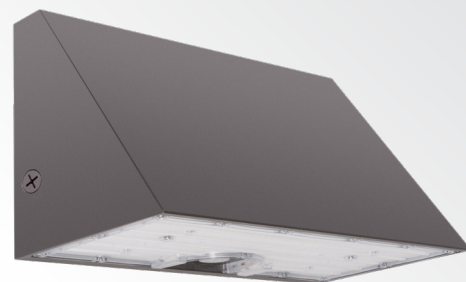

PEAK-M



Black





Dark Bronze



White

DIMENSIONS

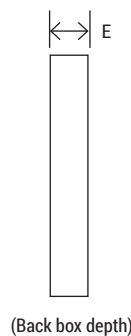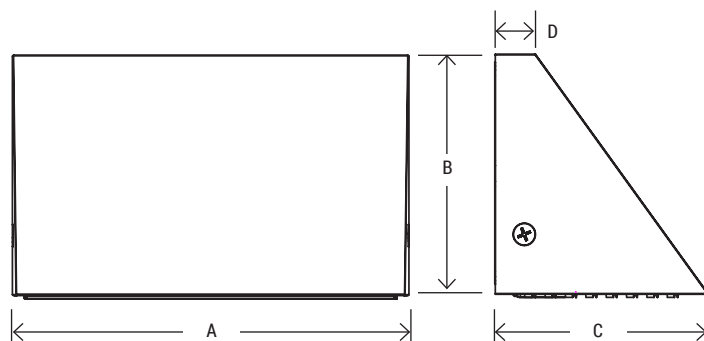

(Back box depth)

Model No.	PEAK-M	PEAK-L
A	12.4"	15"
B	7.4"	9"
C	7"	8"
D	1.5"	1.5"
E	1.77"	1.77"
Weight	8.14 lbs	11.5 lbs
W/ back box	9.14 lbs	13 lbs

PEAK SR


Medium and Large Full Cut-off Wall Luminaire

MODEL NO.	TYPE	PROJECT/DATE
-----------	------	--------------

ORDERING INFORMATION

*Additional cost and/or lead time on customized fixtures may apply.

Series	Size	Lumen Package	Input Voltage	CCT	Distribution	Control	Finish	EM Option*
WPFP	M - (Medium)	71L - (7100LM) 110LC - (11000/8800/7100/4400LM) 170LC - (17000/15000/11000/8100LM)	U - (120-277V) H - (277V-480V)**	CC - (30K/40K/50K Color Changeable) <i>(170LC is 40K/50K CCT changeable)</i>	T3 - (Type III)* T4 - (Type IV) TG - (Type General)*	C0 - (On/off) C0P - (On/off with button photocell) CMM - (0-10V Bi-level microwave motion sensor)* CMP - (0-10V Bi-level PIR occupancy sensor)* CMB - (0-10V Bi-level motion sensor with button photocell)* CPB - (0-10V Bi-level PIR sensor with button photocell)* <i>**C0P, CMM, CMP, CPB & CMB option not available for High Voltage (H)</i>	DB - (Dark Bronze) B - (Black) W - (White)	EM1 - (8W Factory Installed Integrated EM) EM15 - (15W Factory Installed Integrated EM) EMC8 - (8W Factory Installed Cold Rated Integrated EM) EMC15 - (15W Factory Installed Cold Rated Integrated EM) <i>**EM not available for High Voltage (H)</i>
	L - (Large)	220LC (22000/19000/15000/10000LM)						

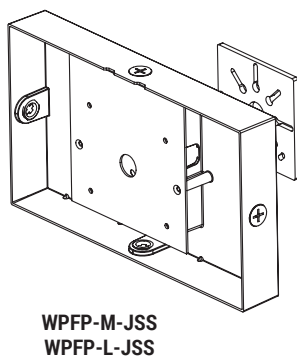

*AVAILABLE ACCESSORIES: (Sold separately)

*Accessories

- CMM-ANT-5-4T** - (Bi-level motion sensor)
- CMP-ANT-6-4T** - (Bi-level PIR motion sensor)
- RC-100** - (Remote Control)
- WPFP-M-JSS-[DB/B/W]** - (WPFP-M backbox with 4 direction conduit knockouts)
- WPFP-L-JSS-[DB/B/W]** - (WPFP-L backbox with 4 direction conduit knockouts)

SPECIFICATIONS

CONSTRUCTION

The single-piece cast aluminum housing optimized thermal dissipation from the LED engine and promote long life. The die-cast door frame is fully gasketed with a silicone gasket to keep out moisture and dust, providing an IP65 rating.

FINISH

Exterior parts are protected by a zinc-infused Super Durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering.

OPTICS/DIFFUSER

UV stabilized polycarbonate optic engineered for superior application efficiency which maximizes the light in the areas where it is most needed. Type III*, Type IV, General* distribution available.

ELECTRICAL

Light engine consists of high-efficacy LEDs mounted to aluminum boards to maximize heat dissipation, reported L90 >50,000 hours. A Class 2, constant current 0-10V dimmable driver with 120V-277Vac, 50-60 HZ. Ships with field enable/disable button photocell.

MOUNTING

Wall Mount.

VALIDATIONS

UL & cUL wet location listed, IP65, IK08 (lens), IK10 (housing)FCC, RoHS, Dark Sky Compliant, DLC Premium

PEAK SR

Medium and Large Full Cut-off Wall Luminaire

MODEL NO.	TYPE	PROJECT/DATE
-----------	------	--------------



DLC Premium

Visit <https://www.designlights.org/qpl> to confirm qualification.)

SPLITZER MODEL NUMBER	DLC PRODUCT ID
WPFP-71L-U-40K-T4-[C1,C2,C3,C4]-[DB,WH,BL,SL]	S-78TLGJ
WPFP-71L-U-50K-T3-[C1,C2,C3,C4]-[DB,WH,BL,SL]	S-55SD59
WPFP-71L-U-50K-T4-[C1,C2,C3,C4]-[DB,WH,BL,SL]	S-4DNXBQ
WPFP-71L-U-40K-T3-[C1,C2,C3,C4]-[DB,WH,BL,SL]	S-HG81JR
WPFP-110LC-U-CC-T3-[C1,C2,C3,C4]-[DB,WH,BL,SL]	S-F7QN0F
WPFP-110LC-U-CC-TG-[C1,C2,C3,C4]-[DB,WH,BL,SL]	S-RJFMM5
WPFP-110LC-U-CC-T4-[C1,C2,C3,C4]-[DB,WH,BL,SL]	S-JV9GB3
WPFP-170LC-U-CC-TG-[C1,C2,C3,C4]-[DB,WH,BL,SL]	S-69PLQF
WPFP-170LC-U-CC-T4-[C1,C2,C3,C4]-[DB,WH,BL,SL]	S-L0JS5Q
WPFP-170LC-U-CC-T3-[C1,C2,C3,C4]-[DB,WH,BL,SL]	S-BQ563R