RAIL 2R


Architectural Linear Luminaire

Spitzer LIGHTING

MODEL NO.	TYPE	PROJECT/DATE

KEY FEATURES

- Architectural recessed extruded aluminum linear luminaire
- Continuous run or custom pattern with optional joiners
- Available with louver, micro reflector, deep regressed and wall washer lens options
- Field changeable CCT and Lumen output

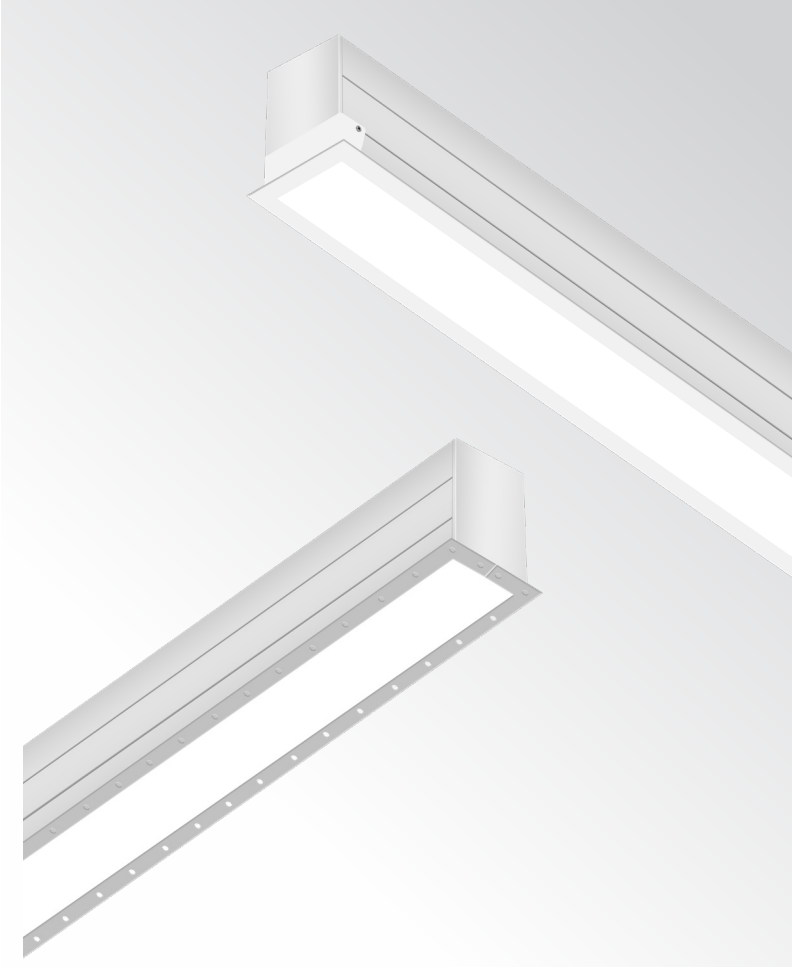

TECHNICAL SUMMARY

SIZE	2, 3, 4, 8ft
WATTAGE	2': 20/15/10W 3': 30/20/15W 4': 40/30/20W 8': 80/60/40W
LUMEN/EFFICACY	2': 2000/1500/1000LM 3': 3000/2500/1500LM 4': 4000/3000/2000LM 8': 8000/6000/4000LM, 100-110LM/W
INPUT VOLTAGE	120-277Vac
AVAILABLE CCT/CRI	3000K/3500K/4000K Color Changeable, 80 CRI standard
CONTROL	0-10V dim to 10%
VALIDATIONS	UL & cUL Damp Location Listed, FCC, RoHS Compliant
LIFETIME/WARRANTY	L70 > 70,000 hours, 5 year warranty
LENS TYPE	Standard: General single hard diffuser or continous soft diffuser, Optional: Louver, micro reflector, deep regressed and wall washer lens
OPERATION TEMP	-13°F ~ 122°F regular/ EM 32°F ~122°F
FINISH	Matte White


**Delivered lumen may vary, refer to photometric for full performance data*

c UL us LISTED

Suitable for DAMP LOCATION

CCT CHANGEABLE

DIMENSIONS



Model No.	A	B	C	Weight
RL2R-2	23.7"	3.5"	2.34"	4 lbs
RL2R-3	35.7"	3.5"	2.34"	6 lbs
RL2R-4	47.7"	3.5"	2.34"	7 lbs
RL2R-8	95.25"	3.5"	2.34"	14 lbs

RAIL 2R

Architectural Linear Luminaire

Spitzer LIGHTING


MODEL NO.	TYPE	PROJECT/DATE

ORDERING INFORMATION

Series	Size	Lumen Package	Input Voltage	CCT	Lens & Diffuser Type	Control	Finish	Mounting	EM Option*
RL2R	**2 -** (2ft)	**20LC -** (2000/1500/1000LM)	**U -** 120-277Vac	**CC -** 30/35/40K Changable	**DF -** (Diffuser) **LU -** (Louver)* **MR -** (Micro Reflector)* **DR -** (Deep regressed)* **WW -** (Wall Washer)*	**C10 -** (0-10V 10% Dimming)	**WH -** (Matte White)	**RF1 -** (Flange trim by bracket in dry wall ceiling) **RF2 -** (Flange trim by pendant stem (by other) in dry wall ceiling) **RF3 -** (Flange trim lay on T-grid ceiling) **RT1 -** (Trimless for dry wall ceiling)** **RH -** (Flange trim by T-grid hooks to secure in T-grid ceiling)	**EM1 -** (8W Factory Installed Integrated EM) *IntegratedEMoptions are available for 4 ft. and 8 ft. fixtures only.* *All fixture lengths are compatible with EME25 emergency inverters.*
	3 - (3ft)	**30LC -** (3000/2500/1500LM)							
	4 - (4ft)	**40LC -** (4000/3000/2000LM)							
	8 - (8ft)*	**80LC -** (8000/6000/4000LM)							

*Additional cost and/or lead time on customized fixtures may apply.
**Minimum 1/2" up to 1" thickness drywall

ACCESSORIES*



RL2R-XX-L
Flanged Rail 2 Recessed illuminated L-Corner junction



RL2R-STR
Continuous Junction



RL2R-CWJ
Ceiling to Wall Joiner

*Accessories (Sold separately)

RL2R-XX-L - Flanged Rail 2 Recessed illuminated L-Corner junction (DF is stocked LU/MR/DR/WW MTO)
RL2R2-STR - Continuous Junction
RL2R-CWJ - Ceiling to Wall Joiner
EME25 - 25W field install inverter for 2'/4'/8' fixtures and up to 20' continuous run
RL2-40F-LENS - Flexible, cut able roll lense, 40ft roll

SPECIFICATIONS

CONSTRUCTION
Extruded aluminum housing with casting end-cap.

FINISH
Matte White

OPTICS
Available in louver, deep regressed, diffuser, micro reflector and frosted flush options

MOUNTING
Recessed

ELECTRICAL
Class 2 high efficiency LED driver, with a standard 0-10V driver which continuous dims to 10% that works with many types of controls. Standard electronic drivers are UL recognized and available for 120-277V.
*Max continous run (daisy chained) per a single 120Vac AC power input is 40FT
*Max continous run (daisy chained) per a single 277Vac AC power input is 100FT

VALIDATIONS
UL & cUL Damp Location Listed, FCC, RoHS Compliant