

SKY BRIDGE VERTICAL

Omnidirectional Vertical-lit Linear Luminaire


MODEL NO.	TYPE	PROJECT/DATE
-----------	------	--------------

KEY FEATURES

- Vertical-lit LED engine provides direct and indirect uniformed illumination
- Available in 4 and 6ft and can be internally wired for continuous run up to 80ft
- Field changeable to 3000, 3500, and 4000K

TECHNICAL SUMMARY

SIZE:	4FT, 6FT
WATTAGE:	40W (4ft); 60W (6ft)
LUMEN / EFFICACY*	4FT: 4400LM, 6FT: 6600LM, 110LM/W
INPUT VOLTAGE	120-277Vac
AVAILABLE CCT & CRI	30K/35K/40K changeable / CRI >80
CONTROL	0-10V dim to 10%
VALIDATIONS	cUL & UL damp location listed, FCC, RoHS compliant
LIFETIME	L90>50,000 hours, 5 year warranty
OPERATION TEMP.	-32°F ~ 104°F
FINISH	White, Black


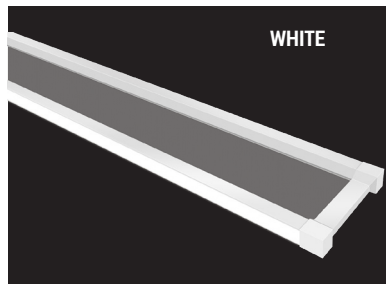


*Delivered lumen may vary, refer to photometric for full performance data




DIMENSIONS

4 FT
(8 lbs)

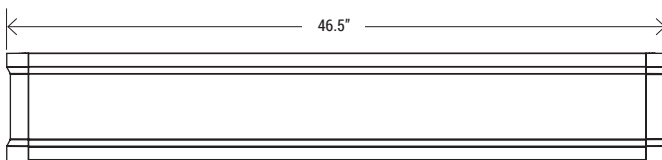

6 FT
(11 lbs)

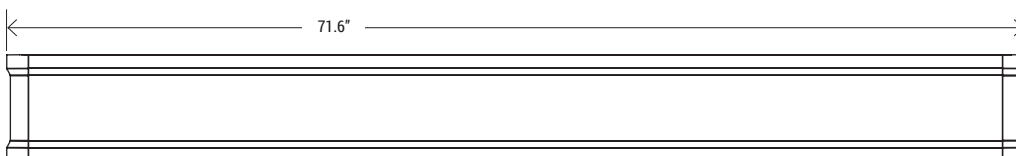

SKY BRIDGE VERTICAL

Omnidirectional Vertical-lit Linear Luminaire

MODEL NO.	TYPE	PROJECT/DATE
-----------	------	--------------

ORDERING INFORMATION

*Additional cost and/or lead time on customized fixtures may apply.

<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>
Series	Size	Lumen Package	Input Voltage	CCT	Control	Finish	Mounting					
SKV	4 - (4')	40L - (4400LM)	U - 120-277Vac	CC - (30K/35K/40K Color Changeable)	C1 - (0-10V 10% Dimming)	BK - (Matte Black) WH - (Matte White)	P1R - (Mount to Recessed J-Box Round with Round Canopy) P2R - (Mount to Flat T-Grid Drop Ceiling with Round Canopy) P1S - (Mount to Recessed J-Box Round with Square Canopy) P2S - (Mount to Flat T-Grid Drop Ceiling with Square Canopy)					
	6 - (6')	60L - (6600LM)										
<small>*P1R includes SKV-PMRC-WH/BK, aircraft cables and ac cable *P2R includes SKV-PMRC-WH/BK, SKV-DM16, SKV-DM95, aircraft cables and AC cable *P1S includes SKV-PMSC-WH/BK, aircraft cables and ac cable *P2S includes SKV-PMSC-WH/BK, SKV-DM16, SKV-DM95, aircraft cables and AC cable</small>												

CANOPY SHAPE



Round Canopy Set

Square Canopy Set

*Accessories (Sold separately)

- SKV-CORD-12F-WH/BK** - White or Black adjustable 12' aircraft cable (2) and 12' 18/5 AC cord white hanging kit
- SKV-PMRC-WH/BK** - White or Black round shape canopy set (1 x power feed 4", 1 x non-power feed 2" canopy)
- SKV-PMSC-WH/BK** - White or Black square shape canopy set (1 x power feed 4", 1 x non-power feed 2" canopy)
- SKV-DM16** - 15/16 T-grid ceiling clips set
- SKV-DM95** - 9/16 T-grid ceiling clips set
- EME16** - 16W field install inverter

SPECIFICATIONS

CONSTRUCTION

Extruded aluminum housing with casting aluminum end-cap, housing can be field modified for continuous run.

FINISH

Polyester powder coated in white and black finish.

OPTICS/DIFFUSER

Injection molded vertical anidolic PMMA light guide panel provides wide and visual comfortable illumination.

MOUNTING

Pendant via 4ft adjustable aircraft cables and power cord set.

ELECTRICAL

30/35/40K field changeable LED engine with 100-277Vac constant current driver with 0-10V dimming. L90 > 50,000 hours.

VALIDATIONS

cUL & UL Damp location listed, FCC compliant, RoHS compliant