

PENDANT SERIES

Dash Slim Pendant

Type:

Fixture:

TECHNICAL DATA

PRODUCT	SLLF	
SIZE	40"	60"
WATTAGE	30W	45W
LUMENS	1800 lm	2800 lm
EFFICACY	60 LM/W	
CCT	3000K, 3500K, 4000K	
VOLTAGE	120V-277V, 60HZ	
CRI	>80 Ra	
LIFETIME (L70)	>50,000 HRS	
DIMMING	0-10V	
LIGHT DISTRIBUTION	25% uplight, 75% downlight	
POWER FACTOR	>0.9	
THD	<20%	
WORKING TEMP.	-4°F ~ 104°F	

DESCRIPTION

Our Dash Slim Pendant is beautiful, modern, stylish and super slim pendant is part of our Dash series. The Slim Pendant has downlight and special uplight feature.

INTENDED USE

Our pendant series is ideal for illuminating conference rooms, hotel lobbies, offices, retail stores and reception areas.



Black Finish



Woodgrain Finish



White Finish



ORDERING INFORMATION

	-		-		-		-	
Series	Size	Lumen Package	CCT	Finish				
SLLF - (Dash Slim Pendant)	L100 - (40")	18L - (1800 lm/30W)	30K - (3000K) 35K - (3500K) 40K - (4000K)	BK - (Black) WH - (White) WG - (Woodgrain) RAL - (Custom Color)*				
	L150 - (60")	28L - (2800 lm/45W)						

*Additional cost and/or lead time on customized fixtures may apply.

Dash Slim Pendant

Type:

Fixture:

CONSTRUCTION

One-piece die-casted steel housing.

FINISH

Powder-coated finish. Black, white, woodgrain, or RAL code.

OPTICS


0.3" width acrylic cosmetic diffuser secured to the housing to ensure uniform illumination.

ELECTRICAL

Class 2, constant current, 120V-277V, 50-60 Hz. 0-10V Dimming.
L70>50,000 hours.


LISTINGS

ETL certified. Damp Location.

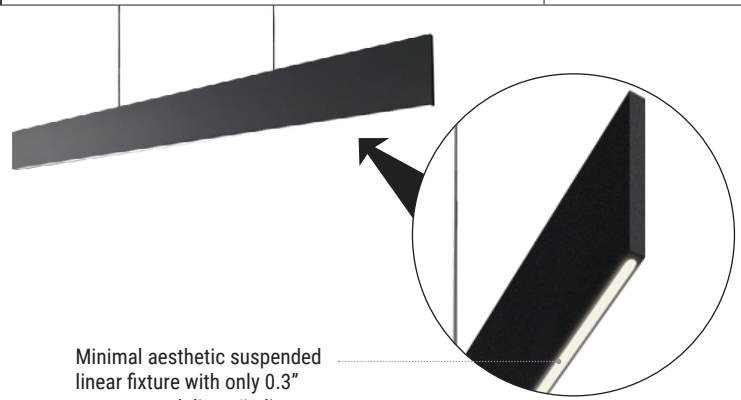


Minimal aesthetic suspended linear fixture with only 0.3" aperture and direct/indirect distributions that achieves the ideal illumination in any interior space.

DIMENSION

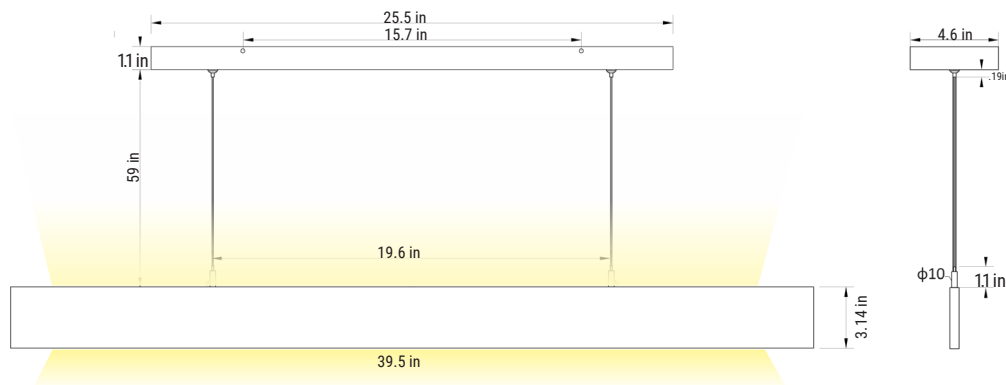

SLLF-L100

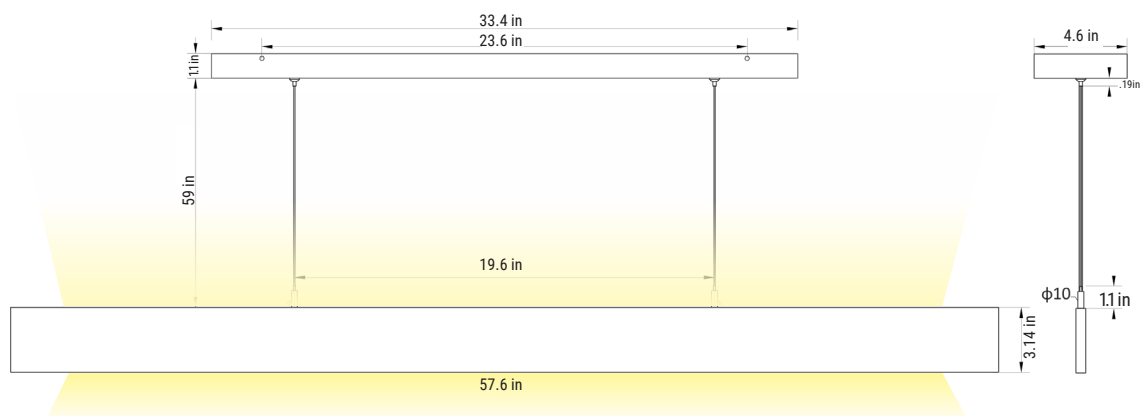

SLLF-L150