

TRAVERSE

Direct/Indirect Illumination Troffer

MODEL NO.	TYPE	PROJECT/DATE
-----------	------	--------------


KEY FEATURES

- Edge-lit direct/indirect low-glare visual comforting illumination
- Standard Lumen output and CCT changeable


TECHNICAL SUMMARY

SIZE:	1'x2', 1'x4', 2'x2', 2'x4'
OUTPUT WATTAGE:	1'x2': 20W/15W/10W changeable 1'x4': 40W/30W/20W changeable 2'x2': 40W/30W/20W changeable 2'x4': 50W/40W/30W changeable
LUMEN/EFFICACY*	1'x2': 2400/1800/1200LM changeable, >120 lm/W 1'x4': 4800/3600/2400LM changeable, >120 lm/W 2'x2': 4800/3600/2400LM changeable, >120 lm/W 2'x4': 6000/4800/3600LM changeable, >120 lm/W
INPUT VOLTAGE	120-277Vac
AVAILABLE CCT/CRI	30K/35K/40K CCT changeable, 1'x2': 80CRI standard 1'x4', 2'x2', 2'x4': 90CRI standard
CONTROL	0-10V dimming, dim to 10%
VALIDATIONS	UL listed & cUL damp location listed, IC rated, FCC, DLC 6.0 listed
LIFETIME	L80>50,000 hours, 5 year warranty
OPERATION TEMP.	-4°F ~ 104°F / 32°F ~ 104°F (w/ EM)
FINISH	Matte White

*Delivered lumen may vary, refer to photometric for full performance data

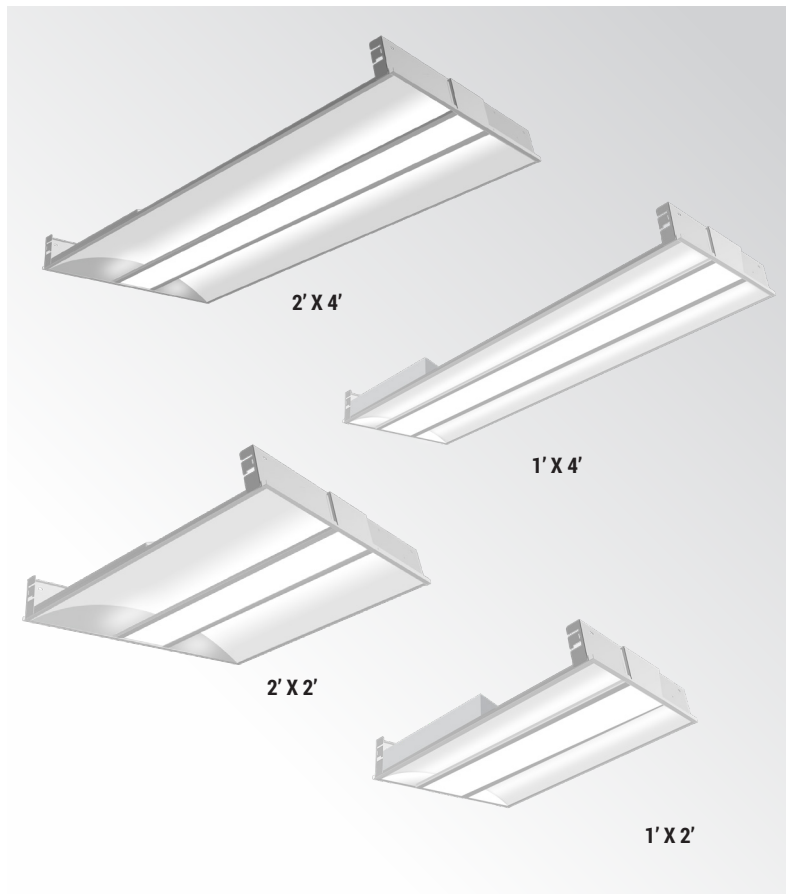

DIMENSIONS

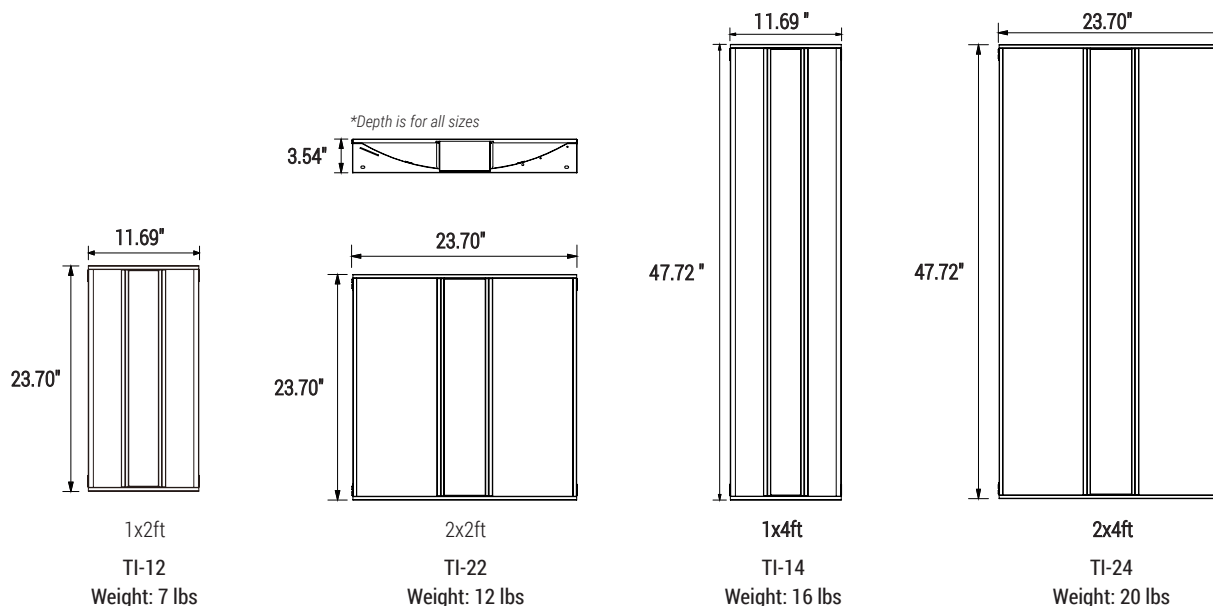

TRAVERSE

Direct/Indirect Illumination Troffer

MODEL NO.	TYPE	PROJECT/DATE
-----------	------	--------------

ORDERING INFORMATION

*Additional cost and/or lead time on customized fixtures may apply.

	-		-		-		-		-	
--	---	--	---	--	---	--	---	--	---	--

Series	Size	Lumen Package	Input Voltage	CCT	Control	EM Option	Other
TI	12 - (1'x2')	24LC - (2400LM/1800LM/1200LM)	U - (120-277Vac)	CC - (30/35/40K Color Changeable)	C10 - (0-10V 10% Dimming)	EM1 - (8W Factory Installed Integrated EM)*	AM - (Antimicrobial Finish)* CP - (Chicago Plenum)*
	14 - (1'x4')	48LC - (4800LM/3600LM/2400LM)					
	22 - (2'x2')	48LC - (4800LM/3600LM/2400LM)					
	24 - (2'x4')	60LC - (6000LM/4800LM/3600LM)					

*AVAILABLE ACCESSORIES: (SOLD SEPARATELY)



**BP-RMK-1X2/BP-RMK-1x4/
BP-RMK-2x2/BP-RMK-2x4**
Recessed dry wall flange
mount kit



**TT-CMKW-1x4/TT-CMKW-2x2/
TT-CMKW-2x4**
Surface mount kit

*Accessories

BP-RMK-1X2/BP-RMK-1x4/BP-RMK-2x2/BP-RMK-2x4 - Recessed dry wall flange mount kit

TT-CMKW-1x4/TT-CMKW-2x2/TT-CMKW-2x4 - Surface mount kit

MCF-185-6F - Metal-clad flex whip, 18-gauge, 5 conductors Black/White/Green/Pink/Violet

MCF-186-6F - Metal-clad flex whip, 18-gauge, 6 conductors Black (Switch hot) / Black (24/7 hot) / White/Green/Pink/Violet

SPECIFICATIONS

CONSTRUCTION

Shallow rugged cold-rolled steel frame with extruded aluminum center heatsink.

FINISH

Polyester coated finish in powder coating after fabrication with embossed facets, Antimicrobial finish option available

ELECTRICAL

Long-life LEDs standard 30K/35K/40K field changeable, 120-277Vac driver with adjustable output lumen and standard 0-10V 10% dimming

MOUNTING

Recessed mount

VALIDATIONS

UL & cUL damp location listed, IC rated, FCC, DLC 6.0 listed



(Not all product variations listed on this page are DLC qualified. Visit <https://www.designlights.org/qpl> to confirm qualification.)

SPITZER MODEL NUMBER	DLC PRODUCT ID
TI-22-LC-U-CC-C1	S-5UXG4W
TI-24-LC-U-CC-C1	S-0LH1J4