

HOSPITALITY SERIES

Spitzer
LIGHTING

INDOOR

Vanity Sconce Luminaire

Type:

Fixture:



TECHNICAL DATA


PRODUCT	VANS-18-15L	VANS-24-17L	VANS-36-21L	VANS-48-24L
SIZE	18"	24"	36"	48"
WATTAGE	20W	25W	30W	35W
LUMENS	1500LM	1750LM	2100LM	2450LM
EFFICACY	75 LM/W	70 LM/W	70 LM/W	70LM/W
CC	Color Changeable - 3000K/4000K/5000K			
VOLTAGE	120V			
DIMMING	TRIAC			
CRI	>80			
LENS	ACRYLIC			
POWER FACTOR	>0.9			
WORKING TEMP.	-4°F TO 122°F			

ORDERING INFORMATION

DIMENSIONS



Series	Size	Lumen Package	CC	Finish
VANS - (Vanity Sconce Luminaire)	18 - (18") 24 - (24") 36 - (36") 48 - (48")*	15L - (1500 lm, 20W) 17L - (1750 lm, 25W) 21L - (2100 lm, 30W) 24L - (2450 lm, 35W)*	CC - (Color Changeable 3000K,4000K, 5000K)	NK - (Brushed Nickel)

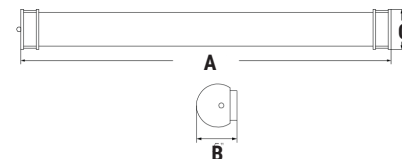

PRODUCT	A	B	C
VANS-18-15L	19 1/8"	5 7/8"	4"
VANS-24-17L	25 5/8"	5 7/8"	4"
VANS-36-21L	37 1/8"	5 7/8"	4"
VANS-48-24L	48 1/16"	5 7/8"	4"



DESCRIPTION

The Vanity Sconce Luminaire offers a modern and streamlined look for your living space. It's designed to be mounted horizontally or vertically for easy installation. With the power coated painted die-formed cold-rolled steel frame and high transmission white acrylic lens. This energy efficient product will illuminate your home for a very long period.

INTENDED USE

Our Hospitality Series is the perfect product to illuminate residential areas, hospitals, hotels, bathrooms, hallways, closets, and many more applications.

CONSTRUCTION

Unit includes steel frame, LED array, heat sink, lens, foam gasket, baffle trim ring, safety cable with hook and junction box. High transmission white acrylic lens with satin nickel trim. Efficiency LED array, and diffuse for uniform illumination.

FINISH

Die-formed cold-rolled steel with powder coated paint.

ELECTRICAL

Class 2, constant current, 120V, 50-60 HZ, 0.95Amp@100V. Triac dimming.

LISTINGS

ETL certified. Suitable for wet locations. 5 Year Warranty.