

QUAD

Square Decorative Wall Sconce

MODEL NO.	TYPE	PROJECT/DATE
-----------	------	--------------

KEY FEATURES

- Uniformed 90CRI full illumination with top covered option
- IP65 enclosure rated, IK10 impact rated, ADA compliant
- Standard three CCT field changeable


TECHNICAL SUMMARY

SIZE:	6" x 6"
WATTAGE:	8W
LUMEN EFFICACY	Up to 600LM, 90LM/W @ 5000K
INPUT VOLTAGE	120-277Vac
AVAILABLE CC	3000K/4000K/5000K changeable, CRI >90 standard
CONTROL	On/Off
VALIDATIONS	ETL & cETL wet location listed, IP65, IK10, ADA Compliant
LIFETIME	L70>50,000 hours, 5 year warranty
OPERATION TEMP.	-40F - 104F
FINISH	Matte Black, Matte White, Dark Bronze



*Delivered lumen may vary, refer to photometric for full performance data




DIMENSIONS

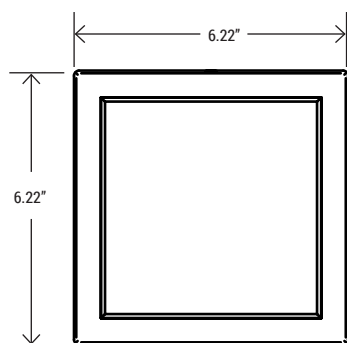

WSQ-F
2.5 lbs

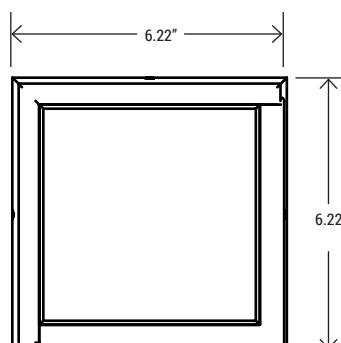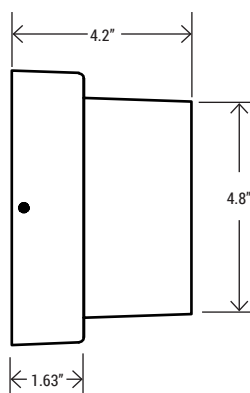

WSQ-H
2.5 lbs

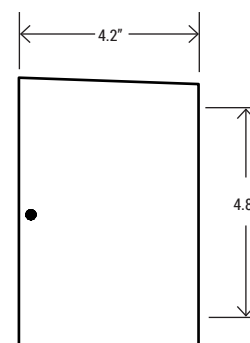

QUAD

Square Decorative Wall Sconce

MODEL NO.	TYPE	PROJECT/DATE
-----------	------	--------------

ORDERING INFORMATION

*Additional cost and/or lead time on customized fixtures may apply.

	-		-		-	
Series		Size		CCT		Finish
WSQ	F - (Full illumination 6"x6", 600 LM)		CC - 30K/40K/50K color changeable		BK - (Matte Black) DB - (Dark Bronze) WH - (Matte White)	
	H - (Top covered lit 6"x6", 400 LM)					

SPECIFICATIONS

CONSTRUCTION

Square single-piece cast aluminum housing with fully gasketed with a silicone gasket to keep out moisture and dust, providing an IP65 rating.

FINISH

Exterior parts are protected by a rust and corrosion proof zinc-infused polyester powder coating.

OPTICS/DIFFUSER

UV & impact proof Polycarbonate lens with frosted finish inside to create a uniformed illumination.

ELECTRICAL

Long-life LEDs standard 30K/40K/50K field selectable, 120-277Vac driver at 50/60Hz.

MOUNTING

Surface mount (wall or ceiling) directly to an industry standard 4" metal or plastic octagon junction box with 3-1/2" junction box screw-hole spacing. Luminaire provided with leads for direct wire connection in junction box.

VALIDATIONS

ETL & cETL wet location listed, IP65, IK10, ADA Compliant