

MODEL NO.	TYPE	PROJECT/DATE
-----------	------	--------------


KEY FEATURES

- Elegantly designed with visual-comfortable illumination performance
- Impact proof IK10 rated PC lens with symmetrical distribution
- Optional -20°C emergency battery backup driver

TECHNICAL SUMMARY

SIZE:	24" and 42" Overall height
WATTAGE:	20/16/12/8W
LUMEN/EFFICACY*	2000/1600/1200/800LM, 100 LM/W
INPUT VOLTAGE	120-277Vac
AVAILABLE CCT/CRI	30/40/50K changeable, 80+CRI, Custom
CONTROL	On/Off with 0-10V driver
VALIDATIONS	ETL & cETL wet location, IP65 and IK10 rated, RoHS, FCC compliant
LIFETIME	L70>100,000 hours, 5 year warranty
OPERATION TEMP.	-40°F ~ 122°F / -4°F ~ 122°F (with EM)
FINISH	Matte Black, Dark Bronze, Silver Gray, Matte White Premium finish: Pine Green, Corten Brown Premium Wood finishes: Walnut Wood (dark), Cherry Wood (brown), Oak Wood (light)

*Delivered lumen may vary, refer to photometric for full performance data

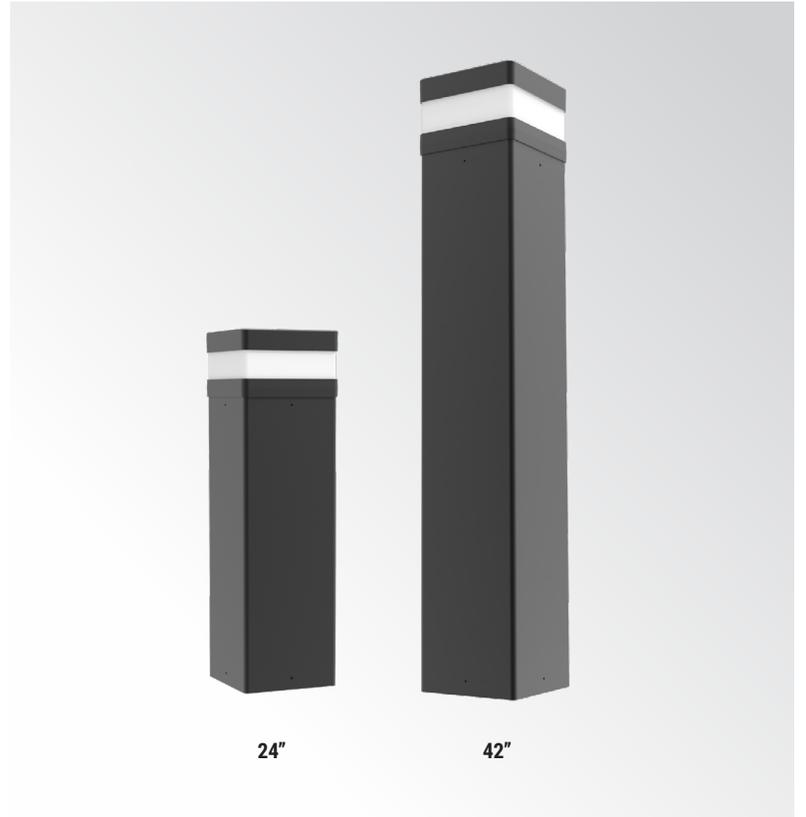

24"


42"




GFA
20amp GFCI with USB Type C



DIMENSIONS

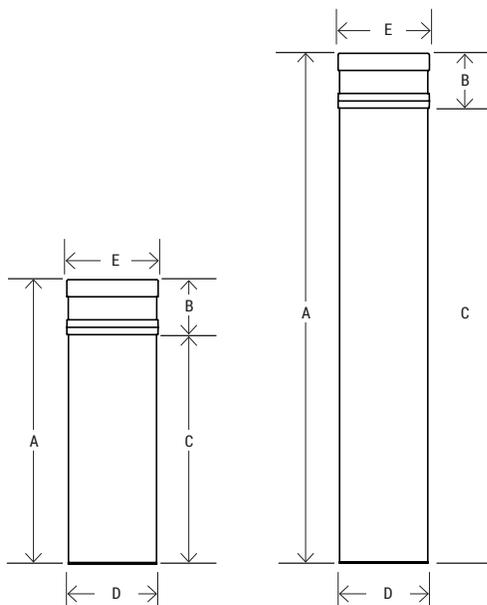

Model No.	A HEIGHT	B HEAD	C BODY	D DIAMETER	E TOP HEAD	WEIGHT
BSC-24	24"	4.4"	18.6"	6.7"	6.9"	16 lbs
BSC-42	42"	4.4"	36.6"	6.7"	6.9"	22 lbs

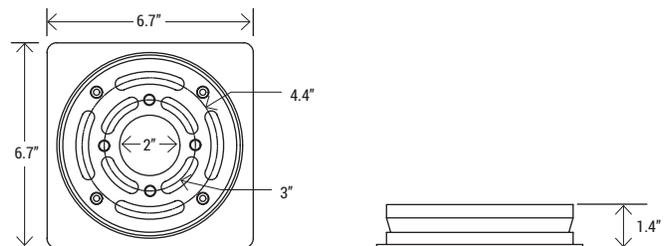


MODEL NO.	TYPE	PROJECT/DATE
-----------	------	--------------

ORDERING INFORMATION

*Additional cost and/or lead time on customized fixtures may apply.

[] - [] - [] - [] - [] - [] - [] - [] - [] - [] - []										
Series	Size	Lumen Package	Input Voltage	CCT	Light Distribution	Control	Finish	EM Option	Wood Body Finish	Misc & Other Options
BSC	24 - (24") 42 - (42")	20LC - (2000/1600/ 1200/ 800LM)	U - (120-277V) H** - (277V-480V)	CC - (30/40/50 Color Changeable)	T5 - (Type V)	C1 - (On/Off with 0-10V Driver No Dimming Wires) COP - (On/Off Button Integrat- ed Photocell)	BK - (Matte Black) DB - (Dark Bronze) SG - (Silver Gray) WH - (Matte White) PG - (Pine Green)* CB - (Corten Brown)*	EMC6 - (6W emergency option factory installed, cold-pack)	WW - (Walnut wood dark finish)* BW - (Cherry wood dark finish)* OW - (Oak- wood dark finish)*	GFA - (20amp GFCI with USB Type C) <i>*120Vac only, 42 inch OAH only, C1 only, Wet location rated</i>
			<i>**EM option not available</i>							

*Available accessories sold separately

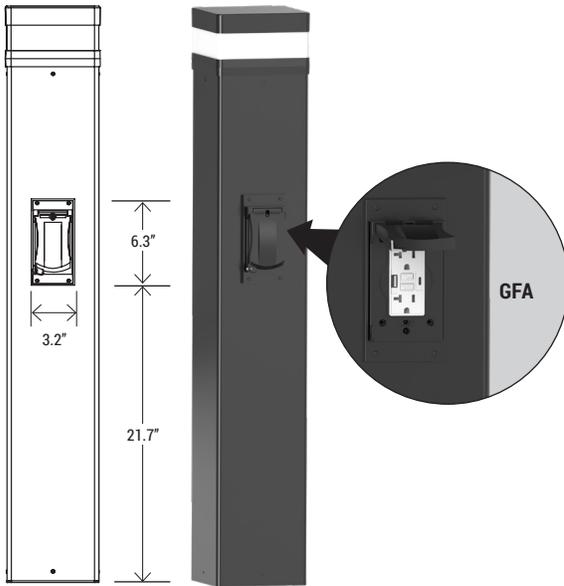

*Accessories
BR-ANC - Anchor base mounting kit



BR-ANC
Anchor base mounting kit
(Required for installation, pre-ship option available)

STANDARD COLOR



PREMIUM COLOR



SPECIFICATIONS

CONSTRUCTION

Low copper aluminum alloy die-cast top with extruded round aluminum body.

FINISH

Exterior parts are protected by a rust and corrosion proof zinc-infused polyester powder coating finish.

OPTICS/DIFFUSER

UV proof, IK10 rated PC lens with symmetrical distribution.

ELECTRICAL

Long life LED system, Outdoor rated LED driver that accommodates input voltages of 120-277Vac or 277-480Vac, at 50/60Hz with 0-10v dimming control function, CCT changeable.

MOUNTING

Anchor based mounting (anchors sold separately)

VALIDATIONS

ETL & cETL wet location, IP65 and IK10 rated, FCC compliant, RoHS compliant