

# CELIA CS

## Ceiling Mount Square Architectural Concrete Cylinder

MODEL NO.	TYPE	PROJECT/DATE
-----------	------	--------------

### KEY FEATURES

- Visual appealing concrete stone material housing creates an exceptional architectural texture perception
- Highly resistant to rust and decay caused by high humidity, chemical or other environmental factors
- Regressed lens with 90 CRI LED creates a low-glare, visual comfortable direct and indirect illumination

### TECHNICAL SUMMARY


SIZE:	4"x4" and 6"x6" aperture
WATTAGE:	4" direct: 10W, 6" direct: 15W
LUMEN*	4" direct: 1000LM, 6" direct: 1400LM
EFFICACY	UP TO 95 LM/W at 3000K
INPUT VOLTAGE	120-277Vac
AVAILABLE CCT/CRI	Available in 2700K, 3000K, 3500K, 4000K / 90 CRI standard
CONTROL	0-10V 10% dimming, dim to off
VALIDATIONS	ETL & cETL wet location listed, IP54 and IK06 rated, FCC, RoHS
LIFETIME	L90>50,000 hours, 5 year warranty
OPERATION TEMP.	-30°F ~ 113°F / Emergency: 0°F ~ 113°F
FINISH	Standard: Dark Gray, Silver Gray and Sandy White, Premium: Terracotta Red, Texture Gray, Antique Rose, Charcoal Gray, Clary Sage



\*Delivered lumen may vary, refer to photometric for full performance data



### DIMENSIONS

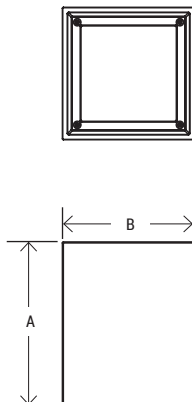

Size	A	B	WEIGHT
4" (Ceiling Light)	5.6"	4.5"	4.8 lbs
6" (Ceiling Light)	6.4"	5.7"	7.7 lbs

# CELIA CS

## Ceiling Mount Square Architectural Concrete Cylinder

MODEL NO.	TYPE	PROJECT/DATE
-----------	------	--------------

### ORDERING INFORMATION


\*Additional cost and/or lead time on customized fixtures may apply.

Series	Style	Size	Lumen Package	Input Voltage	CCT	Light Distribution	Control	Finish
CEL	CS - (Ceiling mount square)	4D - 4" direct only 6D - 6" direct only	10L - 1000LM/10W 14L - 1400LM/15W	U - (120-277V)	27K - (2700K)* 30K - (3000K) 35K - (3500K)* 40K - (4000K)	NC - (Narrow degree with clear lens) GC - (General degree with clear lens) GF - (General degree with frosted lens)	C10 - (0-10V 10% dimming, dim to off)	SW - (Sandy White) DG - (Dark Gray) SG - (Silver Gray) TR - (Terracotta Red)* TG - (Texture Gray)* AR - (Antique Rose)* CG - (Charcoal Gray)* CS - (Clary Sage)*

#### STANDARD COLOR



#### PREMIUM COLOR

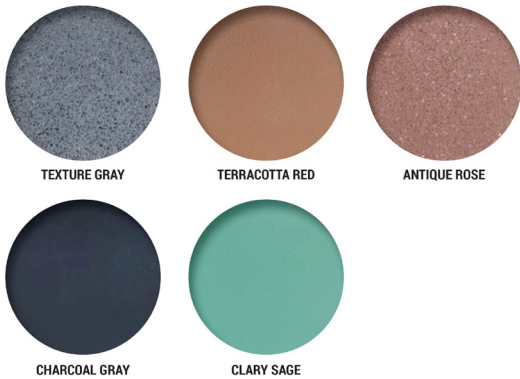

#### \*AVAILABLE ACCESSORIES: (SOLD SEPARATELY)

*Accessories
SP-EM40-AC-C - 40W remote mount field install emergency backup inverter
SP-EM40-SW - Remote test switch for SP-EM40-AC-C
JB-4-RD-WH/BD/BL/AL - Commercial Electrical Waterproof Box

### SPECIFICATIONS

#### CONSTRUCTION

Housing constructed with proprietary natural composite mix material of concrete and stones with stainless steel lens cover and screw.

#### FINISH

Natural concrete and stone mix finish available in dark gray, silver gray and sandy white, highly resistant to rust and decay caused by environmental factors. Premium colors include: Terracotta Red, Texture Gray, Antique Rose, Charcoal Gray and Clary Sage

#### OPTICS/DIFFUSER

Embossed aluminum reflector with harden glass lens, available in general 36 degree and narrow 24 degree beam angle, direct and omni directional.

#### ELECTRICAL

Long life COB LED package, 90 CRI standard, SDCM 5-step binning, Outdoor rated LED driver with input voltages of 120-277Vac, 0-10V 10% dimming, dim to off.

#### MOUNTING

Ceiling mount

#### VALIDATIONS

ETL and cETL wet location listed, IP54 and IK06 rated, FCC, RoHS