

MODEL NO.	TYPE	PROJECT/DATE
-----------	------	--------------

### KEY FEATURES

- Visual appealing concrete stone material housing creates an exceptional architectural texture perception
- Impervious to rust and decay caused by high humidity, chemical or other environmental factors
- Provide dark sky compliant asymmetrical and visual comfortable illumination to the pathway


### TECHNICAL SUMMARY

SIZE:	12", 18" and 30" Overall height
WATTAGE:	14W
LUMEN/EFFICACY*	300LM
INPUT VOLTAGE	120-277Vac
AVAILABLE CCT/CRI	2700K, 3000K, 3500K, 4000K at 80CRI standard
CONTROL	On/off with 0-10V driver no dimming wires
VALIDATIONS	ETL and cETL wet location listed, IP65 and IK08 rated, Dark sky compliant, FCC compliant, RoHS
LIFETIME	L70>100,000 hours, 5 year warranty
DISTRIBUTION	Asymmetric
OPERATION TEMP.	-30°F ~ 122°F
FINISH	Dark gray, Silver gray, Sandy white and Terracotta red

\*Delivered lumen may vary, refer to photometric for full performance data



### DIMENSIONS

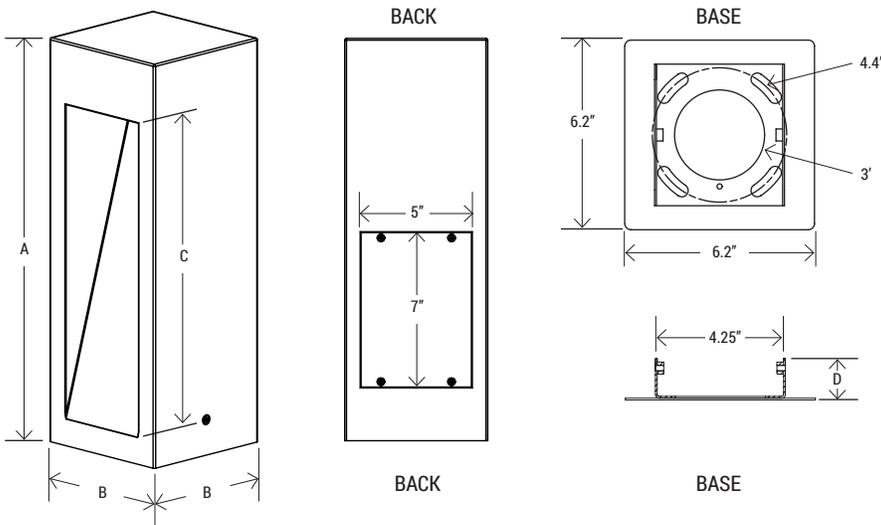

Model No.	A	B	C	D	WEIGHT
COS-F12	12"	6.3"	8"	1.4"	20 lbs
COS-F18	18"	6.3"	14"	2"	30 lbs
COS-F30	30"	6.3"	25.7"	2"	52 lbs

MODEL NO.	TYPE	PROJECT/DATE
-----------	------	--------------

### ORDERING INFORMATION

\*Additional cost and/or lead time on customized fixtures may apply.

<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>
Series	Size	Lumen Package	Voltage	CCT	Control	Finish				
COS	F12 - (12" Overall Height)	3L - (300LM)	U - (120-277V)	27K* - (2700K) 30K - (3000K) 35K* - (3500K) 40K - (4000K)	C1 - (On/off with 0-10V driver no dimming wires)	DG - (Dark Gray) SG - (Silver Gray) SW - (Sandy White) TR* - (Terracotta Red)				
	F18 - (18" Overall Height)									
	F30 - (30" Overall Height)									
						*(Made to Order)				



### \*Accessories

**BR-ANC** - Stainless steel 4 anchors set for Crosby (Required for installation, pre-ship option available)

*\*Available accessories sold separately*



**BR-ANC**  
Anchor base mounting kit  
(Required for installation, pre-ship option available)

### SPECIFICATIONS

#### CONSTRUCTION

Natural precast concrete with proprietary mix material of cement, stones and aggregates with stainless steel base, screws and glass lens rated for marine grade outdoor environment

#### FINISH

Natural concrete and stone mix finish available in dark gray, silver gray, sandy white and terracotta red highly resistant to rust and decay caused by environmental factors.

#### OPTICS/DIFFUSER

Glass diffused lens with either symmetric or asymmetric distribution.

#### ELECTRICAL

Long life LED system, Outdoor rated LED driver that accommodates input voltages of 120-277Vac at 50/60Hz with 0-10v dimming control function.

#### MOUNTING

New construction with anchor based mounting (anchors sold separately) or wedge anchor mount on existing concrete.

#### VALIDATIONS

ETL and cETL wet location listed, IP65 and IK08 rated, Dark sky compliant, FCC compliant, RoHS compliant