

CYCLO 3

Architectural Round Cylinder

MODEL NO.	TYPE	PROJECT/DATE
-----------	------	--------------

KEY FEATURES

- Slim profile for unobtrusive illumination
- Modular that offers various of optical, trim color and lens options
- Comprehensive list of mounting options


TECHNICAL SUMMARY

SIZE:	3" Aperture
WATTAGE:	19W, 13W, 8W
LUMEN*	1900LM, 1300LM, 800LM
EFFICACY	UP TO 100LM/W
INPUT VOLTAGE	120-277Vac
AVAILABLE CCT/CRI	2700K, 3000K, 3500K, 4000K / 90+CRI standard
CONTROL	0-10V 1% & Triac dual-dimming
VALIDATIONS	UL & cUL damp location listed, FCC, RoHS
LIFETIME	L70>56,000 hours, 5 year warranty
OPERATION TEMP.	-4°F ~ 104°F, 32°F ~ 104°F (EM)
FINISH	Housing: White/Black Trim: White/Black/Copper/Chrome

*Delivered lumen may vary, refer to photometric for full performance data



DIMENSIONS

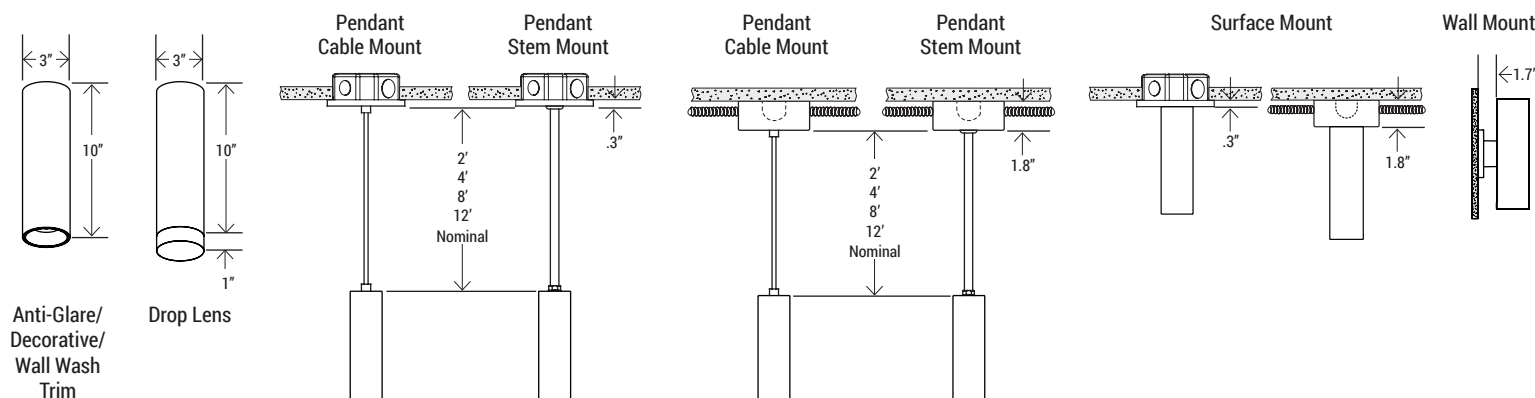

Weight: 1.5 lb

CYCLO 3

Architectural Round Cylinder

MODEL NO.	TYPE	PROJECT/DATE
-----------	------	--------------

ORDERING INFORMATION

*Additional cost and/or lead time on customized fixtures may apply.

Series	Size	Lumen Package	Input Voltage	CCT	Light Distribution	Lens & Diffuser Type	Control	Finish	Trim Finish*	Mounting**
CCR	3 - (3")	8L - (800LM) 13L - (1300LM) 19L - (1900LM)	U - (120-277V)	27K - (2700K) 30K - (3000K) 35K - (3500K) 40K - (4000K)	ND - (Narrow 24°) MD - (Medium 36°) WD - (Wide 60°)	SD - (Standard) IT - (Indirect transparent)* IB - (Indirect blue)*	CD - (0-10V 1% & Triac dual-dimming)	W - (White) B - (Black)	TW - (White) TB - (Black) TC - (Copper) TS - (Chrome) WW - (Wall wash lens white) WB - (Wall wash lens black) DL - (Transparent Drop Lens)	CR2 CR4 CR8 CR12 CS2 CS4 CS8 CS12 PR2 PR4 PR8 PR12 PS2 PS4 PS8 PS12 SR SS WM

*Only compatible with TW/TB/TC/TS

*TRIM FINISH:

White Housing



Black Housing



**Mounting

CR2 - 2' Cable pendant mount for recessed J-box
 CR4 - 4' Cable pendant mount for recessed J-box
 CR8 - 8' Cable pendant mount for recessed J-box
 CR12 - 12' Cable pendant mount for recessed J-box
 CS2 - 2' Cable pendant mount with surface conduit cutout J-box
 CS4 - 4' Cable pendant mount with surface conduit cutout J-box
 CS8 - 8' Cable pendant mount with surface conduit cutout J-box
 CS12 - 12' Cable pendant mount with surface conduit cutout J-box
 PR2 - 2' Swivelable Stem pendant mount for recessed J-box
 PR4 - 4' Swivelable Stem pendant mount for recessed J-box
 PR8 - 8' Swivelable Stem pendant mount for recessed J-box
 PR12 - 12' Swivelable Stem pendant mount for recessed J-box
 PS2 - 2' Swivelable Stem pendant mount with shrouded conduit cutout
 PS4 - 4' Swivelable Stem pendant mount with shrouded conduit cutout
 PS8 - 8' Swivelable Stem pendant mount with shrouded conduit cutout
 PS12 - 12' Swivelable Stem pendant mount with shrouded conduit cutout
 SR - Surface mount for recessed J-box
 SS - Surface mount with shrouded surface conduit cutout
 WM - Wall mount

SPECIFICATIONS

CONSTRUCTION

Extruded aluminum with die-cast aluminum accent ring.

FINISH

Housing is powder coating finish in white or black, trim finish are available in white, black, copper and chrome.

OPTICS/DIFFUSER

24°/36°/60° beam spread with multiple color trim, drop lens and indirect trim options.

ELECTRICAL

Long-life high efficiency COB LED, 120-277Vac Class 2 driver with adjustable output lumen, 0-10V dim to 1% and Triac dim to 10% standard.

MOUNTING

Pendant or surface mount with dedicated Cyclo mounting accessories, see mounting section for details.

VALIDATIONS

UL & cUL damp location listed, FCC, RoHS