DORIC SC

Architectural Square Column High

Spitzer LIGHTING

MODEL NO.	TYPE	PROJECT/DATE

KEY FEATURES

- Elegantly designed with visual-comfortable illumination performance
- Type III, Type V or fully luminated frosted diffused options available
- IP65 rated engine and driver compartment with IK08 Vandal resistant lens and housing

TECHNICAL SUMMARY

SIZE:	10', 12', 16' Overall Height
WATTAGE:	50W/40W/30W
LUMEN/EFFICACY*	6000/5000/4000LM, up to 115LM/W
INPUT VOLTAGE	120-277Vac; Optional in 277-480Vac
SURGE PROTECTION	10kV/5Ka
AVAILABLE CCT/CRI	3000K, 4000K, MTO: 2700K, 3500K, AMK (True Amber), PMK (2200K) / 80+CRI standard
CONTROL	On/off with 0-10V driver no dimming wires, On/Off Button Integrated Photocell optional, 0-10V Bi-level PIR occupancy sensor optional
VALIDATIONS	ETL & cETL wet location listed, IP65 and IK08 rated, IDA dark sky compliant (D3/D5 with black finish only), FCC compliant
LIFETIME	L70>100,000 hours, 5 year warranty
DISTRIBUTION	Type III, Type V, General Type V with single-piece extruded frosted PC diffuser
OPERATION TEMP.	-40°F ~ 122°F
FINISH	Standard finish: Matte Black (BK), Dark Bronze (DB), Silver Gray (SG), Matte White (WH) Premium finish: Pine Green (PG), Corten Brown (CB), Dark Platinum (DP) Premium Wood finishes: Walnut Wood (dark), Cherry Wood (brown), Oak Wood (light)

**Delivered lumen may vary, refer to photometric for full performance data*

Intertek IP65 WET LOCATION IK08 IMPACT RATED DARK SKY FRIENDLY

DIMENSIONS

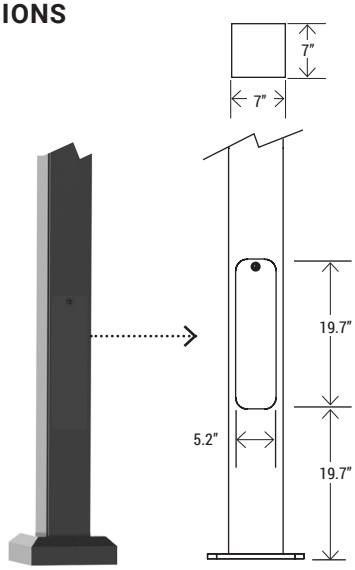



Anchor template



Base cover

Model No.	WEIGHT	
	D5	G5
DOC-SC-F4810 / DOC-SC-C4810	48 lbs	50 lbs
DOC-SC-F4812 / DOC-SC-C4812	53 lbs	55 lbs
DOC-SC-F4816 / DOC-SC-C4816	65 lbs	67 lbs

DORIC SC

Architectural Square Column High

Spitzer LIGHTING

MODEL NO.	TYPE	PROJECT/DATE

ORDERING INFORMATION

*Additional cost and/or lead time on customized fixtures may apply.

Series	Style	Size	Lumen Package	Input Voltage	CCT	Light Distribution	Control	Finish	Wood Body Finish
DOC	**SC -** (Square Column)	**F4810 -** (Flat top, 10ft OAH) **F4812 -** (Flat top, 12ft OAH) **F4816 -** (Flat top, 16ft OAH) **C4810 -** (Curve top, 10ft OAH) **C4812 -** (Curve top, 12ft OAH) **C4816 -** (Curve top, 16ft OAH)	**60LC -** (6000/5000/4000 LM)	**U -** (120-277Vac) **H -** (277-480Vac)*	**30K** - (3000K) **40K** - (4000K) **35K** - (3500K)* **27K** - (2700K)* **AMK -** (True amber color LED)* **PMK -** (Converted amber color LED)*	**D5** - (0 uplight Type V) **D3** - (0 uplight Type III) **G5** - (General Type V with frosted PC diffuser)*	**C1** - (On/off with 0-10V driver no dimming wires) **C0P** - (On/Off button photocell)* **CMP** - (0-10V Bi-level PIR occupancy sensor)*	**BK** - (Matte Black) **DB** - (Dark Bronze) **SG** - (Silver Gray) **WH** - (Matte White) **PG** - (Pine Green)* **CB** - (Corten Brown)* **DP** - (Dark Platinum)*	**WW** - (Walnut wood dark finish)* **BW** - (Cherry wood dark finish)* **OW** - (Oakwood dark finish)*

**Available accessories sold separately*

Curve Top

D5

G5

DOC-COLUMN-ANC

DOC-SC-CBC

DOC-SC-HHC

*Accessories

DOC-COLUMN-ANC - Stainless-steel anchor base mounting kit (Required for installation, pre-ship option available)

DOC-SC-CBC-BK/WH/DB/SG/CB - Spare Doric column square base cover with select finish

DOC-SC-HHC-BK/WH/DB/SG/CB - Spare Doric column handhole cover with select finish

RC-100 - Sensor remote

STANDARD COLOR



Dark Bronze | Matte Black | Silver Gray | Matte White

PREMIUM COLOR



Pine Green | Corten Brown | Dark Platinum

PREMIUM HEAT-TRANSFER WOOD FILM BODY FINISH*

WW Walnut wood dark finish

BW Cherry wood brown finish

OW Oakwood light finish

SPECIFICATIONS

CONSTRUCTION
Low copper aluminum alloy die-cast top with extruded aluminum body.

FINISH
Exterior parts are protected by a rust and corrosion proof zinc-infused polyester powder coating, optional hydrographic wood finish available.

OPTICS/DIFFUSER
Injection molded optic with UV proof PC lens available in Type III or Type V distribution, Type V with extruded frosted PC Lens.

ELECTRICAL
Long life LED system, Outdoor rated LED driver that accommodates input voltages of 120-277Vac at 50/60Hz with 0-10v dimming control function.

MOUNTING
Anchor based mounting (anchors sold separately)

VALIDATIONS
ETL & cETL wet location listed, IP65 and IK08 rated, IDA dark sky compliant (D3/D5 with black finish only), FCC compliant