

DOT 5

5" Architectural Glass Casting Sconces

MODEL NO. TYPE PROJECT/DATE

KEY FEATURES

- Choice of variety of artfully designed one-piece solid glass casted shade
- Suitable for both indoor and outdoor application, ADA compliant
- Provide visual comfortable and dimmable 90CRI illumination


TECHNICAL SUMMARY

SIZE:	5" (OD) x 3.3" (Depth)
WATTAGE:	10W
LUMEN/EFFICACY*	TG: 320LM @ 40LM/W AG: 250LM @ 31LM/W CG: 320LM @ 40LM/W
INPUT VOLTAGE	120Vac
AVAILABLE CCT/CRI	3000K / CRI >90, custom
CONTROL	Triac phase dimming to 10%
VALIDATIONS	ETL and cETL wet location listed, ADA, FCC, RoHS
LIFETIME	L70>70,000 hours, 5 year warranty
OPERATION TEMP.	-4°F ~ 104°F
FINISH	Black, White, Gold and Chrome (Base) / Transparent, Amber, Chrome (Glass)

*Delivered lumen may vary, refer to photometric for full performance data



DIMENSIONS

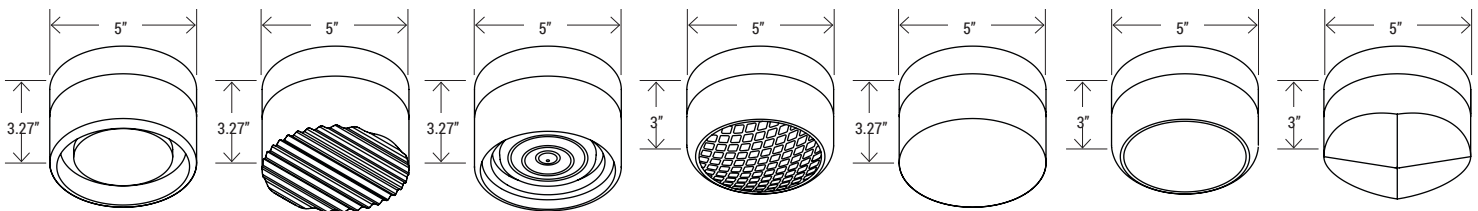

C6003
Concave
(3.5 LBS)

C6005
Reeded
(3.5 LBS)

C6006
Ripplet
(3.5 LBS)

C6008
Spotty
(3 LBS)

C6010
Flat
(3.5 LBS)

C6012
Convex
(3 LBS)

C6018
Baroque
(3 LBS)

DOT 5

5" Architectural Glass Casting Sconces

MODEL NO.	TYPE	PROJECT/DATE
-----------	------	--------------

ORDERING INFORMATION

*Additional cost and/or lead time on customized fixtures may apply.

- - - -

Series	Style	CCT	LED Engine Finish	Glass Type
DT5	C6003 - (Concave)	30K - (3000K) Custom*	BK - (Black finish engine base) WH - (White finish engine base) GD - (Gold finish engine base)** CH - (Chrome finish engine base)**	TG - (Transparent glass) AG - (Amber glass)** CG - (Chrome glass)**
	C6005 - (Reeded)			
	C6006 - (Ripplet)			
	C6008 - (Spotty)			
	C6010 - (Flat)			
	C6012 - (Convex)			
	C6018 - (Baroque)			

(Made to order)**

*AVAILABLE ACCESSORIES: (SOLD SEPARATELY)

*Accessories



TG
Transparent glass



AG**
Amber glass



CG**
Chrome glass

MFR4 - 4" Fire rated metallic electrical j-box housing

TP - Tamper proof locking screws

DT5-LEM-30K-WH/BK/GD/CH - DOT 5" LED Engine module, 10W, 120Vac, 3000K, WH/BK/GD/CH base

DT5-C6003-TG/AG/CG - DOT 5" Concave style glass, TG/AG/CG glass

DT5-C6005-TG/AG/CG - DOT 5" Reeded style glass, TG/AG/CG glass

DT5-C6006-TG/AG/CG - DOT 5" Ripplet style glass, TG/AG/CG glass

DT5-C6008-TG/AG/CG - DOT 5" Spotty style glass, TG/AG/CG glass

DT5-C6010-TG/AG/CG - DOT 5" Flat style glass, TG/AG/CG glass

DT5-C6012-TG/AG/CG - DOT 5" Convex style glass, TG/AG/CG glass

DT5-C6018-TG/AG/CG - DOT 5" Baroque style glass, TG/AG/CG glass

SPECIFICATIONS

CONSTRUCTION

5 inch OD Aluminum housing with one-piece solid casted glass shade.

FINISH

Polyester powder coat finish over a multi-stage pre-treatment.

OPTICS/DIFFUSER

One-piece solid casted glass shade.

ELECTRICAL

120Vac Driver-on-board, Triac/phase dim to 10%, long life LED board.

MOUNTING

Surface mount (wall or ceiling) directly to a standard 4" octagon J-box (3-1/2" junction box screw-hole spacing required for installation).

VALIDATIONS

ETL and cETL wet location listed, ADA, FCC, RoHS