
DOT 5 SQUARE

5" Square Architectural Glass Casting Sconce

MODEL NO.	TYPE	PROJECT/DATE

KEY FEATURES

- Choice of variety of artfully designed one-piece solid glass casted shade
- Suitable for both indoor and outdoor application, ADA compliant
- Provide visual comfortable and dimmable 90CRI illumination

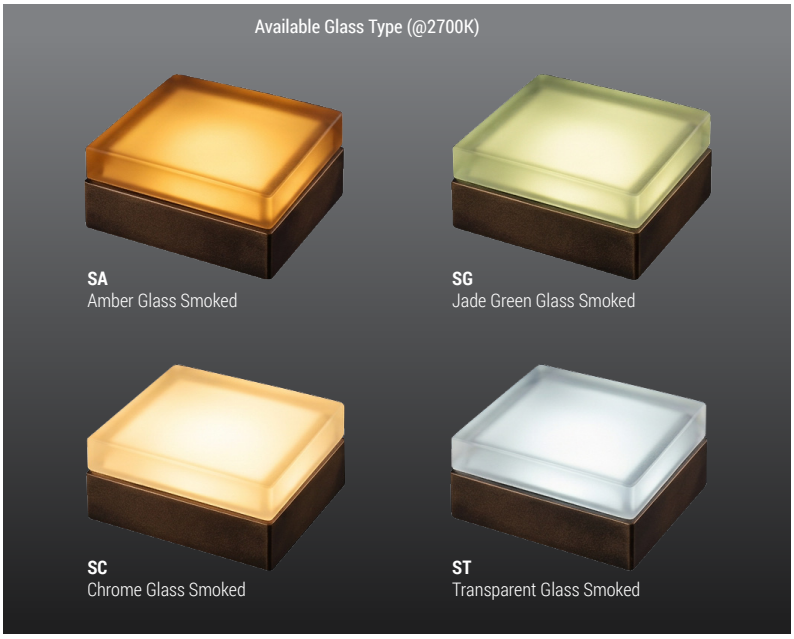

TECHNICAL SUMMARY


SIZE:	5" x 5" x 2.3" (Depth)
WATTAGE:	10W
LUMEN/EFFICACY*	**ST:** 450LM, **SA:** 120LM, **SC:** 185LM, **SG:** 180LM, up to 45LM/W
INPUT VOLTAGE	120Vac standard, 120-277Vac optional
AVAILABLE CCT/CRI	4000K, 3500K, 3000K, 2700K, CRI > 90
CONTROL	Triac phase dimming to 10% standard, 0-10V dim to 10% optional
VALIDATIONS	ETL and cETL wet location listed, ADA, FCC, RoHS
LIFETIME	L70>70,000 hours, 5 year warranty
OPERATION TEMP.	-4°F ~ 104°F
FINISH	Matte White, Matte Black, Gold and Chrome finish


Delivered lumen may vary, refer to photometric for full performance data





DIMENSIONS

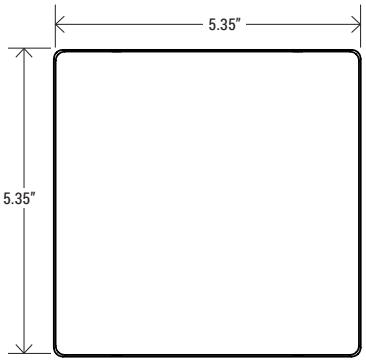

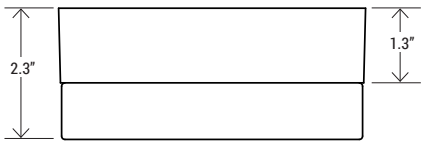

C6001
Flat Smoke
(3 LBS)

DOT 5 SQUARE

5" Square Architectural Glass Casting Sconce

Spitzer LIGHTING

MODEL NO.	TYPE	PROJECT/DATE

ORDERING INFORMATION

*Additional cost and/or lead time on customized fixtures may apply.

[ ] - [ ] - [ ] - [ ] - [ ]

Series	Style	CCT	LED Engine Finish	Glass Type
DT5S	**C6001 -** (Flat smoked)	**40K -** (4000K) **35K -** (3500K) **30K -** (3000K) **27K -** (2700K)	**BK** - (Black finish engine base) **WH** - (White finish engine base) **GD** - (Gold finish engine base) **CH** - (Chrome finish engine base)	**ST** - (Transparent glass smoked) **SA** - (Amber glass smoked)* **SC** - (Chrome glass smoked)* **SG** - (Jade Green smoked)*

*AVAILABLE ACCESSORIES: (SOLD SEPARATELY)



Black finish
LED engine base

White finish
LED engine base




Gold finish
LED engine base



Chrome finish
LED engine base

*Accessories
MFR4 - 4" Fire rated metallic electrical j-box housing
TP - Tamper proof locking screws
DT5S-LEM-XXK-WH/BK/GD/CH - DOT5 LED Engine module with 120Vac Triac dimming in matte white, matte black, gold or chrome finish
DT5SU-LEM-XXK-WH/BK/GD/CH - DOT5 LED Engine module with 120-277Vac 0-10V dimming in matte white, matte black, gold or chrome finish
DT5S-Cxxxx-ST/SA/SC/SG - Spare glass lens



MFR4
4" IC Fire Rated Metallic Electrical J-box housing

SPECIFICATIONS

CONSTRUCTION
5 inch x 5 inch aluminum housing with one-piece solid casted glass shade.

FINISH
Polyester powder coat finish over a multi-stage pre-treatment.

OPTICS/DIFFUSER
One-piece solid casted glass shade with smoky treated surface.

ELECTRICAL
120Vac Driver-on-board, Triac/phase dim to 10%, long life LED board.

MOUNTING
Surface mount (wall or ceiling) directly to a standard 4" octagon J-box (3-1/2" junction box screw-hole spacing required for installation).

VALIDATIONS
ETL and cETL wet location listed, ADA compliant