

DRIP

Neomodern Glass Sphere Pendant Luminaire

MODEL NO.	TYPE	PROJECT/DATE
-----------	------	--------------

KEY FEATURES

- Choice of variety of artfully designed one-piece solid glass casted sphere
- Provide visual comfortable & dimmable 90CRI illumination
- Neomodern Glass Sphere Pendant Luminaire


TECHNICAL SUMMARY

SIZE:	4" Diameter solid glass sphere
WATTAGE:	8W
LUMEN/EFFICACY*	TG: 400LM AG: 300LM CG: 300LM
INPUT VOLTAGE	120-277Vac
AVAILABLE CCT/CRI	Available in 2700K, 3000K, 3500K, 90CRI standard
CONTROL	Triac phase dimming to 10%
VALIDATIONS	ETL and cETL damp location listed, FCC, RoHS
LIFETIME	L70>70,000 hours, 5 year warranty
OPERATION TEMP.	-4°F ~ 104°F
FINISH	Black, White, Gold and Chrome (Housing and stem) / Transparent, Amber, Chrome (Glass)


*Delivered lumen may vary, refer to photometric for full performance data




DIMENSIONS

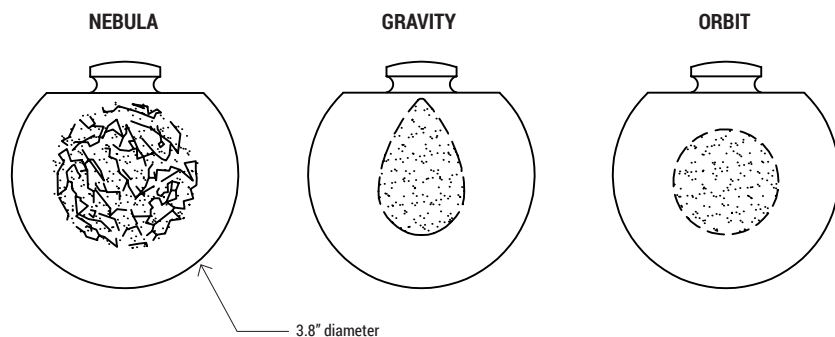

WIGHT: 5 LBS

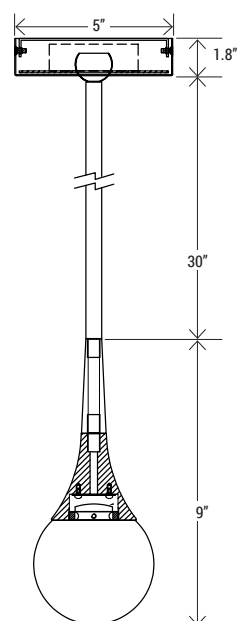

Ship with 1/4" (12.7mm OD) IPS connectable stems
2 pcs of 12" length and
1 pc of 6" length



DRIP

Neomodern Glass Sphere Pendant Luminaire

MODEL NO.	TYPE	PROJECT/DATE
-----------	------	--------------

ORDERING INFORMATION

*Additional cost and/or lead time on customized fixtures may apply.

	-		-		-	
Series	Style	CCT	Housing & Pendant Stem Finish (30")		Glass Type	
DIP	P29501 - (Nebula)	27K - (2700K) 30K - (3000K) 35K* - (3500K)	BK - (Black finish engine, stem and canopy) WH - (White finish engine, stem and canopy) GD - (Gold finish engine, stem and canopy) CH - (Chrome finish engine, stem and canopy)		TG - (Transparent glass) AG - (Amber glass)* CG - (Chrome glass)*	
	P29502 - (Gravity)					
	P29503 - (Orbit)					

GLASS TYPE



TG
Transparent glass



AG
Amber glass




CG
Chrome glass

*Accessories

MFR4 - 4" Fire rated metallic electrical j-box housing
DIP-PM-30-WH/BK/GD/CH - 30" (two 12", one 6") stem pendant mount with swivel canopy cover kit

*AVAILABLE ACCESSORIES: (SOLD SEPARATELY)



MFR4
4" IC Fire Rated Metallic
Electrical J-box housing

SPECIFICATIONS

CONSTRUCTION

4 inches OD one-piece solid casted glass sphere with craved art piece on a 3/8" OD pendant stems with canopy cover that can be swiveled up to 35 degree.

FINISH

LED engine housing is anodized finished in black, white, chrome or gold.

OPTICS/DIFFUSER

One-piece solid casted crystal glass sphere.

ELECTRICAL

120-277Vac Driver-on-board, Triac/phase dim to 10%, long life LED board.

MOUNTING

Stem pendant mount with standard 30" long (1 piece of 6" & 2 piece of 12") 35-degree swivel 1/4" (12.7mm OD) IPS stem kit. Canopy cover mount to a an industry standard 4" metal or plastic octagon junction box with 3-1/2" junction box screw-hole spacing.

VALIDATIONS

ETL and cETL damp location listed, FCC, RoHS