


MODEL NO.	TYPE	PROJECT/DATE
-----------	------	--------------

KEY FEATURES

- Curve Edge-lit provides direct/indirection low-glare visual comforting illumination
- Shallow yet rigid housing with standard CCT changeable option
- Circadian tunable white controls by wireless lighting control option available

TECHNICAL SUMMARY


SIZE:	2'x2', 2'x4'
WATTAGE:	2x2: 40/30/20W or 50/40/30W 2x4: 50/40/30W
LUMEN/EFFICACY*	4500LM/3300LM/2200LM / up to 115LM/W 6000LM/4000LM/3000LM / up to 115LM/W
INPUT VOLTAGE	120-277Vac
AVAILABLE CCT/CRI	35/40K changeable, 2700K-4000K tunable white / CRI >80
CONTROL	0-10V dim to 1%, Bi-level occupancy & daylight sensor, Lutron Athena Wireless control
VALIDATIONS	cETL & ETL damp location listed, IC rated, FCC, RoHS
LIFETIME	L90>50,000 hours, 5 year warranty
OPERATION TEMP.	-5°F ~ 104°F (AC) / 34°F ~ 104°F (with EM)
FINISH	Matte White, Antimicrobial White

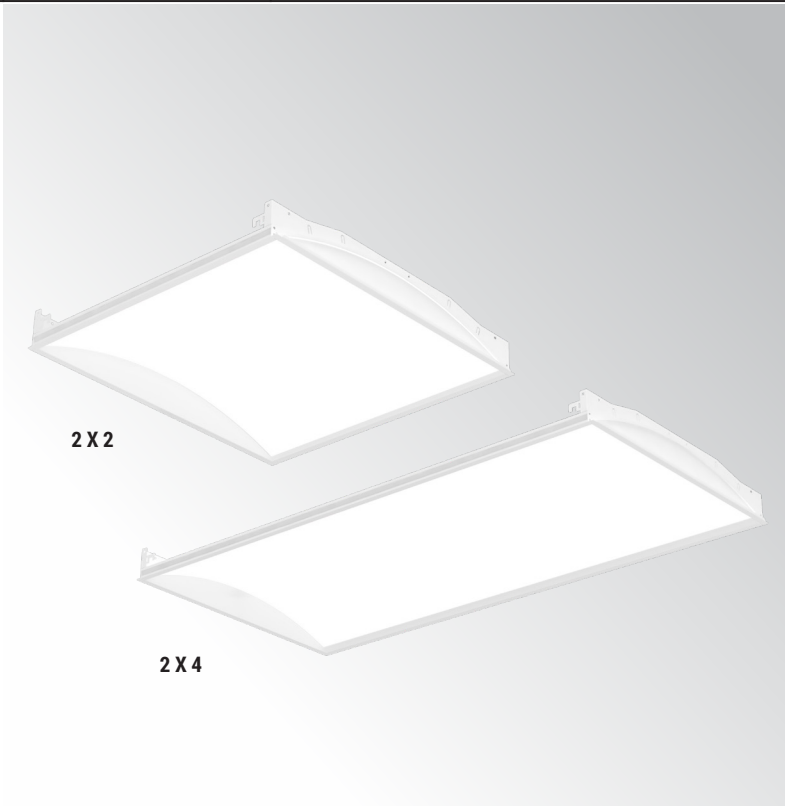

*Delivered lumen may vary, refer to photometric for full performance data



DIMENSIONS

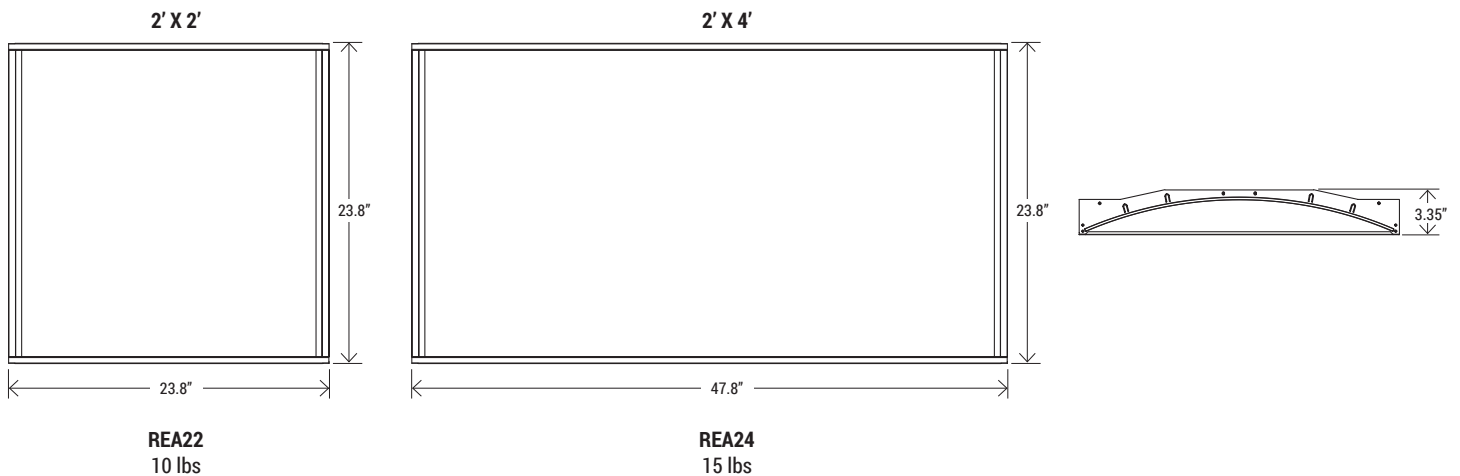

MODEL NO.	TYPE	PROJECT/DATE
-----------	------	--------------

ORDERING INFORMATION

*Additional cost and/or lead time on customized fixtures may apply.

<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>
Series	Size	Lumen Package	Input Voltage	CCT	Lens & Diffuser Type	Control	EM Option*	Misc. Option*						
REA	22 - (2'x2')	45LC (4500/3300/2200LM) 60LC (6000/4000/3000LM)	U - (120-277V)	CC - (35/40K changeable) TW* - (27K - 40K CCT tunable) A3 only**	GD - General Diffuser CL* - Cross louvers CS* - Center spine	C11 - (0-10V 1% Dimming) CMP - (0-10V Bi-Level PIR Occupancy Sensor)* CA1 - (0-10V with Athena Wireless Node)* A1 - Lutron Athena Wireless Dimming (A-WN-D01-RF)* A2 - (Lutron Athena with Bi-Level PIR & Daylight) (A-WN-D01-OCC)* A3 - (Lutron Athena Tunable White) (A-WN-D01-RF)	EM1 - (8W Factory Installed Integrated EM)	AM - Antimicrobial finish 90RA - 90 CRI						
	24 - (2'x4')	60LC (6000/4000/3000LM)												

** TW- & A3 Must be used together)

*AVAILABLE ACCESSORIES: (SOLD SEPARATELY)



BP-RMK-2x2/BP-RMK-2x4
Recessed dry wall flange mount kit



TT-CMKW-2x2/TT-CMKW-2x4
Surface mount kit


LENS & DIFFUSER TYPE



General Diffuser



Center Spine



Cross Louvers

*Accessories

- BP-RMK-2x2/BP-RMK-2x4** - Recessed dry wall flange mount kit
- TT-CMKW-2x2/TT-CMKW-2x4** - Surface mount kit
- RC-100** - Remote programmer for CMP
- MCF-185-6F** - Metal-clad flex whip, 18-gauge, 5 conductors Black/White/Green/Pink/Violet)
- MCF-186-6F** - Metal-clad flex whip, 18-gauge, 6 conductors Black(Switch hot)/Black(24/7 hot)/White/Green/Pink/Violet

*Available accessories sold separately

*Athena wireless control option is dedicated lumen only, please choose the lumen output from one of the 3 lumen package base on the size, example, ED/ENC/REA-24-xxL-U-CC-A1.

*The Athena wireless processor or Clear Connect gateway – Type X is required to operate an Athena wireless node in an Athena control system via a simple setup process using an iOS® or Android® compatible app. Check Lutron Athena spec for details.

*Lutron Athena wireless control is up to 100 Clear Connect – Type X devices per processor. Check Lutron Athena spec for details.

SPECIFICATIONS

CONSTRUCTION

Shallow 3.1" Rugged cold-rolled steel frame finished with polyester coating after fabrication with embossed facets. Laser-cut cruved acrylic light guide panel with diffuse provides indirect distribution.

FINISH

Polyester coated finish in powder coating after fabrication with embossed facets, Antimicrobial finish option available

OPTICS/DIFFUSER

Injection molded vertical anidolic PMMA light guide panel provides wide and visual comfortable illumination.

ELECTRICAL

Long-life LEDs standard 3500K and 4000K field selectable, 120-277Vac driver with adjustable output lumen and standard 0-10V dimming, 1% dimming, Lutron Athena wireless

MOUNTING

Drop ceiling lay-in, Dry wall ceiling recess via flange kit.

VALIDATIONS





cETL & ETL damp location listed, IC rated, FCC, RoHS

MODEL NO.	TYPE	PROJECT/DATE
-----------	------	--------------



Athena

An uncompromising solution. The Athena lighting control system empowers architects, lighting designers, electrical engineers, and facility managers with a native network of lighting, lighting controls, shades, and cloud-connected software that deliver exceptional experiences and building management.

	<p>A-WN-D01-RF-WH Plenum rated and can be installed above the ceiling for wireless control of a fixture without any impact on fixture aesthetics.</p>
	<p>A-WN-D01-RF-BK Plenum rated and can be installed above the ceiling for wireless control of a fixture without any impact on fixture aesthetics.</p>
	<p>A-WN-D01-OCC-WH Provides wireless control of the fixture and includes a passive infrared (PIR) sensor for occupancy and a daylight sensor.</p>
	<p>A-WN-D01-OCC-BK Provides wireless control of the fixture and includes a passive infrared (PIR) sensor for occupancy and a daylight sensor.</p>

