

# CANOPY SERIES

## PARKING GARAGE CANOPY SQUARE



### INSTALLATION MANUAL

PRODUCT PARAMETER	
INPUT VOLTAGE	120 -277V
DIMMING	1 - 10 VDC
MATERIAL	ALUMINUM & PC



#### SAFETY INFORMATION

**BE SURE THE POWER IS OFF! RISK OF ELECTRICAL SHOCK:** Always use the switch to power off. Do not perform any operations while this unit is powered on. The electrical system you want to connect the device to must be grounded. Read the instructions before using or powering this device. The safety instructions must remain with the unit in case of transfer. Any damage to the device linked to an inappropriate use is excluded from support by the warranty. Before connecting, make sure that the current and voltage are compatible with this device. We highly recommend that all installations are made by QUALIFIED ELECTRICIAN. We are NOT responsible by any means for the use or misuse of the following information. We are NOT responsible in whole or part for any harm or damage that may or may not be caused. We reserve the right to revise the components of any product, due to part availability or change ETL, CUL, UL standards without assuming any obligation or liability to modify any products previously manufactured and without notice. These instructions do not cover all details of variations in equipment, nor do they provide every possible contingency to be met. Turn off / unplug power when installing or service device.

#### WARNING

**WARNING:** Read all safety precautions and installation instructions carefully before installing or servicing this fixture. Failure to comply with these instructions could result in a potentially fatal electric shock, fire, and/or property damage.

- To prevent personal injury or product damage only licensed electricians should install
- To avoid electric shock or component damage disconnect power before attempting installation or servicing
- This product must be installed in accordance with the national electric code (NEC) and all applicable federal, state and local electric codes and safety standards
- Disconnect product and allow cooling prior to servicing
- Any alteration or modification of this product is expressly forbidden as it may cause serious personal injury, death, property damage and/or product malfunction
- To prevent product malfunction and/or electrical shock this product must be properly grounded
- This luminaire is designed to operate in ambient temperatures ranging from -22°F to 104°F and to be horizontally mounted with the LEDs facing down

#### PRE - INSTALLATION

- Carefully remove the fixture from the carton.
- Before beginning assembly, installation, or operation of product, make sure all parts are present. Compare parts with package contents list and diagram on previous page. If any part is missing or damaged, do not attempt to assemble, install or operate the product. Contact customer service for replacement parts.
- Tools required for assembly (Not Included): screwdriver, phillips screwdriver, pliers, electrical tape, wire cutters, safety glasses, ladder, wire stripper.

#### CARE AND MAINTENANCE

**CAUTION:** Before attempting to clean the fixture, disconnect the power to the fixture by turning the breaker off or removing the fuse from the fuse box. This LED light fixture is made from quality materials that will last many years with minimum care and maintenance. You may want to clean the fixture with a soft cloth periodically. To maintain the best appearance of the fixture, do not use cleaners with chemicals, solvents or harsh abrasives. Do not use liquid cleaner on the LEDs, LED driver, or wiring inside the light fixture.

#### FCC WARNING

**WARNING:** Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user authority to operate the equipment.


**NOTES:** This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.


#### PENDANT INSTALLATION WITH 3/4" CONDUIT (Caution: Before beginning installation turn off the circuit breaker and light switch)

STEP 1 →




Loosen the screw on the side of the light, removing the bracket from the canopy light by pulling it slightly out, just leaving the ring on the bracket.

STEP 2 →



Connect the wires threaded from conduit and canopy, black wire for line, white for neutral, yellow and green for ground.

STEP 3 →



Screw the conduit into the hole on top of canopy light installation done.

# CANOPY SERIES


## PARKING GARAGE CANOPY SQUARE



### INSTALLATION MANUAL


#### SURFACE MOUNT INSTALLATION W/J-BOX (Caution: Before beginning installation turn off the circuit breaker and light switch)

STEP 1 →




Loosen the screw on side of the light, removing the bracket from canopy light by pulling it slightly out, just leaving the ring on the bracket.

STEP 2 →



Fix the bracket on J-box, and put the wire through the central hole for wiring

STEP 3 →



Attach the canopy light with the bracket by putting the ring on clips again. Connect the black wire for line, white for neutral, yellow and green for ground.

STEP 4 →



Slide the canopy lights into the bracket, and secure the screw on side of the light to prevent the light from sliding out from the bracket. Installation done.


#### SURFACE MOUNT INSTALLATION (Caution: Before beginning installation turn off the circuit breaker and light switch)

STEP 1 →




Remove the lens and metal plate by unscrewing the screws.

STEP 2 →

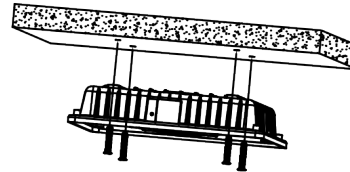


Cut off the wires through from 3/4" hole and plug the hole with provided plug. Drill 4 holes on edge of fixture and fix it on the ceiling with using appropriate screws.

STEP 3 →




Remove 1/2" plug from direction you intend to feed conduit.

STEP 4 →



Disconnect the wires came 3/4" hole and connect the wires came from 1/2" conduit with power supply. (white for neutral, black for line, yellow green/ green for ground).

STEP 5 →



Replace the metal plate and the lens, make sure no wires are pinched when replacing parts.