

WRAPAROUND SERIES

Low-Profile Wraparound Luminaire

Type:


Fixture:




TECHNICAL DATA

PRODUCT	BL-WR-246	BL-WR-486
SIZE	2FT	4FT
WATTAGE	25W	48W
LUMENS	2000 LM	4000 LM
EFFICACY	83 LM/W	80 LM/W
CCT	4000K, 5000K	3000K, 4000K, 5000K
VOLTAGE	100 - 277V	
CRI	>80+	
BEAM ANGLE	100°	
POWER FACTOR	>0.95	
WORKING TEMP	-40°F ~ 104°F	
DIMMING	NON-DIMMING	

LINK OPTIONS INCLUDED



Flush connection



1 ft Cable Connection

OPTIONAL



5 ft Cable Connection
BL-WR-5FT-CBL



DESCRIPTION

Our Low-Profile Wraparound might be the most versatile light on the market. It can be used any place a fluorescent fixture can, while its linkable capabilities lets you connect up to 8 lights. Very popular among residential/commercial garages, commercial retail space and offices.

INTENDED USE

The Wraparound series is ideal for illuminating commercial and retail spaces, residential and commercial garages, and residential and commercial basements.

ORDERING INFORMATION

STANDARD ITEM: **BL-WR-486-48W-40K**

OR CUSTOMIZE BELOW:



Series	Size	Wattage	CCT
BL-WR - (Low-Profile Wraparound Series)	246 - (24", 2FT)	25W	30K - (3000K)* 40K - (4000K)
	486 - (48", 4FT)	48W	50K - (5000K)

*3000K only available for 4FT

WRAPAROUND SERIES

Low-Profile Wraparound Luminaire

Type:

Fixture:

FEATURES

CONSTRUCTION

Lightweight steel body with durable plastic end caps and frosted polycarbonate diffuser, machine screws, drywall screws, and anchors, flush and 1ft connectors. 5ft connector optional.

FINISH

Lightweight steel body with durable white powder coating. Durable plastic end caps and polycarbonate diffuser

OPTICS

Frosted PC cover.


ELECTRICAL

Class 2, constant current, 100-277V, 50/60 Hz



LISTINGS

ETL certified. Energy Star.

DIMENSIONS

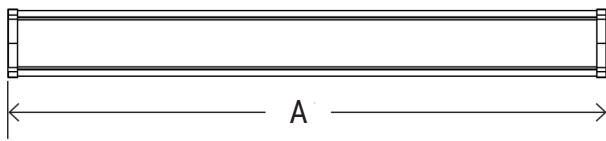


BL-WR-486

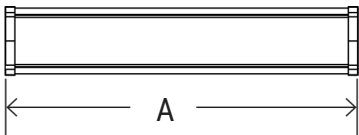



BL-WR-246

PRODUCT	A	B	C
BL-WR-246	24 in (609 mm)	1.5 in (38.1 mm)	5.5 in (139.7 mm)
BL-WR-486	48 in (1219 mm)	1.5 in (38.1 mm)	5.5 in (139.7 mm)

PHOTOMETRICS

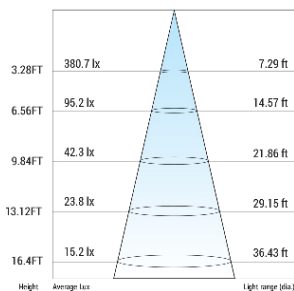

BL-WR-246

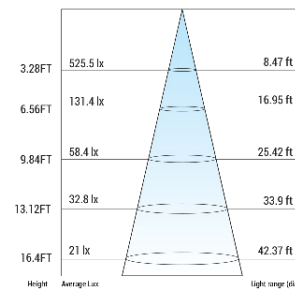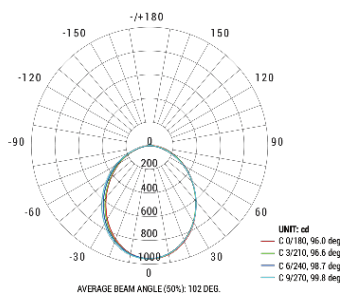

BL-WR-486

