

FLAT PANEL SERIES

Back-Lit Panel Luminaire


Type:

Fixture:



TECHNICAL DATA

PRODUCT	BP1	BP4		BP7
SIZE	1' X 4'	2' X 2'		2' X 4'
WATTAGE	30W			40W
LUMENS	3300 LM	3217 LM	3255 LM	4057 LM
EFFICACY	110 LM/W	105 LM/W	106 LM/W	
CCT/CC	CCT 4000K, CC 4000K/5000K		CCT 3500K, CC 4000K/5000K	
VOLTAGE	120 - 277V			
DIMMING	1 - 10V			
CRI	>80+			
LENS	ACRYLIC			
THD	<13.1%			
POWER FACTOR	>0.918			
WORKING TEMP.	-13°F ~ 104°F			

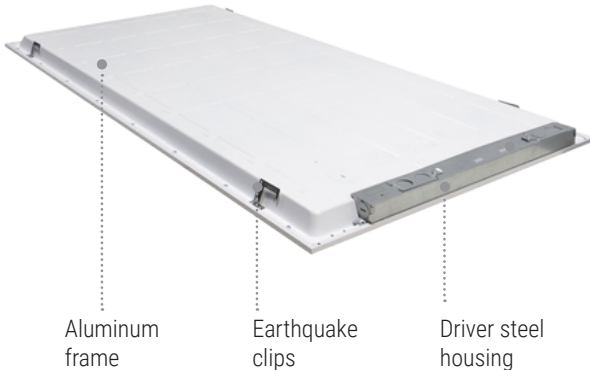

Aluminum frame

Earthquake clips

Driver steel housing

DESCRIPTION

Replace those old fluorescent fixtures with cost saving, lightweight, even light transmittance Back-Lit Panels. Creates better light distribution than their edge-lit counterparts. Multiple sizes allow for ease of installation on any drop / t-bar style ceiling. Can be surface mounted with frames (sold separately)

INTENDED USE

Our Flat Panel Series is ideal for any commercial building requiring a drop / t-bar ceiling compatible fixture.



ORDERING INFORMATION

STANDARD ITEM: **BP4-30W-CDS-CC**

OR CUSTOMIZE BELOW:



Series	Size	Wattage	CDS	CCT
BP - (Back-Lit Panel)	1 - (1' x 4')	30W	CDS - (Version, Dimmable, Standard)	40K - (4000K) CC - (4000K/ 5000K Color Changeable)
	4 - *(2' x 2')	30W		35K - (3500K) CC - (4000K/ 5000K Color Changeable)
	7 - (2' x 4')	40W		35K - (3500K) CC - (4000K/ 5000K Color Changeable)

AVAILABLE ACCESSORIES

*SOLD SEPARATELY



BP-EMB-8W
EM Battery Solution

FLAT PANEL SERIES

Back-Lit Panel Luminaire

Type:

Fixture:

FEATURES

CONSTRUCTION

Lightweight steel housing with aluminum frame. Acrylic diffuser, earthquake clips, multiple knock-outs for power supply and sensor area. Low profile driver mounted on edge. Multiple provisions for emergency backup battery and bracket installation.

FINISH

Environmentally friendly polyester powder coatings are formulated for high durability and long-lasting color, and contain no VOC or toxic heavy metals.

OPTICS

Acrylic diffuser provides even smooth light transmittance.


ELECTRICAL

Constant current, 120-277V, 28-42 VDC, 0.78A, 50-60 H. 1-10V dimming.


LISTINGS

ETL Certified. DLC Premium Listed.


DIMENSIONS

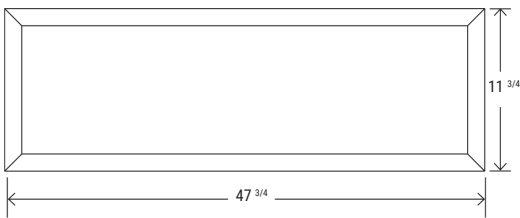

1x4

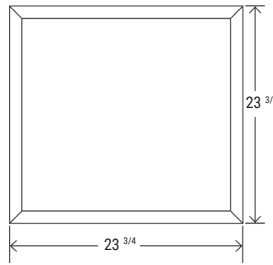


2x2


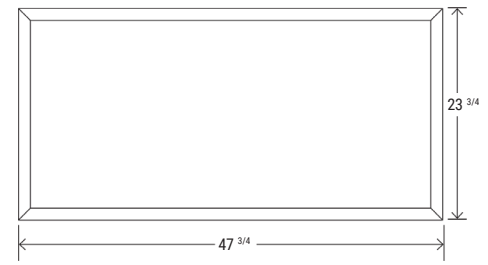


2x4



PHOTOMETRICS

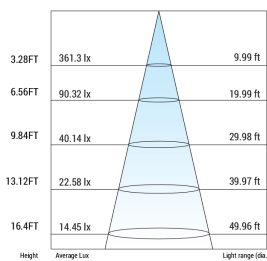

BP1

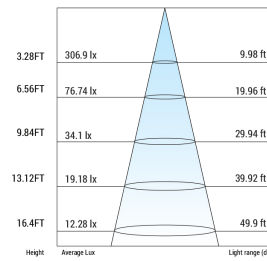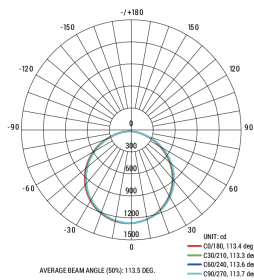

BP4

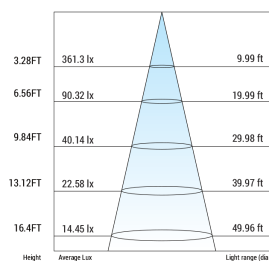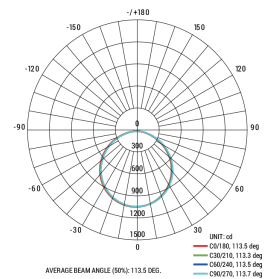

BP7

