

# DISK LIGHT SERIES

Surface-Mount 5CCT Changeable Downlight

Type:

Fixture:



### TECHNICAL DATA

PRODUCT	DSCV-408	DSCV-610
SIZE	4"	6"
WATTAGE	12W	15W
LUMENS	840 LM	1050 LM
EFFICACY	70 LM/W	
CC	2700K/ 3000K/ 3500K/ 4000K/ 5000K Color Changeable	
VOLTAGE	120V	
DIMMING	TRIAC DIMMING	
CRI	>80	
BEAM ANGLE	104°	
POWER FACTOR	>0.9	
WORKING TEMP.	-5°F ~ 104°F	

### DESCRIPTION

The Surface Mount Downlight brings you a modern ceiling lighting solution. It can be installed on a junction box with the surface mounting bracket which is included in the package. With 5 color selectable feature, this downlight satisfies most application needs in shopping centers, business buildings, hotels, airports, hospitals, and residential areas.

### FEATURES

#### CONSTRUCTION

Unit includes die-cast metal housing, LED array, heat sinks, surface mounting bracket adapter and smooth disk trim.

#### FINISH

White finish.

#### OPTICS

High quality PC lens. Efficiency LED array. Diffuse for uniform illumination.

#### ELECTRICAL

High efficiency integral 120V, 60Hz constant current dimming driver. Smooth flicker free deep dimming to 10%.

#### LISTINGS

Energy Star listed. ETL certification. RoHs compliant, contains no mercury or lead. Suitable for wet location. 5 year warranty.



### ORDERING INFORMATION


STANDARD ITEM: **DSCV-408-5CC**

OR CUSTOMIZE BELOW:

<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>
Series	Size	Lumen Package	CC	
DSCV - (Surface Mount Downlight)	4 - (4")	08 - (840 lm, 12W)	5CC - 5 Color Changeable (2700K, 3000K, 3500K, 4000K, 5000K)	
	6 - (6")	10 - (1050 lm, 15W)		

### INSTALLATION/ MOUNTING

Designed to mount to a Junction Box

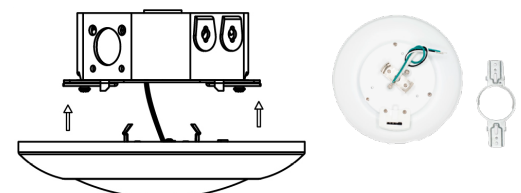

DSCV-610 : ø 7.92" x 2.12" (h)  
 DSCV-408 : ø 6.25" x 2.12" (h)