


EDGE-LIT PANEL SERIES

High Performance Edge-Lit Panel

Type:


Fixture:

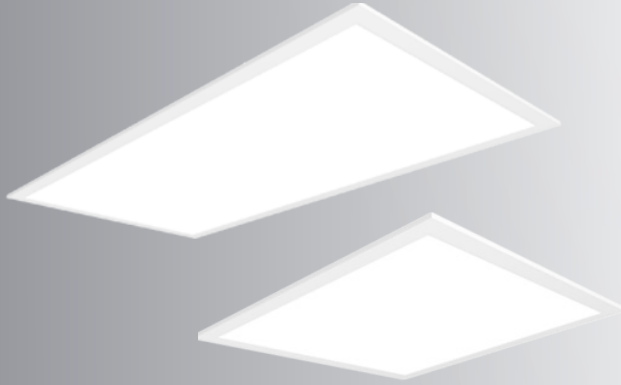

TECHNICAL DATA

| PRODUCT | ELP-22 | ELP-24 |
|---------------|---------------|----------|
| SIZE | 2' x 2' | 2' x 4' |
| WATTAGE | 36W | 48W |
| LUMENS | 4860 LM | 6240 LM |
| EFFICACY | 133 LM/W | 132 LM/W |
| CCT | 4000K, 5000K | |
| VOLTAGE | 120 - 277V | |
| DIMMING | 0 - 10V | |
| CRI | >80+ | |
| LENS | ACRYLIC | |
| POWER FACTOR | >0.918 | |
| WORKING TEMP. | -13°F ~ 104°F | |

PRODUCT DIAGRAM

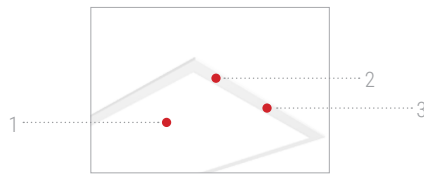

1. PMMA light guide plate
2. Aluminum Frame
3. Earthquake Clips

DESCRIPTION

Replace those old fluorescent fixtures with cost saving, light weight, even light transmittance Edge-Lit Panels. ELP creates an even light distribution that stands out from counterparts. Multiple sizes allow for ease of installation on any drop T-bar style ceiling can be surface mounted with frames (Sold Separately).

INTENDED USE

The Edge-Lit Panel is ideal for any commercial building requiring a drop/T-bar ceiling compatible fixture.



ORDERING INFORMATION

STANDARD ITEM: **ELP-22-48L-40K**

OR CUSTOMIZE BELOW:



| Series | Size | Lumen Package | CCT |
|-------------------------------|----------------|----------------------|--------------------------------|
| ELP - (Edge-Lit Panel Series) | 22 - (2' x 2') | 48L - (4860 lm, 36W) | 40K - (4000K) 50K - (5000K) |
| | 24 - (2' x 4') | 62L - (6240 lm, 48W) | |

EDGE-LIT PANEL SERIES

High Performance Edge-Lit Panel

Type:

Fixture:

FEATURES

CONSTRUCTION

Lightweight steel housing with aluminum frame, acrylic diffuser, earthquake clips, multiple knock-outs for power supply and sensor area. Low profile driver mounted on edge. Multiple provisions for emergency back up battery and bracket installation.

FINISH

Environmentally friendly polyester powder coatings are formulated for high durability and long-lasting color, and contain VOC or toxic heavy metals.

OPTICS

Acrylic diffuser provides even smooth light transmittance.


ELECTRICAL

Constant Current, 120 - 277V 28-42 VDC, 0.78 A, 50 - 60 Hz, requires separate circuit dimming, 0-10V dimming.



LISTINGS

UL certified.

DIMENSIONS



ELP-22

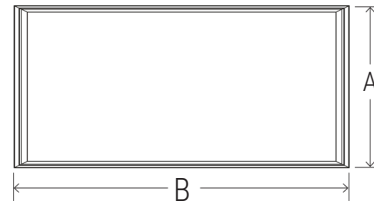


ELP-24




| Product | A | B | C | D |
|---------|----------------------|-----------------------|-----------------|------------------|
| ELP-22 | 23.75 in (603.25 mm) | 23.75 in (603.50 mm) | 1.97 in (50 mm) | .47 in (11.9 mm) |
| ELP-24 | 23.75 in (603.25 mm) | 47.50 in (1206.50 mm) | 1.97 in (50 mm) | .47 in (11.9 mm) |

PHOTOMETRICS

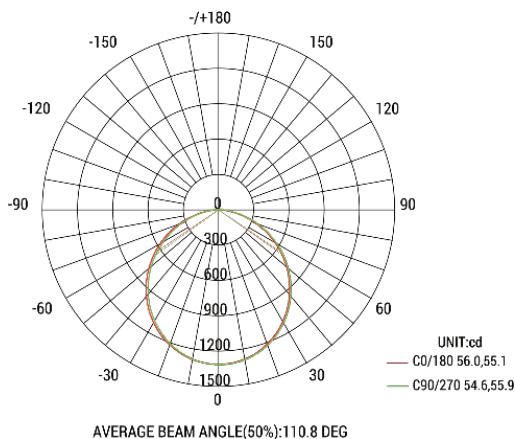

ELP-22

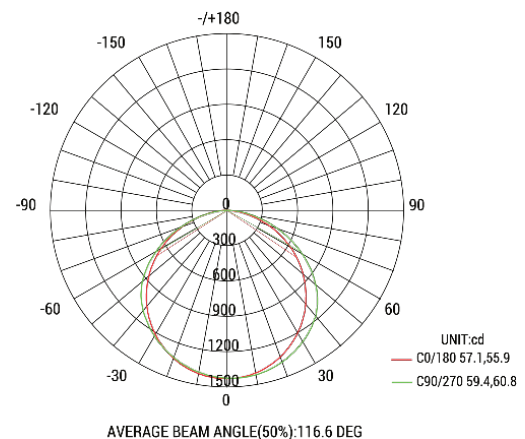

ELP-24