

FLOODLIGHT SERIES

Floodlight Mini Luminaire

Type:

Fixture:




TECHNICAL DATA

PRODUCT	FLM-13L	FLM-36L
WATTAGE	10W	30W
LUMENS	1316 LM	3660 LM
EFFICACY	133 LM/W	128 LM/W
CRI	>80	>74
POWER FACTOR	>0.9	>0.983
CCT	5000K	
VOLTAGE	100 - 277VAC	
BEAM ANGLE	110°	
THD	<15%	
WORKING TEMP.	-40°F TO 104°F	

1/2" KNUCKLE MOUNT INSTALLATION

*STANDARD

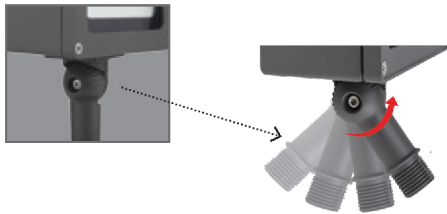

DESCRIPTION

The Floodlight Mini is a great way to illuminate and give character to areas with signage needing constant attention. The Floodlight Mini is maintenance free and low-heat operation of LED which is perfect for landscaping owners.

INTENDED USE

Our Floodlight series is widely used for both indoor and outdoor applications, even in wet locations. The floodlight is excellent for underground parking lots, museums, art galleries, side walks, schools, residential areas, & many more.



ORDERING INFORMATION

STANDARD ITEM: **FLM-36L-U-50K**

OR CUSTOMIZE BELOW:

<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>
Series		Lumen Package		Voltage		CCT
FLM - (Floodlight Mini)		13L - (1316 lm, 10W) 36L - (3660 lm, 30W)		U - (100 - 277V)		50K - (5000K)

FLOODLIGHT SERIES

Floodlight Mini Luminaire

Type:

Fixture:

FEATURES

CONSTRUCTION

Precision die-cast aluminum housing, finned heat sink, knuckle mount.

FINISH

Rust and corrosion proof with bronze polyester powder coating.

OPTICS

Tempered glass.


ELECTRICAL

Class 2, constant current, 100 - 277V, 50/60 Hz

LISTINGS

ETL certified. DLC Listed. Luminaire is IP65 rated.




DIMENSIONS

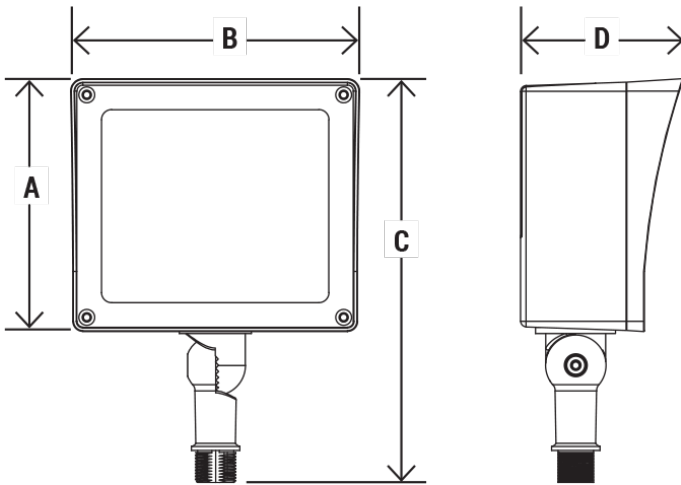

Product	A	B	C	D
FLM-13L	4"	4.5"	7"	2.5"
FLM-36L	5"	5.5"	8"	3"

PHOTOMETRICS

FLM-13L

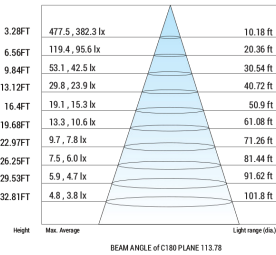

FLM-36L

