

# FLOODLIGHT Series

## Rectangle Floodlight Luminaire

Type:


Fixture:



### TECHNICAL DATA

PRODUCT	FLR-54L	FLR-88L
WATTAGE	45W	70W
LUMENS	5490 LM	8890 LM
EFFICACY	122 LM/W	127 LM/W
CCT	5000K	
VOLTAGE	120-277 Vac	
LIGHTING ANGLE	80°	
CRI	Ra>70	
FINISH	Dark Bronze, Black, White	
POWER FACTOR	>0.95	
WORKING TEMP.	-22F° ~ 113°F	

TRUNNION MOUNT  
SOLD SEPARATELY



#### FLR-TRN

Trunnion mount  
\*SOLD SEPARATELY

### DESCRIPTION

The Floodlight die cast aluminum cooling design aids in a better cooling system. The optical design also improves light utilization and evenness furthering luminous efficiency and long working life.

### INTENDED USE

The Floodlight series is widely used as both indoor and outdoor lighting. Excellent for galleries, office buildings, outdoor pathways, shopping malls, lighting Signage, building faces, and entryways.



### ORDERING INFORMATION

STANDARD ITEM: **FLR-54L-U-50K-DB**

OR CUSTOMIZE BELOW:

[ ]	-	[ ]	-	[ ]	-	[ ]	-	[ ]
Series		Lumen Package		Voltage		CCT		Finish
<b>FLR</b> - (Rectangle Flood Light)		<b>54L</b> - 5490 lm (45W) <b>88L</b> - 8890 lm (70W)		<b>U</b> - (120-277 Vac)		<b>50K</b> - (5000K)		<b>DB</b> - (Dark Bronze) <b>W</b> - (White) <b>B</b> - (Black)

# FLOODLIGHT Series

## Rectangle Floodlight Luminaire

Type:

Fixture:

### FEATURES

#### CONSTRUCTION

Die-cast aluminum.

#### FINISH

Dark bronze, white, black finish. Environment friendly polyester powder coating.

#### OPTICS

High light transmittance and polycarbonate with UV.


#### ELECTRICAL

Class 2, constant current, 120V-277V, 50-60 HZ, 0.95Amp@100V.

#### LISTINGS

UL certified. DLC Listed.

### DIMENSIONS

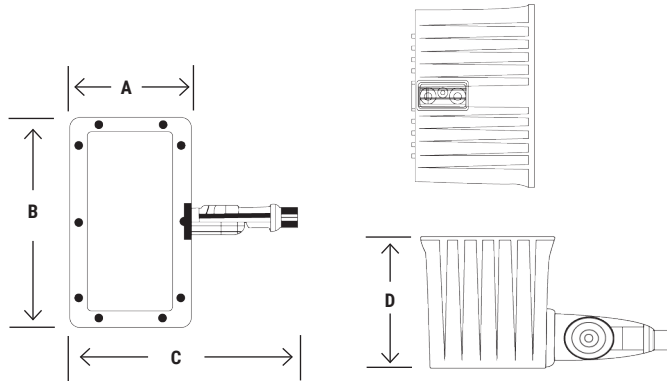

Knuckle Mount:

PRODUCT	A	B	C	D
<b>FLR-54L</b>	<b>4.33"</b> (110 mm)	<b>8.67"</b> (220 mm)	<b>8.14"</b> (206.96 mm)	<b>4.96"</b> (126 mm)
<b>FLR-88L</b>				


### AVAILABLE ACCESSORIES

\*SOLD SEPARATELY




**FLR-TRN**  
Trunion Mount

### PHOTOMETRICS

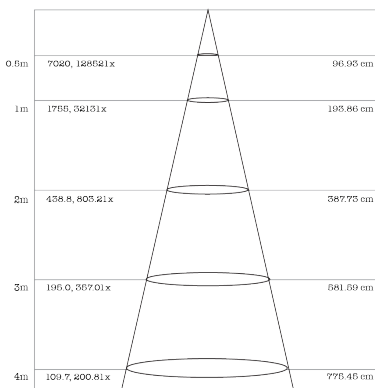

CO PLANE ISOLUX DIAGRAM (UNIT: 1x)

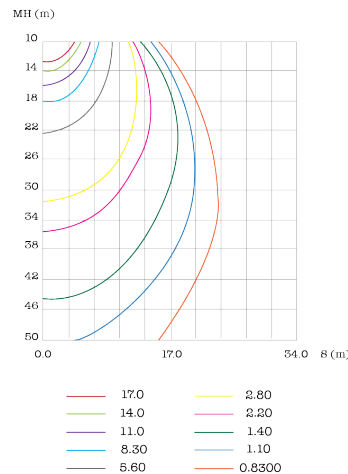

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

