

LINEAR HIGH BAY SERIES

Linear High Bay Luminaire

Type:

Fixture:



TECHNICAL DATA

PRODUCT	LHB-2FTN	LHB-2FTN	LHB-2FTW
WATTAGE	90 W	135 W	223 W
LUMENS	12222 LM	18322 LM	29594 LM
EFFICACY	137 LM/W	136 LM/W	133 LM/W
CCT	5000K		
BEAM ANGLE	100°		
VOLTAGE	120V-277V		
DIMMING	1-10V		
CRI	>82+		
LENS	ACRYLIC		
POWER FACTOR	>0.931		
THD	<14.6%		
WORKING TEMP.	-40°F ~ 104°F		

MOUNTING OPTION



Suspended (Standard)



Pendant



Surface w/ J-box

DESCRIPTION

The Linear High Bay with its all-in-one design replaces heavy, hot, and dangerous fluorescent lights. Lightweight and slim with multiple mounting situations available put it at the top of the list for any high ceiling area where super bright light is needed.

INTENDED USE

The Linear High Bay is ideal for illuminating indoor warehouses, automotive garages, aircraft hangars, and high ceiling commercial spaces.



ORDERING INFORMATION

STANDARD ITEM: **LHB-2FTN-90W-50K**

OR CUSTOMIZE BELOW:



Series	Size	Wattage	CCT
LHB - (Linear High Bay Series)	2FTN - (2FT - Narrow)	90W 135W	50K - (5000K)
	2FTW - (2FT - Wide)	223W	

LINEAR HIGH BAY SERIES

Linear High Bay Luminaire

Type:

Fixture:

FEATURES

CONSTRUCTION

Die-formed steel, hanging chain (42"), "V" hook.

FINISH

Painted in high gloss durable white finish.

OPTICS

Frosted PC cover.


ELECTRICAL

Class 2, constant current, 100V-277V, 50-60 HZ, 0.95Amp@100V. 1-10V dimming.



LISTINGS

ETL certified. DLC Listed.


DIMENSION

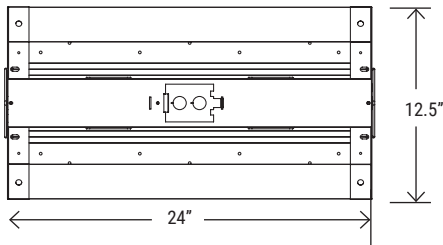

LHB-2FTN-90W / LHB-2FTN-135W

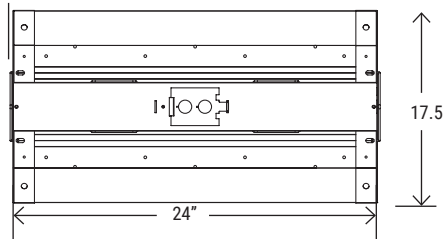

LHB-2FTW-223W



AVAILABLE ACCESSORIES



Motion Sensor
LHB-BR1819P-B-0



Surface Mount Bracket
LHB-SM-Bracket





Cage
LHB-Cage





Emergency Battery
LHB-25U-48-EA



PHOTOMETRICS



90W

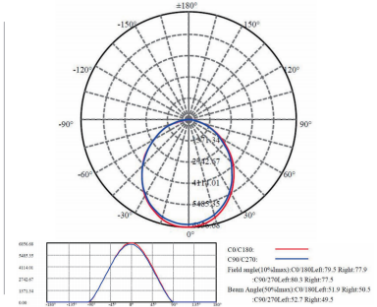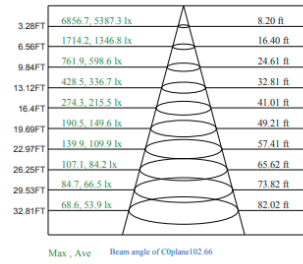

135W

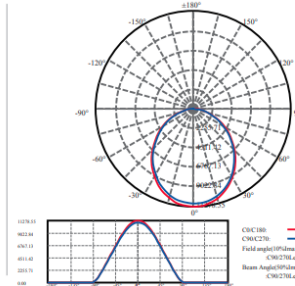

223W