

# PARKING GARAGE SERIES

## Parking Garage Canopy Square

Type:

Fixture:



### TECHNICAL DATA

PRODUCT	PGCS-60L	PGCS-87L
WATTAGE	45W	65W
LUMENS	6075 LM	8775 LM
EFFICACY	135 LM/W	
CCT	5000K	
VOLTAGE	120 - 277V	
DIMMING	1 - 10VDC	
CRI	70	
POWER FACTOR	0.9	
WORKING TEMP.	-22°F ~ 113°F	
FINISH	DARK BRONZE, RAL CUSTOM	

### — MOUNTING OPTIONS —



Surface Mount



Pendant

### DESCRIPTION

The Parking Garage Canopy Square is wrapped in a die cast aluminum aiding in better cooling and light quality. This product features a high efficiency LED driver furthering the product work life. The optical design also greatly improves light utilization and evenness.

### INTENDED USE

Our Canopy series widely used in outdoor lighting, including wet locations. The Canopy is excellent for museums, art galleries, parking garages, buildings, lawns, industrial areas, Residential areas, sidewalks, schools, and many more applications.



### ORDERING INFORMATION

STANDARD ITEM: **PGCS-60L-50K-DB**

OR CUSTOMIZE BELOW:



Series	Lumen Package	CCT	Finish
<b>PGCS</b> - (Parking Garage Canopy Square)	<b>60L</b> - (6075 lm, 45W) <b>87L</b> - (8775 lm, 65W)	<b>50K</b> - (5000K)	<b>DB</b> - (Dark Bronze) <b>RAL</b> - (Custom Color)*

\*Custom color available. Please contact us for more information.

# PARKING GARAGE SERIES

## Parking Garage Canopy Square

Type:

Fixture:

### FEATURES

#### CONSTRUCTION

Shell materials: Aluminum & PC.

#### FINISH

Painted in a dark bronze or RAL custom finish. Based in an environmentally friendly polyester coating.

#### OPTICS

Frosted PC cover.


#### ELECTRICAL

Class 2, constant current, 120V-277V, 50-60 HZ, 0.95Amp@100V. 1-10V dimming.

#### LISTINGS

UL certified. DLC Listed.

### DIMENSIONS

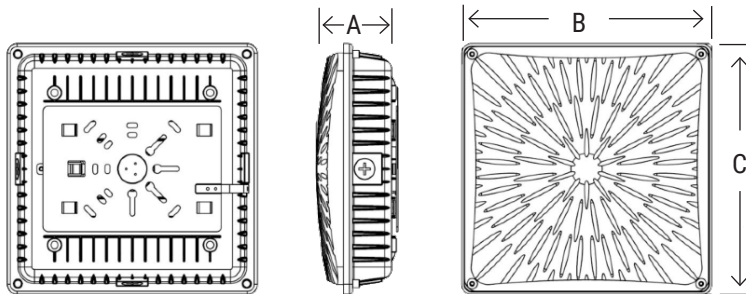

PRODUCT	A	B	C
PGCS-60L	3.3 in (83 mm)	10.05 in (255 mm)	10.05 in (255 mm)
PGCS-87L	3.3 in (83 mm)	10.05 in (255 mm)	10.05 in (255 mm)

### PHOTOMETRICS

