

PARKING GARAGE SERIES

Square Parking Garage Luminaire

Type:

Fixture:



TECHNICAL DATA

PRODUCT	PGS-54L	PGS-85L	PGS-54L	PGS-85L
WATTAGE	45W	70W	45W	70W
LUMENS	5400 LM	8400 LM	5490 LM	8540 LM
EFFICACY	120 LM/W		122 LM/W	
CCT	40K		50K	
VOLTAGE	120 - 277V			
DIMMING	1 - 10V			
CRI	70			
POWER FACTOR	0.9			
UPLIGHT	15%			
WORKING TEMP.	-22°F ~ 113°F			
FINISH	DARK BRONZE, WHITE			

— MOUNTING OPTION —



Surface Mount



Pendant

DESCRIPTION

The Square Parking Garage Luminaire is wrapped in die cast aluminum aiding in better cooling & light quality. This product features a high efficiency LED driver furthering the product work life. The optical design also greatly improves light utilization and evenness.

INTENDED USE

Out Parking Garage series can be widely used for indoor and outdoor applications, even in wet locations. The Square Parking Garage light is excellent for museums, art galleries, shopping malls, parking garages, and many more applications.



ORDERING INFORMATION

STANDARD ITEM: **PGS-54L-50K-DB**

OR CUSTOMIZE BELOW:

Series	Lumen Package	CCT	Finish
PGS - (Square Parking Garage Luminaire)	54L - (5400 lm, 45W)	40K - (4000K)	DB - (Dark Bronze) W - (White)
	85L - (8400 lm, 70W)		
	54L - (5490 lm, 45W)	50K - (5000K)	
	85L - (8540 lm, 70W)		

AVAILABLE ACCESSORIES

*SOLD SEPARATELY



PGS-BRI810-C-F
MOTION SENSOR



RC-100
REMOTE CONTROL

PARKING GARAGE SERIES

Square Parking Garage Luminaire

Type:

Fixture:

FEATURES

CONSTRUCTION

Shell materials: Aluminum & PC.

FINISH

Dark bronze, white, or RAL color.

OPTICS

Frosted PC cover.


ELECTRICAL

Class 2, constant current, 120V-277V, 50-60 HZ, 0.95Amp@100V. 1-10V dimming

LISTINGS

UL certified. DLC Premium Listed.

DIMENSIONS

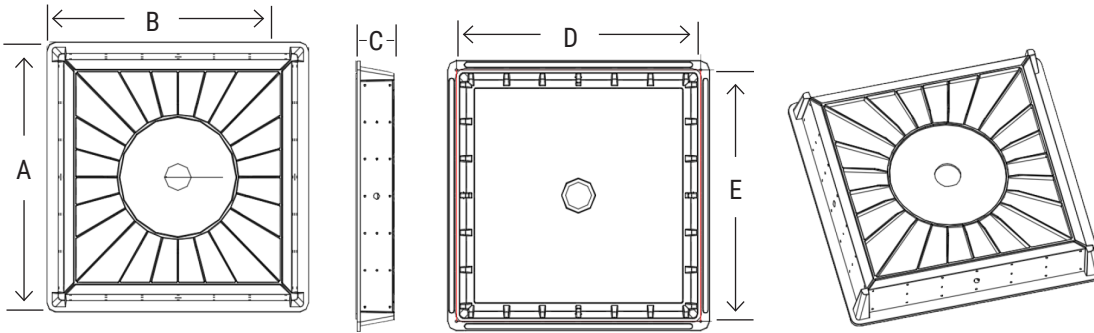

PRODUCT	A	B	C	D	E
PGS	13.8 in (350 mm)	13.8 in (350 mm)	2.6 in (66 mm)	12.8 in (325 mm)	12.8 in (325 mm)

PHOTOMETRICS

