

# PARKING LOT LIGHT SERIES

## High Powered Parking Lot Light

Type:

Fixture:



### TECHNICAL DATA

PRODUCT	PKLH-568L
WATTAGE	400W
LUMENS	56800 LM
EFFICACY	142 LM/W
CCT	*4000K, 5000K
VOLTAGE	120 - 277V / 277V - 480V
DIMMING	1-10VDC
CRI	70
FINISH	DARK BRONZE, RAL COLOR CODE
LIGHTING ANGLE	TYPE III , *IV
POWER FACTOR	0.9
WORKING TEMP.	-22°F ~ 113°F

### MOUNTING OPTIONS




**PKL2-TA-SLP**  
Slip-Fitter



**PKL2-TB-S2P**  
Arm Mount



**PKL2-TC-TRN**  
Trunnion



**PKL2-TB-ADPT**  
Pole Adapter

### DESCRIPTION

Our High Powered Parking Lot Light is wrapped in a die-cast aluminum to aid in better cooling. The optics has been greatly improved to help light utilization and evenness. In turn furthering luminous efficiency and a long work life.

### INTENDED USE

Our Parking Lot light series is widely used in different outdoor environments, and is suitable for wet locations. Our product is excellent for; museums, art galleries, underground parking lots, buildings, lawns, industrial areas, residential areas, sidewalks, schools & many more applications.



### ORDERING INFORMATION

STANDARD ITEM: **PKLH-568L-U-50K-T3-DB**

OR CUSTOMIZE BELOW:

-  -  -  -  -

Series	Lumen Package	Voltage	CCT	Optics	Finish
<b>PKLH</b> - (High Powered Parking Lot Light)	<b>568L</b> - (56800 lm, 400W)	<b>U</b> - (120 - 277V) <b>H</b> - (277 - 480V)	<b>40K</b> - *(4000K) <b>50K</b> - (5000K)	<b>T3</b> - (Type III) <b>T4</b> - *(Type IV)	<b>DB</b> - (Dark Bronze) <b>RAL</b> - *(Custom Color)

\*Customized product may cause additional lead time.

# PARKING LOT LIGHT SERIES

## High Powered Parking Lot Light

Type:

Fixture:

### FEATURES

#### CONSTRUCTION

Shell materials: aluminum & PC. Wrapped in die-cast aluminum.

#### FINISH

Dark bronze standard or RAL custom color code. Environment friendly polyester powder coating.

#### OPTICS

High precision molded proprietary polycarbonate lenses engineered for superior light distribution. Option of Type III, IV lenses available. (Lens III is standard)

#### ELECTRICAL

Class 2, constant current, 120V-277V/277-480V, 50-60 HZ, 0.95Amp@100V. 1-10V dimming circuit.

#### LISTINGS

UL certified. DLC Premium Listed.

\*\*IES files available upon request

### AVAILABLE ACCESSORIES

\*SOLD SEPARATELY



**PKL2-ANT-5**  
Motion Sensor



**RC-100**  
Remote Control



**PKLH-LAMP-ADP**  
Lamp Controller



**BL-PKL-PHOTO-3P**  
Photo Controller  
120-277V





**BL-PKL-PHOTO-3P-480V**  
Photo Cell  
277-480V



**PKLH-LORA-WAN**  
LoRa Gateway

### DIMENSIONS

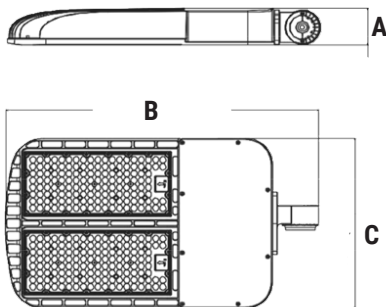

PRODUCT	A	B	C
<b>PKLH-568L</b>	<b>3.16 in</b> (80.2 mm)	<b>25.5 in</b> (647.7 mm)	<b>14.5 in</b> (368.3mm)