


SKY BRIDGE SERIES

Horizontal Pendant Luminaire

Type:

Fixture:

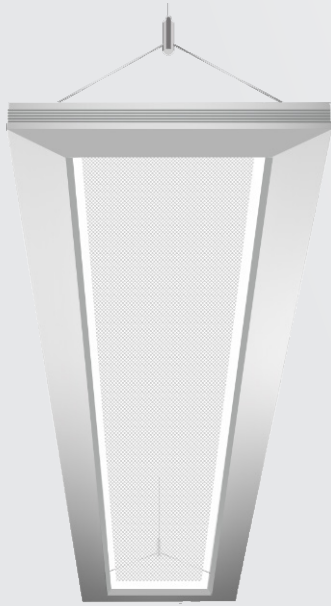

TECHNICAL DATA

PRODUCT	SBHP-84-46L		SBHP-88-92L
SIZE	8" X 4'		8" X 8'
WATTAGE	40W		80W
LUMENS	4600 LM		9200 LM
EFFICACY	115 LM/W		115 LM/W
CC / CCT	CC 30K/ 35K/ 40K	35K	35K
VOLTAGE	100 - 277V		
DIMMING	0 - 10V		
CRI	80		
POWER FACTOR	0.9		
WORKING TEMP.	32°F TO 122°F		
FINISH	WHITE		
DISTRIBUTION	45% UPLIGHT, 55% DOWNLIGHT		
CORD LENGTH	5FT SUSPENSION, POWER CORD		

SUSPENDED

Individual/Continuous link-ability


Built-in Driver

All drivers are built-in, and can be replaced easily, which is more convenient to fix and maintain.

CCT Adjustable- Puts flexibility at your fingertips

It is truly a modern luminaire that provides flexibility in how a space is illuminated, featuring independently-adjustable CCT by using dip switch, creating your optimal lighting experience.

- Adjustable CCT from 3000K, 3500K and 4000K
- Designed for all projects
- Lower your stock risk



Continuous Runs

One power can feed multiple lamps to minimize installation time and save labor cost. Runs of luminaires that are up to 80ft.

DESCRIPTION

Our Horizontal Pendant's design allows for 45% uplight and 55% downlight light distribution and product linkable capabilities with your finish of a standard white powder coat. This panels sturdy construction is paired with the ability to deliver light that provides quality illumination, a sleek design, and energy efficient performance.

INTENDED USE

Our Sky Bridge series aesthetic and controlled light makes it highly effective and efficient lighting solution for hotels, offices, retail outlets, restaurants, and many more.



ORDERING INFORMATION

STANDARD ITEM: **SBHP-84-46L-CC-U**

OR CUSTOMIZE BELOW:



Series	Size	Lumen Package	CCT
SBHP - (Sky Bridge Horizontal Pendant Luminaire)	84 - (8" x 4')*	46L - (4600 lm, 40W)	CC - (30K/35K/40K)* 35K - (3500K)
	88 - (8" x 8')	92L - (9200 lm, 80W)	35K - (3500K)

*CC only for (8" x 4')

PENDANT ACCESSORIES INCLUDED



SB-4RC-PF
4" Round Canopy



SB-2RC
2" Round Canopy

SKY BRIDGE SERIES

Horizontal Pendant Luminaire

Type:

Fixture:

FEATURES

CONSTRUCTION

Extruded aluminum housing.

FINISH

Powder coat white finish is standard.

OPTICS

High precision light guide made of PMMA material, allows distribution of controlled light to create 45% uplight, 55% downlight light distribution.



ELECTRICAL

Class 2 high efficiency driver. Standard constant current electronic drive with 0-10V dimming input. Thermal overload protection shuts down the luminaire when system temperatures exceed designed operating conditions.

LISTINGS

UL certified. DLC Listed. Listed for damp locations.

DIMENSIONS

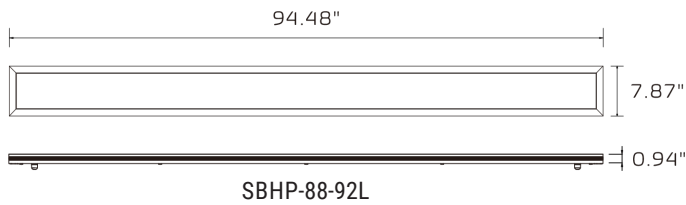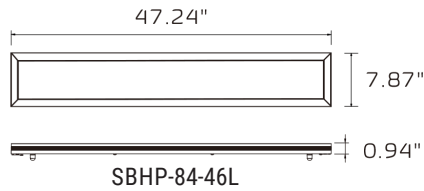

PENDANT ACCESSORIES FOR DRY CEILING

*SOLD SEPARATELY



PENDANT ACCESSORIES FOR DROP CEILING

*SOLD SEPARATELY



SEAMLESS CONTINUOUS RUNS

SEAMLESS

It's highly engineered luminaire joining design allows for simple and intuitive assembly in the field without tools. Its junction plate ensures that luminaire rows snap into a laser straight line.

CONTINUOUS RUNS

One power can feed multiple lamps to minimize installation time and save labor cost. Runs of luminaires that are up to 80ft in length are designated. This means that the run is comprised of a combination of 4ft and/or 8ft sections to be assembled on site using our joining system.

MODEL	MAX CONNECTING QTY IN 120VAC	MAX CONNECTING QTY IN 230VAC	MAX CONNECTING QTY IN 277VAC
SBHP84	9 PCS	18 PCS	20 PCS
SBHP88	4 PCS	8 PCS	10 PCS