

SKY BRIDGE SERIES


Vertical Pendant Luminaire
Internal Driver

Type:

Fixture:

TECHNICAL DATA

PRODUCT	SBVPI-40W-DF	SBVPI-40W-LU
WATTAGE	40W	
OPTICS	DIFFUSER	LOUVER
EFFICACY	100 LM/W	90 LM/W
CC/ CCT	CC (30K, 35K, 40K), 3000K, 3500K, 4000K	
VOLTAGE	110 - 277VAC	
DIMMING	0 - 10V	
CRI	80	
POWER FACTOR	0.9	
THD	20%	
LIGHT DISTRIBUTION	DIRECT, INDIRECT*	
DRIVER	INTERNAL	

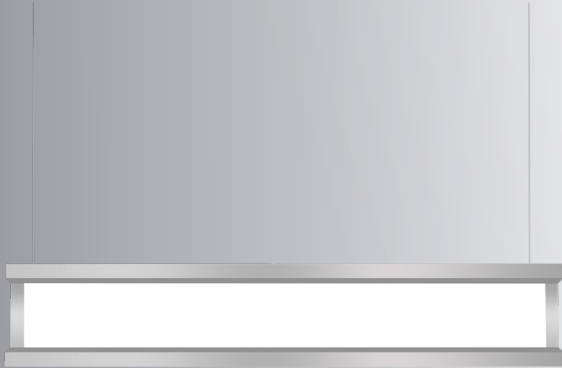

MOUNTING



SUSPENDED

Individual/ Continuous
link-ability

DESCRIPTION

Our Sky Bridge Vertical Pendant Luminaire fixture combines modern design and intuitive engineering to deliver an unmatched performance with our CCT adjustable technology you can switch between the color temperature to fit the environment it is in.

INTENDED USE

Our Sky Bridge Series modern aesthetic makes it perfect for a variety of indoor spaces. The pendant is perfect for illuminating offices, entryways, conference rooms, retail spaces, lobbies, and many other applications.




ORDERING INFORMATION

STANDARD ITEM: **SBVPI-40W-DF-CC-DR**

OR CUSTOMIZE BELOW:

<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>
Series		Wattage		Optics		CCT		Light Distribution
SBVPI - (Sky Bridge Vertical Pendant Internal Driver)		40W		DF - (Diffuser) LU - (Louver)		CC - (30K, 35K, 40K) 30K - (3000K) 35K - (3500K) 40K - (4000K)		DR - (Direct) ID - (Indirect)*

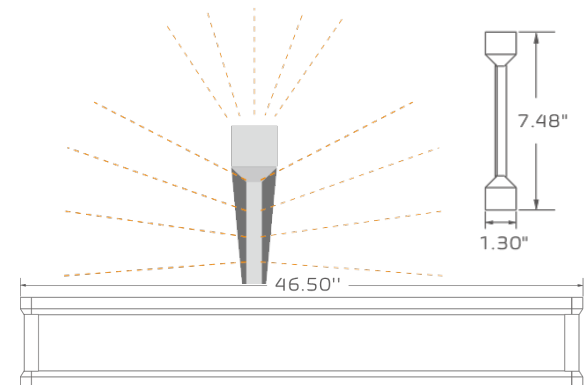

*Only Diffuser optic allows Indirect light distribution

SKY BRIDGE SERIES

Vertical Pendant Luminaire
Internal Driver

Type:

Fixture:

FEATURES

CONSTRUCTION

Aluminum housing.

FINISH

Powder coat silver finish is standard coloring.

ELECTRICAL

Class 2 high efficiency driver standard constant current electronic drive with 0-10V dimming input: dimming from 100% down to 10%.

LISTINGS

UL certified. 5 year limited warranty.

PENDANT ACCESSORIES FOR DRY CEILING

*SOLD SEPARATELY




SB-4RC-PF

4" Round Canopy



SB-4SC-PF

4" Square Canopy



SB-2RC

2" Round Canopy




SB-2SC

2" Square Canopy

PENDANT ACCESSORIES FOR DROP CEILING

*SOLD SEPARATELY



SB-4RTG-PF

T-Grid Hanger (Feed)
+ 4" Round Canopy



SB-4STG-PF

T-Grid Hanger (Feed)
+ 4" Square Canopy



SB-2RTG


T-Grid Hanger (Feed)
+ 2" Round Canopy




SB-2STG

T-Grid Hanger (Feed)
+ 2" Square Canopy


LIGHTING DISTRIBUTION



DIRECT



GENERAL DIFFUSE
*EXT. DRIVER ONLY



INDIRECT

When suspended, the Sky Bridge Vertical can provide smooth direct or indirect distribution, allowing for wider spacing between fixtures and better ceiling light uniformity.

PHOTOMETRY

