

SOL SERIES

Architectural Round Pendant Luminaire

Type:

Fixture:

TECHNICAL DATA

| PRODUCT | SCLR-D45 | SCLR-D60 | SCLR-D75 | SCLR-D90 | SCLR-D120 |
|----------------|---|----------|----------------|-----------------|---------------------------|
| WATTAGE | 30W | 60W | 60W / 80W | 80W / 100W | 100W / 120W / 150W |
| SIZE | 1.5' | 2' | 2.5' | 3' | 4' |
| LUMENS | 3000 LM | 6000 LM | 6000 / 8000 LM | 8000 / 10000 LM | 10000 / 12000 / 150000 LM |
| VOLTAGE | 100V-277V | | | | |
| CRI | >80 Ra | | | | |
| EFFICACY | 100 LM/W | | | | |
| UPLIGHT | 30% UPLIGHT 70% DOWNLIGHT | | | | |
| DIMMING | 0-10V | | | | |
| CCT | 3500K, 4000K | | | | |
| LIFETIME (L70) | >50,000 HRS | | | | |
| POWER FACTOR | >0.9 | | | | |
| INPUT POWER | Stays constant over lifespan of fixture | | | | |
| THD | <20% | | | | |
| WORKING TEMP. | -4°F ~ 104°F | | | | |


EYE-PLEASING ILLUMINATED CIRCLES UTILIZE HIGHLY EFFICIENT LUMINARIES



SUSPENDED

CEILING

Available in 5 sizes and multiple lumen output options to fit for various ceiling heights



DESCRIPTION

Beautiful, modern, and stylish all describe the SOL. Multiple diameters, color temperatures and mounting options will enhance any professional interior. This fixture has amazing downlight and uplight when suspended. Interior designers will certainly be impressed as well.

INTENDED USE

The SOL is ideal for illuminating gyms, ball rooms, conference rooms, hotel lobbies, restaurant, and reception areas.



ORDERING INFORMATION

STANDARD ITEM: **SCLR-D60-60W-S-35K-BK**

OR CUSTOMIZE BELOW:

- - - - -

| Series | Size | Wattage | Mounting | CCT | Finish |
|---------------------------------|---------------|--------------------|----------------------------------|--------------------------------|--|
| SCLR - (Sol Round Luminaire) | D45 - (1.5')* | 30W | S - (Suspended) C - (Ceiling) | 35K - (3500K) 40K - (4000K) | BK - (Black) WH - (White) ME - (Metallic Silver)* RD - (Fabulous Red)* GR - (Golf Green)* OR - (Bright Orange)* YL - (Amber Yellow)* |
| | D60 - (2') | 60W | | | |
| | D75 - (2.5')* | 60W / 80W | | | |
| | D90 - (3')* | 80W / 100W | | | |
| | D120 - (4')* | 100W / 120W / 150W | | | |

*Customized Product. May cause additional lead time.

Architectural Round Pendant Luminaire

Type:

Fixture:

FEATURES

CONSTRUCTION

Enclosure constructed of 18-Gauge spun steel housing with high reflective powder-coated finish, pendant/suspension style mounting with upright ring.

FINISH

High reflective powder-coated finish.

OPTICS

0.125" thick white acrylic diffuser secured to housing ensures uniformed illumination.


ELECTRICAL

Class 2, constant current, 100V-277V, 50-60 Hz.


LISTINGS

ETL certified.

**IES Files available upon request

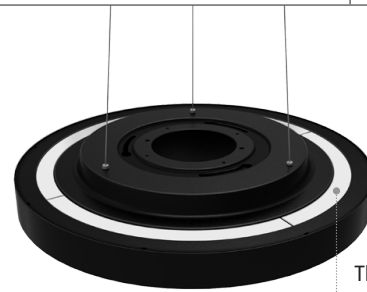


This fixture comes with amazing uplight/halo illumination feature

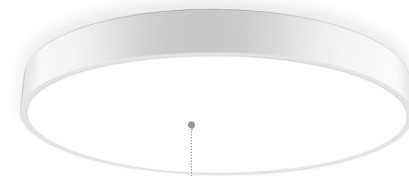


Long lasting LEDs with high efficiency performance and a dimmable driver to provide exceptional quality of illumination

DIMENSION

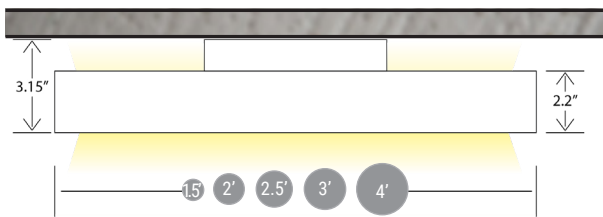

CEILING MOUNTED

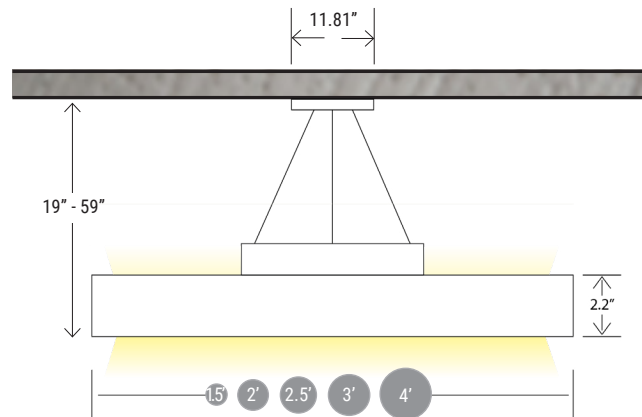

SUSPENDED/PENDANT