

# TROFFER SERIES

## Color Changeable Troffer

Type:

Fixture:



### TECHNICAL DATA

PRODUCT	STR-22-25W-CC	STR-24-40W-CC
WATTAGE	25W	40W
LUMENS	3087 LM	5070 LM
EFFICACY	125 LM/W	126 LM/W
SIZE	23.75" X 23.75"	23.75" X 47.75"
VOLTAGE	100V-277V	
CRI	>80+	
CC	30K/40K/50K Color Changeable	
BEAM ANGLE	110°	
POWER FACTOR	>0.915	
THD	<12.9%	
WORKING TEMP.	-40°F ~ 104°F	
DIMMING	0-10	



Two seam covers prevent light from escaping the edges of the fixture (Light Bleed), and protects against dirt and debris.



Luminaire sides and ends are hemmed in for safe, easy handling.

### DESCRIPTION

The beautiful and sophisticated look of the Color Changeable Tunable Troffer is perfect for any indoor recessed ceiling. With its seam covers light bleed is eliminated and provides a clean look whether the fixture is on or off. Switchable color change between 3000K, 4000K, 5000K provides smooth downlight for even the most sensitive eyes. Occupancy sensor along with its daylight harvesting capability allows for money savings and low power consumption.

### INTENDED USE

The Troffer series is ideal for illuminating schools, office buildings, commercial areas needing an aesthetically pleasing fixture with multiple color changing lumen capability and occupancy.



### ORDERING INFORMATION

STANDARD ITEM: **STR-24-40W-CC**

OR CUSTOMIZE BELOW:

Series	Size	Wattage	CC
<b>STR</b> Color Changeable Troffer	<b>22</b> - (2'x2') <b>24</b> - (2'x4')	<b>25W</b> - (For 2' x 2') <b>40W</b> - (For 2' x 4')	<b>CC</b> - (30K/40K/50K)

Simple slide access to the dip switch controller



# TROFFER SERIES

## Color Changeable Troffer

Type:

Fixture:

### CONSTRUCTION

Durable rolled-steel housing provides strength and uniformity. Sides and ends are hemmed for a clean easy handling. Ultra thin and lightweight design targets a broad range of plenum spaces which allows for easy installation. Equipped with occupancy and daylight harvesting sensors. Diffuser end covers prevent light bleed.

### FINISH

Environmentally friendly polyester powder coatings are formulated for high-durability and long-lasting color, and contain no VOC or toxic heavy metals.

### OPTICS

Unique luminaire design creates perfect balance of both horizontal and vertical illumination. Optimized smooth acrylic lens eliminates pixelation and delivers a low-glare, diffused light distribution.


### ELECTRICAL

Class 2, constant current, 100V-277V, 50/60 HZ, 0.95Amp@100V.  
0-10V dimming.


### LISTINGS

ETL certified. IC Rated. IES file available. For DLC compliant requirement, please contact sales department for more details

## DIMENSION

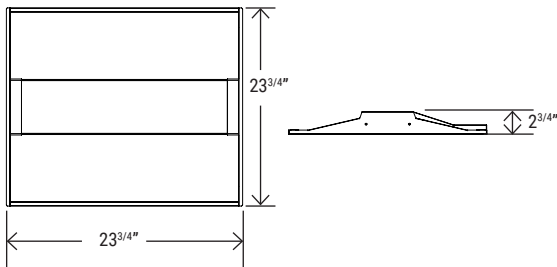

**STR-22-25W-CC**

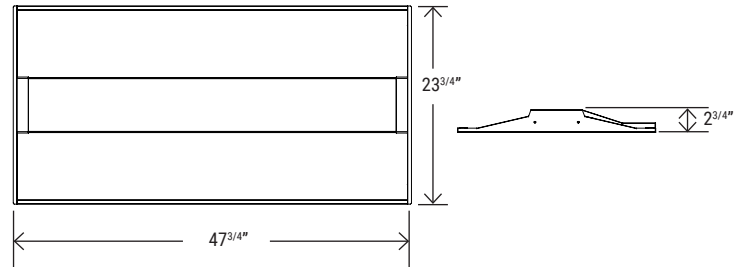

**STR-24-40W-CC**

Simple slide switch to change the Color Changeable options.

