

VAPOR TIGHT Series

Vapor Tight

Type:


Fixture:



TECHNICAL DATA

PRODUCT	VT-2F-35L	VT-4F-63L
WATTAGE	25W	45W
LUMENS	3550 LM	6390 LM
EFFICACY	142 LM/W	
DIMMING	0-10V	
VOLTAGE	120-277V	
CRI	RA>80	
CCT	5000K	
LIGHTING ANGLE	118°	
POWER FACTOR	>0.9	
DRIVER	WELED POWER	
WORKING TEMP.	-22F° ~ 113°F	

MOUNTING OPTION

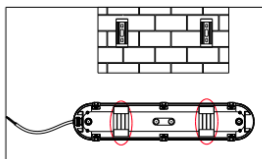

SURFACE MOUNTING

DESCRIPTION

Providing a dust, moisture free diffuser and body gives the Vapor Tight corrosion, direct water and ice exposure resistance. Many industries have environments that have a need for this type of light which makes it very popular.

INTENDED USE

The Vapor Tight is ideal for illuminating food processing plants, warehouses, beverage coolers, car washes, and parking structures.



ORDERING INFORMATION

STANDARD ITEM: **VT-4F-63L-50K**

OR CUSTOMIZE BELOW:

Series	Size	Lumen Package	CCT
VT Vapor Tight	2F (2 feet)	35L (3550 LM)	50K (5000K)
	4F (4 feet)	63L (6390 LM)	

AVAILABLE ACCESSORIES

*SOLD SEPARATELY



OPTION SENSOR
VT-MC-77V

VAPOR TIGHT Series

Vapor Tight

Type:

Fixture:

FEATURES

CONSTRUCTION

Impact-resistant polycarbonate body and diffuser with stainless-steel diffuser clips. Moisture and dust proof seal, u-brackets, wire nuts, cord grip, drywall screws and anchors, plastic plug.

FINISH

Light gray body with frosted diffuser and stainless-steel lens clips.

OPTICS

High-impact frosted PC cover.

ELECTRICAL


Class 2, Constant Current, 50/60 Hz., 120 - 277V, 2.5kV surge protection. 0-10V dimming.

LISTINGS


UL certified. DLC Listed.

DIMENSIONS

FRONT VIEW

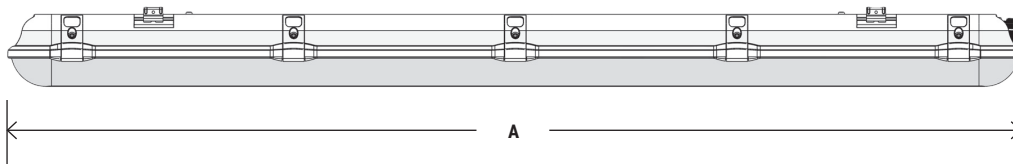


SIDE VIEW




PRODUCT	A	B	C
VT-2F	23.62 in (600mm)	4.72 in (120mm)	3.15 in (80mm)
VT-4F	47.24 in (1200mm)	4.72 in (120mm)	3.15 in (80mm)

PHOTOMETRICS

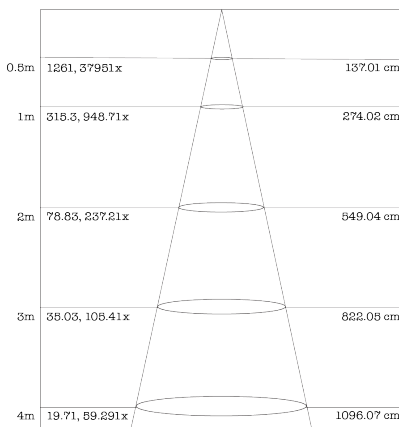

CO PLANE ISOLUX DIAGRAM (Unit: lx)

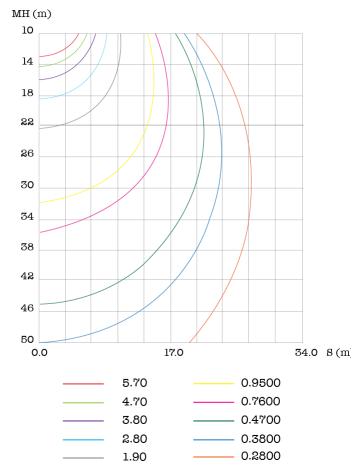

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

