

WALL PACK SERIES

Adjustable Wall Pack

Type:

Fixture:



TECHNICAL DATA


PRODUCT	WPA-27L	WPA-58L	WPA-91L	WPA-131L
WATTAGE	20W	45W	70W	100W
LUMENS	2720 LM	5895 LM	9170 LM	13100 LM
EFFICACY	136 LM/W			
CCT	50K			
VOLTAGE	120-277 VAC			
DIMMING	0-10V			
CRI	Ra>80			
FINISH	DARK BRONZE, WHITE, BLACK, SILVER			
POWER FACTOR	0.9			
DRIVER	NOVBO POWER			
WORKING TEMP.	-22°F ~ 113°F			

DESCRIPTION

The Adjustable Wall Pack cast aluminum design assists in better cooling and light quality. The optical design also improves light utilization and evenness.

INTENDED USE

The Wall Pack Series is widely used as both indoor + outdoor lighting, including wet locations. This product is excellent for galleries, shopping malls, office buildings, landscaping and entryways.

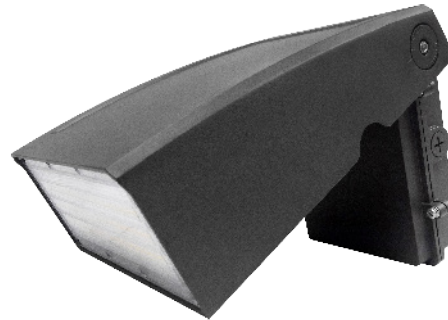

DIMMABLE



ORDERING INFORMATION

STANDARD ITEM: **WPA-58L-50K-DB**

OR CUSTOMIZE BELOW:



Series	Lumen Package	CCT	Finish
WPA (Adjustable Wall Pack)	27L - (2720 lm, 20W) 58L - (5895 lm, 45W) 91L - (9170 lm, 70W) 131L - (13100 lm, 100W)	50K (5000K)	DB (Dark Bronze) W (White) B (Black) S (Silver)

WALL PACK SERIES

Adjustable Wall Pack

Type:

Fixture:

FEATURES

CONSTRUCTION

Shell Materials: Aluminum and PC.

FINISH

Painted in a dark bronze, black, white, or silver finish. Based in a rust and corrosion proof with polyester coating.

OPTICS

Polycarbonate.


ELECTRICAL

Class 2, constant current, 120V-277V, 50-60 HZ, 0-10V dimming

LISTINGS

UL certified. DLC Premium Listed.

DIMENSIONS

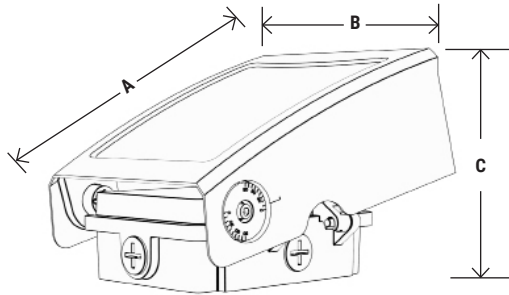

PRODUCT	A	B	C
WPA-27L	8.08 in (205.2 mm)	6.50 in (165.1 mm)	3.84 in (97.5 mm)
WPA-58L	8.08 in (205.2 mm)	6.50 in (165.1 mm)	3.84 in (97.5 mm)
WPA-91L	11.05 in (280.6 mm)	8.51 in (216.1 mm)	4.41 in (112 mm)
WPA-131L	13.01 in (330.4 mm)	10.52 in (267.2 mm)	4.96 in (125.9 mm)

AVAILABLE ACCESSORIES



*SOLD SEPARATELY



WPA-PHOTO

Photocell sensor
Power consumption up to 1000W

PHOTOMETRICS

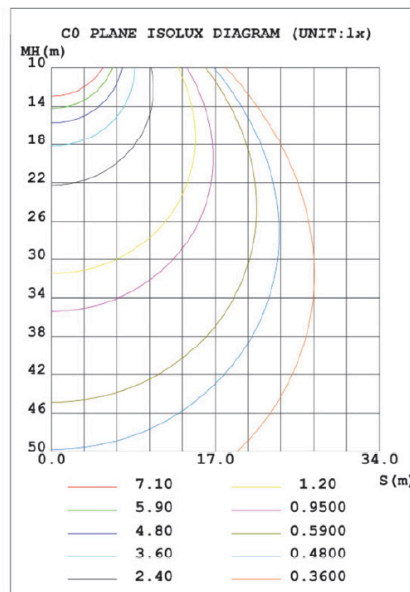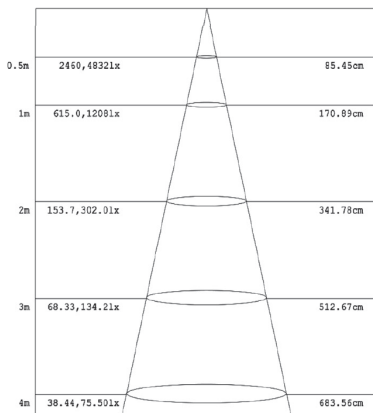

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

