

EDGE-LIT PANEL SERIES

High Performance Edge-Lit Panel

Type:


Fixture:

TECHNICAL DATA

PRODUCT	WTG-ELP-22
SIZE	2' x 2'
WATTAGE	33.8W
LUMENS	3946 LM
EFFICACY	116.77 LM/W
CCT	5000K
VOLTAGE	100 - 277V
DIMMING	0 - 10V
CRI	83.9
LENS	ACRYLIC
POWER FACTOR	0.99



PRODUCT DIAGRAM

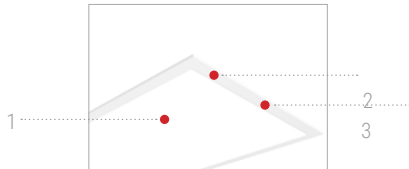

1. PMMA light guide plate
2. Aluminum Frame
3. Earthquake Clips

DESCRIPTION

Replace those old fluorescent fixtures with cost saving, light weight, even light transmittance Edge-Lit Panels. WTG-ELP creates an even light distribution that stands out from counterparts. Multiple sizes allow for ease of installation on any drop T-bar style ceiling can be surface mounted with frames (Sold Separately).

INTENDED USE

The WTG Edge-Lit Panel is ideal for any commercial building requiring a drop/T-bar ceiling compatible fixture.



ORDERING INFORMATION

STANDARD ITEM: **WTG-ELP-22-39L-50K**

OR CUSTOMIZE BELOW:

[]	-	[]	-	[]	-	[]
Series		Size		Lumen Package		CCT
WTG-ELP - (WTG Edge-Lit Panel Series)		22 - (2' x 2')		39L - (3946.73 lm, 33.8W)		50K - (5000K)

EDGE-LIT PANEL SERIES

High Performance Edge-Lit Panel

Type:

Fixture:

FEATURES

CONSTRUCTION

Lightweight steel housing with aluminum frame, acrylic diffuser, earthquake clips, multiple knock-outs for power supply and sensor area. Low profile driver mounted on edge. Multiple provisions for emergency back up battery and bracket installation.

FINISH

Environmentally friendly polyester powder coatings are formulated for high durability and long-lasting color, and contain VOC or toxic heavy metals.

OPTICS

Acrylic diffuser provides even smooth light transmittance.


ELECTRICAL

Constant Current, 100 - 277V 28-42 VDC, 0.78 A, 50 - 60 Hz, requires separate circuit dimming, 0-10V dimming.

LISTINGS

UL certified. DLC listed.

DIMENSIONS

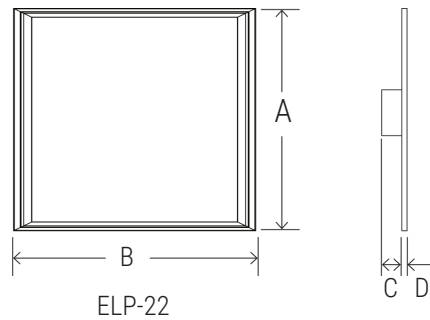

Product	A	B	C	D
WTG-ELP-22	23.75 in (603.25 mm)	23.75 in (603.50 mm)	1.97 in (50 mm)	.47 in (11.9 mm)