

# DISK LIGHT SERIES

## Slim Disk Luminaire

Project Name:


Fixture:



### TECHNICAL DATA

| PRODUCT       | BL-DSKL7.5-15YZZ    |
|---------------|---------------------|
| WATTAGE       | 15W                 |
| LUMENS        | 1100 LM             |
| EFFICACY      | 73 LM/W             |
| DIAMETER      | 7.5"                |
| VOLTAGE       | 120V                |
| CRI           | >80                 |
| CCT           | 3000K, 4000K, 5000K |
| BEAM ANGLE    | 110°                |
| POWER FACTOR  | >0.9                |
| THD           | <15%                |
| WORKING TEMP. | -40°F ~ 104°F       |

### EASY INSTALLATION FOR MULTIPLE J-BOXES

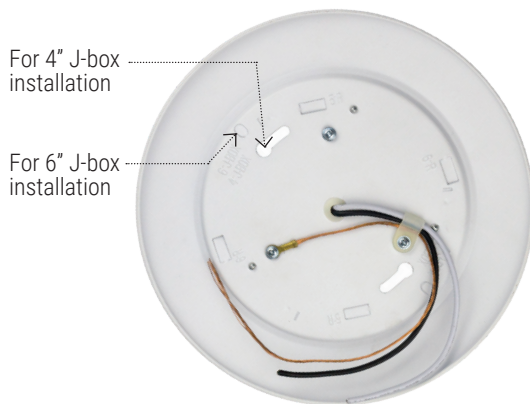

### DESCRIPTION

With its sleek design, the Disk Light melts into the ceiling providing much needed downlight lacking in many older residential/commercial locations. Eliminating the need for cans and being lightweight make them a smart choice for contractors.

### INTENDED USE

The Disk Light is ideal for use in bathrooms, kitchens, living and family rooms, hallways, and finished basement ceilings.



DIMMABLE



50000 HOURS LIFE SPAN

5 YEAR LIMITED WARRANTY

### ORDERING INFORMATION

EXAMPLE: **BL-DSKL-7.5-15W**

|  |   |                   |   |                       |
|--|---|-------------------|---|-----------------------|
|  | - |                   | - |                       |
| Series                                   |   | Size              |   | Wattage               |
| <b>BL-DSKL</b><br>Slim Disk Light Series |   | <b>7.5 (7.5")</b> |   | <b>15W (15 Watts)</b> |

# DISK LIGHT SERIES

## Slim Disk Luminaire

Project Name:

Fixture:

### FEATURES

#### CONSTRUCTION

Aluminum alloy, rust and corrosion proof; polyester powder coating. Easy twisting slot for lens.

#### FINISH

Environmentally friendly polyester powder coatings are formulated for high-durability and long-lasting color, and contain no VOC or toxic heavy metals.

#### LENS

Frosted PC cover.


#### ELECTRICAL

Class 2, constant current, 120V, 50/60 HZ, 0.15Amp@100V. Requires separate Triac dimming circuit, dims as low as 10%

#### LISTINGS


ETL certified. Energy Star.

### DIMENSION

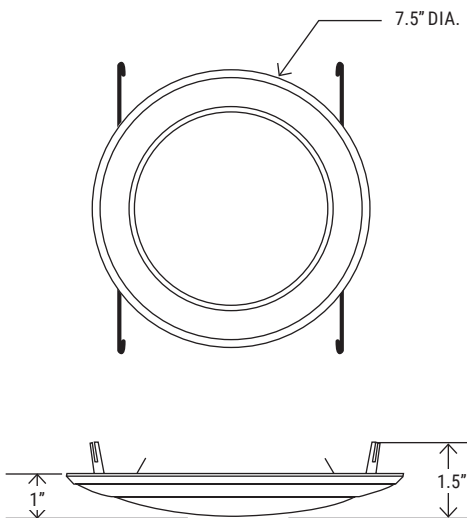


### PARTS

- 1-Lamp shade
- 2-Lamp chassis
- 3-Metal clip
- 4-Spring
- 5-Metal spring

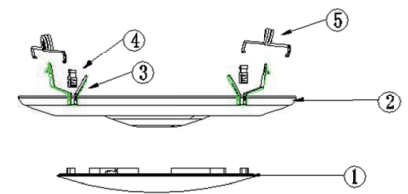

### Product size chart

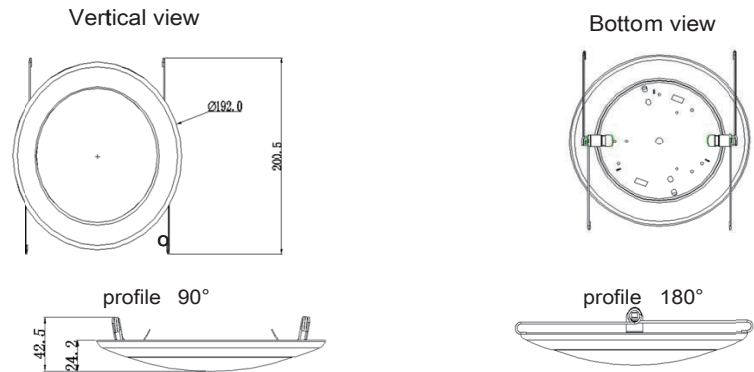

### PHOTOMETRICS

