

2'X2' TROFFER EDGE

Direct / Indirect Vertical Luminaire

Project Name:


Fixture:

EDGE
TECHNOLOGY



TECHNICAL DATA

PRODUCT	EDGE-22-32W
WATTAGE	32W
SIZE	2' X 2'
LUMENS	4000 LM
VOLTAGE	120V-277V
CRI	>80 Ra
EFFICACY	125 LM/W
CCT	3500K, 4000K, 5000K
LIFETIME (L70)	>50,000 HRS
POWER FACTOR	>0.9
INPUT POWER	Stays constant over lifespan of fixture
THD	<20%
WORKING TEMP.	-30°F ~ 122°F

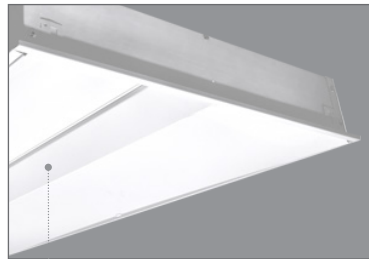

- Provides a Direct/Indirect optical distribution
- Up to 125 Lumens/Watt

DESCRIPTION

The Troffer Edge is the perfect combination of refined contemporary style and cutting-edge LED technology. Smooth rich downlight with recessed and suspended mounting styles lends it to be used on any ceiling surface.

INTENDED USE

The Troffer Edge is ideal for illuminating office spaces, lobbies, building hallways, garages, and medical centers.



ORDERING INFORMATION

EXAMPLE: **EDGE-22-32W-XTTD**

Series	Size/Wattage	CCT	CONTROL/OPTION
EDGE Direct / Indirect Vertical Luminaire	22-32W (2'x2', 32W)	35K (3500K) 40K (4000K) 50K (5000K)	MS (Motion Sensor) EM (Emergency Battery)

2'X2' TROFFER EDGE

Direct / Indirect Vertical Luminaire

Project Name:

Fixture:

FEATURES

CONSTRUCTION

Enclosure constructed of 22-gauge die-formed steel.

FINISH

Powder-coated finish.

OPTICS

Precision laser cut optical grade acrylic guide provides uniformed lighting distribution.

ELECTRICAL


Input voltage: 120V-277VAC. Standard Class 2 isolated drivers.

LISTINGS

ETL certified.

EDGE
TECHNOLOGY


Modern design ensures contemporary appearance that compliments architectural ceilings

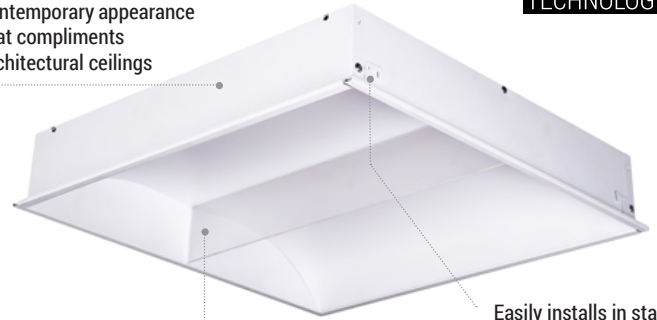

Precision laser cut optical grade acrylic guide

Easily installs in standard T-bar systems and certified to meet U.S safety standard

DIMENSION

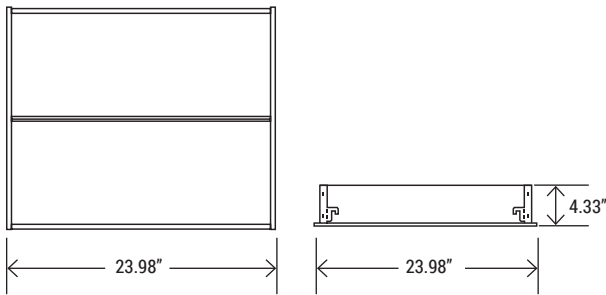

PHOTOMETRICS

