

HOSPITALITY SERIES

Glass Puff Open Flush Mount

Type:


Fixture:



TECHNICAL DATA

PRODUCT	PFG
WATTAGE	14W
LUMENS	980 LM
EFFICACY	70 LM/W
CC	(2700K, 3000K, 3500K, 4000K, 5000K) 5 Color Changeable
VOLTAGE	120V
DIMMING	TRIAC DIMMING
CRI	>80
EFFICIENCY	96%
POWER FACTOR	>0.9

DIMENSIONS

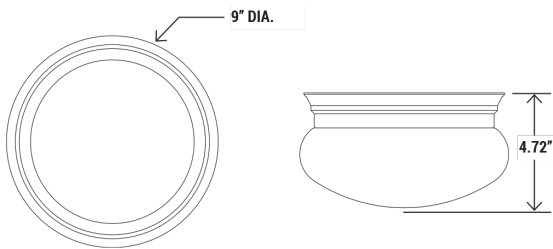

DESCRIPTION

The Glass Puff Open Flush Mount fixtures delivers more light brightness with less energy consumption. Even light distribution, 130° degree beam angle that shed light up your room or workspace. It includes classic globe shape shade frosted white glass lens with satin nickel accents. Simple, elegant design to complement the interior of steel construction ensures that this ceiling light will continue to perform well and look great for years to come.

INTENDED USE

Our Hospitality series is ideal for commercial areas. The perfect product to illuminate residential areas, hospitals, hotels, bathrooms, hallways, closets, and many more applications



ORDERING INFORMATION

STANDARD ITEM: **PFG-9-9L-5CC**

OR CUSTOMIZE BELOW:

[]	-	[]	-	[]	-	[]
Series		Size		Lumen Package		CC
PFG - (Glass Puff Open Flush Mount)		9 - (9")		9L - (980 lm, 14W)		5CC - 5 Color Changeable (2700K, 3000K, 3500K, 4000K, 5000K)

FEATURES

CONSTRUCTION

Steel Plate.

FINISH

Satin Nickel. Rust and corrosion proof with polyester coating.

OPTICS

White glass.

ELECTRICAL

Line voltage. Triac dimming @ 120V down to 10% to off.

LISTINGS

ETL certified for damp location. Energy Star listed.