

HOSPITALITY FLUSH-MOUNT SERIES

Double Ring Flush Mount Customizable

Type:

Fixture:



TECHNICAL DATA

PRODUCT	PFR					
SIZE	10"	12"	14"	16"	18"	24"
WATTAGE	14W	18W	22W	26W	30W	45W
LUMENS	1000 LM	1380 LM	1852 LM	1960 LM	2160 LM	3600 LM
EFFICACY	71 LM/W	76 LM/W	75 LM/W			80 LM/W
CCT	2700K, 3000K, 3500K, 4000K, 5000K					
VOLTAGE	120V					
DIMMING	TRIAC					
CRI	80, 90					
EFFICIENCY	96%					
POWER FACTOR	>0.9					


PRODUCT	A	B
PFR-10	10"	2.8"
PFR-12	12"	3.4"
PFR-14	14"	3.75"
PFR-16	16"	4.3"
PFR-18	18"	4.8"
PFR-24	24"	4.5"

DESCRIPTION

The Double Ring Flush Mount Customizable fixture helps you save more energy than traditional incandescent surface mount fixture, with the pleasant light quality you expect from an incandescent surface mount fixture. 5 year limited warranty assures the rated 50,000 lifetime. The LED ceiling lights have a CRI 80+ or 90+ rating, high lumens allows the light to render more closely to the object true and original color, thus producing more accurate and vivid lighting than other lighting alternatives.

INTENDED USE

Our Hospitality series is ideal for commercial areas. The perfect product to illuminate residential areas, hospitals, hotels, bathrooms, hallways, closets, and many more applications.

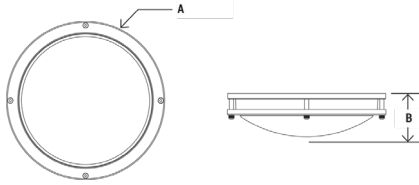

ORDERING INFORMATION

STANDARD ITEM: **PFR-12-13L-50K-90-BZ**

OR CUSTOMIZE BELOW:



Series	Size	Lumen Package	CCT	Finish	
PFR - (Double Ring Flush Mount Customizable)	10 - (10")	10L - (1000 lm, 14W)	27K - (2700K)	BZ - (Bronze)	
	12 - (12")	13L - (1380 lm, 18W)	30K - (3000K)	BN - (Brushed Nickel)	
	14 - (14")	18L - (1852 lm, 22W)	35K - (3500K)	RAL - (RAL Custom Color Code)	
	16 - (16")	19L - (1960 lm, 26W)	40K - (4000K)		
	18 - (18")	21L - (2160 lm, 30W)	50K - (5000K)		
	24 - (24")	36L - (3600 lm, 45W)			
	CUS - *(Custom Size, call factory for detail)				

FEATURES

CONSTRUCTION

Cold rolled steel plate.

FINISH

Rust and corrosion proof with polyester powder coating.

OPTICS

White acrylic.

ELECTRICAL

Line voltage, triac dimming @ 120V down to 10% to off.

LISTINGS

ETL certified for damp location. Energy Star listed.