

COLOR TUNABLE VAPORTIGHT Series

Vaportight/Parking Garage Linear

Project Name:

Fixture:



TECHNICAL DATA

PRODUCT	VT-465-40W-XCCD
WATTAGE	40W
LUMENS	4618.97 LM
EFFICACY	114.7 LM/W
DIMMING	0-10V DIMMING
VOLTAGE	100V-277V
CRI	81.4
CCT	3000K/4000K/5000K CHANGEABLE
BEAM ANGLE	110°
POWER FACTOR	>0.94
THD	<15.2%
WORKING TEMP.	-40°F ~ 104°F



HOUSING DETAILS

Diffuse polycarbonate lens for low glare and maximum protection

1/2" opening/drill out for conduit and bushing/cord entry

Stainless steel door clips

Impact-resistant polycarbonate

DESCRIPTION

Providing a dust, moisture free diffuser and body gives the Vaportight corrosion, direct water and ice exposure resistance. Switchable color change between 3000K, 4000K, 5000K provides smooth downlight. Many industries have environments that have a need for this type of light which makes it very popular.

INTENDED USE

The Vaportight is ideal for illuminating food processing plants, meat lockers, beverage coolers, car washes, and parking structures.



ORDERING INFORMATION

EXAMPLE: **VT-465-40W-XCCD**



Series	Size	Wattage	CCT
VT Vapor tight/Parking Garage Linear	465	40W	30K/40K/50K Color Changeable

COLOR TUNABLE VAPORTIGHT Series

Vaportight/Parking Garage Linear

Project Name:

Fixture:

FEATURES

CONSTRUCTION

Impact-resistant polycarbonate body and diffuser with stainless-steel diffuser clips. moisture and dust proof seal, u-brackets, wire nuts, s-hooks, cord grip, drywall screws and anchors, plastic plug.

FINISH

Light gray body with frosted diffuser and stainless-steel lens clips.

OPTICS



High-impact frosted PC cover.

ELECTRICAL


Class 2, Constant Current, 50/60 Hz., 120 - 277V, 2.5kV surge protection.

LISTINGS


ETL certified. DLC Listed. Luminaire is IP66 rated.

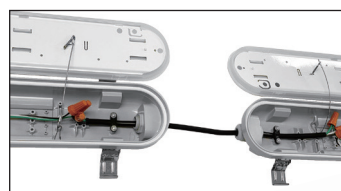

Link options (up to 10 pcs)

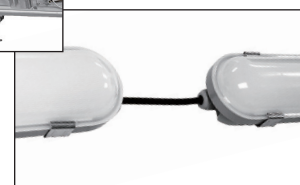

DIMENSION

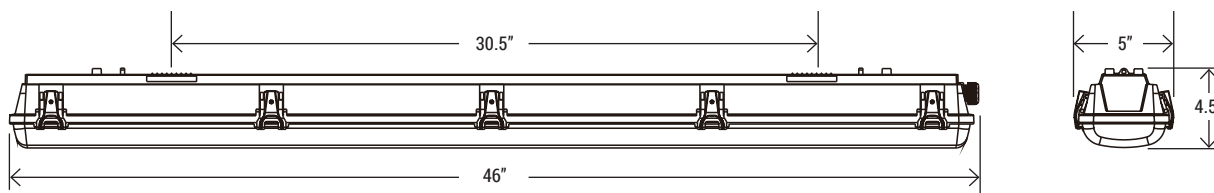

PHOTOMETRICS

