

# VAPORTIGHT Series

## Vaportight/Parking Garage Linear

Project Name:

Fixture:



### TECHNICAL DATA

PRODUCT	VT-465-40W-XTTN-4000K	VT-465-40W-XTTN-5000K
WATTAGE	40W	40W
LUMENS	4003 LM	4290 LM
EFFICACY	104 LM/W	110 LM/W
DIMMING	NON-DIMMING	
VOLTAGE	100V-277V	
CRI	>82	
CCT	4000K, 5000K	
BEAM ANGLE	110°	
POWER FACTOR	>0.94	
THD	<15.2%	
WORKING TEMP.	-40°F ~ 104°F	



#### HOUSING DETAILS

Diffuse polycarbonate lens for low glare and maximum protection

1/2" opening/drill out for conduit and bushing/cord entry

Stainless steel door clips

Impact-resistant polycarbonate

### DESCRIPTION

Providing a dust, moisture free diffuser and body gives the Vaportight corrosion, direct water and ice exposure resistance. Many industries have environments that have a need for this type of light which makes it very popular.

### INTENDED USE

The Vaportight is ideal for illuminating food processing plants, meat lockers, beverage coolers, car washes, and parking structures.



### ORDERING INFORMATION

EXAMPLE: **VT-465-40W-XTTN-40K / VT-465-40W-XTTN-50K**



Series	Size	Wattage	CCT
VT Vapor tight/Parking Garage Linear	465	40W	40K (4000K) 50K (5000K)

# VAPORTIGHT Series

## Vaportight/Parking Garage Linear

Project Name:

Fixture:

### FEATURES

#### CONSTRUCTION

Impact-resistant polycarbonate body and diffuser with stainless-steel diffuser clips. moisture and dust proof seal, u-brackets, wire nuts, s-hooks, cord grip, drywall screws and anchors, plastic plug.

#### FINISH

Light gray body with frosted diffuser and stainless-steel lens clips.

#### OPTICS

High-impact frosted PC cover.


#### ELECTRICAL

Class 2, Constant Current, 50/60 Hz., 120 - 277V, 2.5kV surge protection.

#### LISTINGS

ETL certified. DLC Listed. Luminaire is IP66 rated.

### DIMENSION

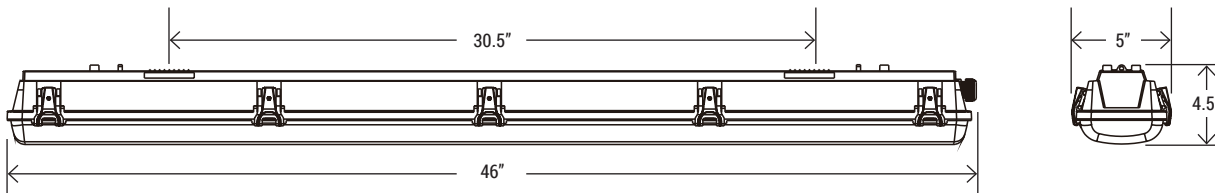

### PHOTOMETRICS

