

WALL PACK SERIES

Semi Cut-Off Wall Pack Luminaire

Type:

Fixture:



TECHNICAL DATA

PRODUCT	WP03B-060W	WP03B-080W	WP03B-100W	WP03B-120W
WATTAGE	60W	80W	100W	120W
LUMENS	7303 LM	8927 LM	12391 LM	13984 LM
EFFICACY	119 LM/W	110 LM/W	127 LM/W	117 LM/W
VOLTAGE	100V-277V			
CRI	>74	>71	>74	>71
CCT	5000K	4000K, 5000K	5000K	5000K
BEAM ANGLE	100°			
POWER FACTOR	>0.936	>0.888	>0.951	>0.916
THD	<13.2%	<16.7%	<12.8%	<15.3%
WORKING TEMP.	-40°F ~ 104°F			

AVAILABLE ACCESSORIES SOLD SEPARATELY



WP03B-VSR-SC
Wall Pack Visor

DESCRIPTION

The Wall Pack is a robust light perfect for where higher strength materials are needed, such as alleyways and commercial and industrial areas. Handling the most extreme weather conditions and vandalism makes it a mount-it-and-forget-it friendly fixture.

INTENDED USE

WP03B series is ideal for illuminating alleyways, building faces, and commercial doorways.



ORDERING INFORMATION

STANDARD ITEM: WP03B-60W-277V-50K

OR CUSTOMIZE BELOW:

Series	Wattage	Voltage	CCT
WP03B Semi Cut-Off Wall Pack	60W 80W 100W 120W	277V (100V-277V)	50K (5000K) *40K (4000K)

*4000k 80W only

WALL PACK SERIES

Semi Cut-Off Wall Pack Luminaire

Type:

Fixture:

FEATURES

Precision die-cast aluminum housing

Dust-to-dawn photocell



Tempered glass

CONSTRUCTION

Precision die-cast aluminum housing, dust-to-dawn photocell.

FINISH

Rust and corrosion proof with polyester powder coating.

OPTICS

Tempered glass.



ELECTRICAL

Class 2, constant current, 100V-277V, 50-60 Hz.

LISTINGS

ETL certified. Luminaire is IP65 rated. DLC listed

DIMENSIONS

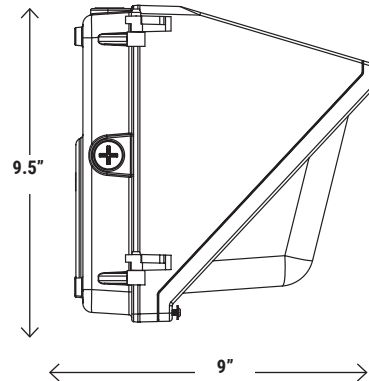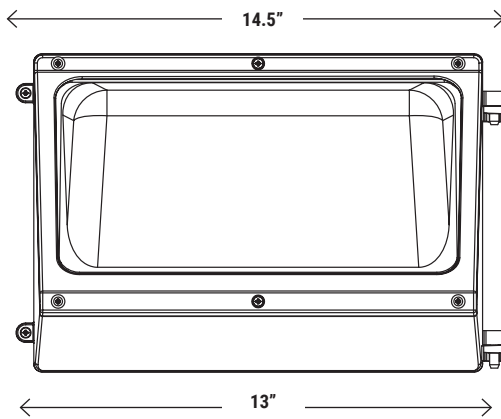

PHOTOMETRICS

